

## Exam Questions 350-601

Implementing and Operating Cisco Data Center Core Technologies

<https://www.2passeasy.com/dumps/350-601/>



### NEW QUESTION 1


Which virtual MAC address is the default for HSRP version 2 group 10?

- A. 0000.5E00.0110
- B. 0000.0C9F.F00A
- C. 3716.1350.1C0A
- D. 0000.0C9F.F010

Answer: B

### NEW QUESTION 2

Refer to the exhibit.

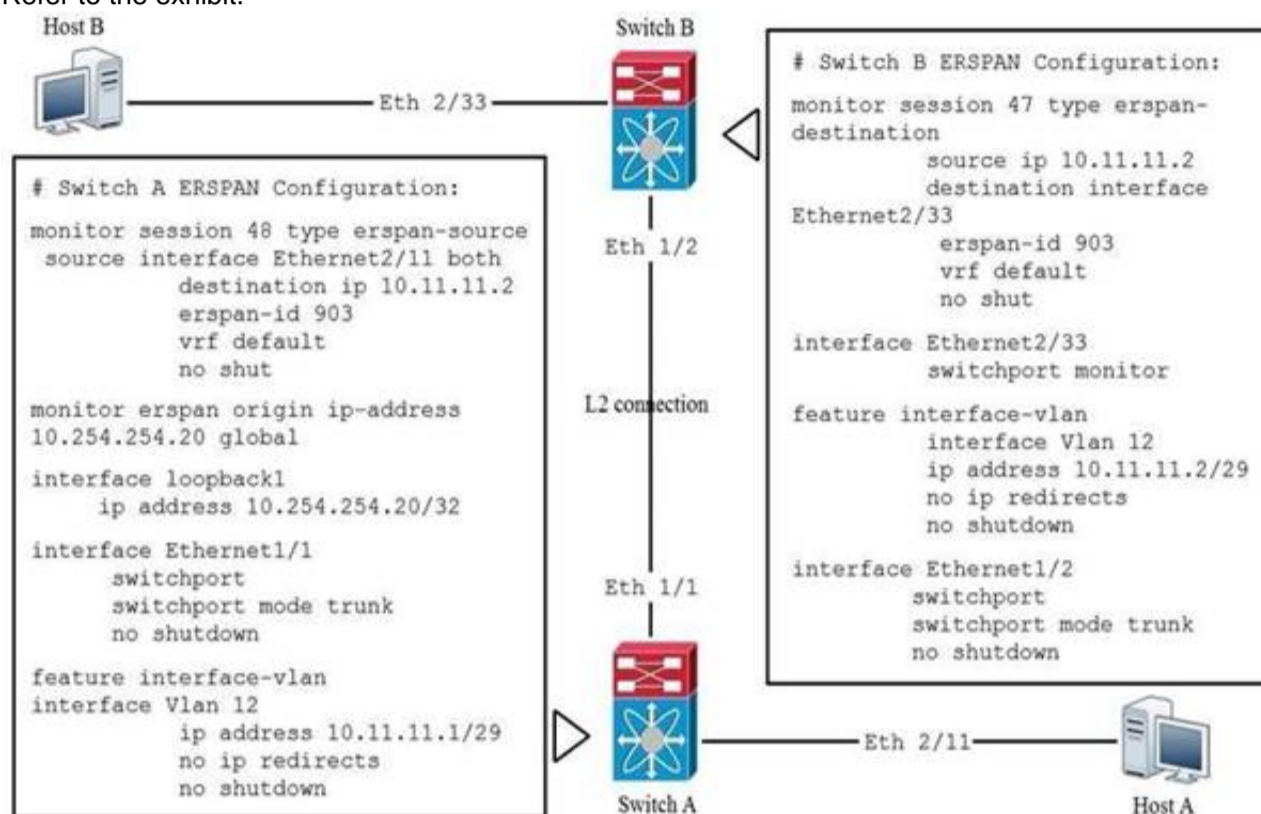

Which statement about the ERSPAN configuration in this environment is true?

- A. The session number of the source of ERSPAN spanned traffic must have a session ID of 47 for the traffic analyzer to receive the traffic.
- B. Host B is the source of ERSPAN spanned traffic and host A is the traffic analyzer.
- C. The session number of the source of ERSPAN spanned traffic must have a session ID of 48 for the traffic analyzer to receive the traffic.
- D. Host A is the source of ERSPAN spanned traffic and host B is the traffic analyzer.

Answer: D

### NEW QUESTION 3

Which mroute state is created when Bidirectional PIM is deployed at a site?

- A. \*.G
- B. MVPN Type-6
- C. MVPN Type-7
- D. S.G

Answer: A

### NEW QUESTION 4

Refer to the exhibit.

```
N7K-1
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.2/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    preempt
    priority 150
    ip 10.16.165.1

vpc domain 100
  role priority 100
  peer-keepalive destination 10.1.1.2 source 10.1.1.1
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize

N7K-2
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.3/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    priority 50
    ip 10.16.165.1

vpc domain 100
  role priority 200
  peer-keepalive destination 10.1.1.1 source 10.1.1.2
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize
```

Which statement about the default gateway configuration of the vPC is true?

- A. Either switch can act as the active default gateway.
- B. N7K-1 acts as the default gateway for all traffic.
- C. N7K-2 forwards traffic that is destined for the default gateway by using the peer link.
- D. N7K-2 acts as the default gateway for all traffic.

**Answer:** A

#### NEW QUESTION 5

Refer to the exhibit.

```
Start time: Mon Apr 15 09:23:01 2019
Last election time: Mon Apr 15 09:24:24 2019
A: UP, PRIMARY
B: UP, SUBORDINATE
A: memb state UP, lead state PRIMARY, mgmt services state: UP
B: memb state UP, lead state SUBORDINATE, mgmt services state: UP
heartbeat state PRIMARY_OK
INTERNAL NETWORK INTERFACES:
eth1, UP
eth2, UP
HA NOT READY
No device connected to this Fabric Interconnect
```

What must be connected to clear the HA NOT READY status?

- A. Layer 1-Layer 2 ports
- B. server chassis
- C. management ports
- D. network uplinks

**Answer:** B

#### NEW QUESTION 6

Which adjacency server configuration makes two OTV edge devices located in the same site bring up the dual- site adjacency?

- A.

Nexus-1:

```
interface Ethernet1/2  
ip address 20.1.1.1/24
```

```
interface Overlay200  
otv use-adjacency-server 20.1.1.2 unicast-only  
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2  
ip address 20.1.1.2/24
```

```
interface Overlay200  
otv use-adjacency-server 20.1.1.1 unicast-only  
otv join-interface Ethernet1/2
```

B. Nexus-1:

```
interface Ethernet1/2  
ip address 20.1.1.1/24
```

```
interface Overlay200  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2  
ip address 20.1.1.2/24
```

```
interface Overlay200  
otv join-interface Ethernet1/2  
otv adjacency-server unicast-only  
otv use-adjacency-server 20.1.1.1 unicast-only
```

C. Nexus-1:

```
interface Ethernet1/2  
ip address 20.1.1.1/24
```

```
interface Overlay200  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2  
ip address 20.1.1.2/24
```

```
intevrface Overlay200  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

D.

Nexus-1:

```
interface Ethernet1/2
ip address 20.1.1.1/24
```

```
interface Overlay200
otv use-adjacency-server 20.1.1.1 unicast-only
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
ip address 20.1.1.2/24
```

```
interface Overlay200
otv use-adjacency-server 20.1.1.2 unicast-only
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

Answer: B

#### NEW QUESTION 7

A customer has a requirement to deploy a cloud service and needs to have full control over the underlying OS, data and applications. Which cloud model meets this requirement?

- A. MaaS
- B. PaaS
- C. SaaS
- D. IaaS

Answer: D

#### NEW QUESTION 8

Refer to the exhibit.

```
restart pim
```

Which result of running the command is true?

- A. Multicast traffic forwarding is suspended.
- B. MRIB is flushed.
- C. The PIM database is deleted.
- D. PIM join messages are suspended.

Answer: C

#### NEW QUESTION 9

What are two capabilities of the Cisco Network Assurance Engine? (Choose two.)

- A. It validates that devices comply with network security policies.
- B. It predicts the impact of changes to the network.
- C. It predicts the network load on a data center.
- D. It ensures that network performance meets an SLA.
- E. It verifies the speed of network packet flows by using telemetry.

Answer: AB

#### NEW QUESTION 10

What is an advantage of streaming telemetry over SNMP?

- A. on-change traps sent to a receiver
- B. periodic push-based subscription messages
- C. periodic polling of the device status
- D. MD5-based authentication on polling

Answer: B

#### NEW QUESTION 10

An engineer is implementing an import operation in Cisco UCS Manager.  
What is the impact of performing this operation?

- A. Information can be modified on the management plane only.
- B. A configuration can be imported from a higher release to a lower release.
- C. An import operation can be scheduled.
- D. Only a configuration file that was exported from the same Cisco UCS Manager can be imported.

**Answer:** A

#### NEW QUESTION 15

What happens to the default host firmware policy after a Cisco UCS Manager upgrade?

- A. It is assigned to all the service profiles that include a host firmware policy.
- B. It is replaced by a new default policy without any firmware entries.
- C. It is set to match the host firmware policy.
- D. It is updated to contain the firmware entries of all the components.

**Answer:** A

#### NEW QUESTION 18

An engineer is duplicating an existing Cisco UCS setup at a new site.

What are two characteristics of a logical configuration backup of a Cisco UCS Manager database? (Choose two.)

- A. contains the configured organizations and locales
- B. contains the VLAN and VSAN configurations
- C. contains the AAA and RBAC configurations
- D. contains all of the configurations
- E. contains a file with an extension tgz that stores all of the configurations

**Answer:** BC

#### NEW QUESTION 23

Which two settings must be configured before enabling a Cisco UCS Manager domain for Cisco Intersight connectivity? (Choose two.)

- A. SMTP servers
- B. SMTP reply-to address
- C. NTP servers
- D. syslog redirection
- E. DNS servers

**Answer:** CE

#### NEW QUESTION 25

Which two hypervisors does Cisco HyperFlex support? (Choose two.)

- A. OpenStack
- B. Citrix XenServer
- C. VMware vSphere
- D. RedHat KVM
- E. Microsoft Hyper-V

**Answer:** CE

#### NEW QUESTION 27

An engineer changed a configuration and must perform a rollback.

Which statement applies to a Cisco Nexus 5600 Series Switch?

- A. The configuration rollback functionality is disabled when FCoE is enabled.
- B. A system checkpoint is generated automatically when the running configuration is saved to NVRAM.
- C. A user who is assigned to the network-operator user role can perform a rollback.
- D. Errors are skipped when an atomic rollback type is triggered.

**Answer:** A

#### NEW QUESTION 28

Which statement about the impact of a rolling EPLD upgrade on a Cisco MDS 9000 Series Switch is true?

- A. The upgrade can be performed from the standby supervisor module.
- B. Only the modules that are being upgraded are disrupted.
- C. All modules on the switch are disrupted.
- D. An EPLD upgrade is nondisruptive.

**Answer:** B

### NEW QUESTION 31

Which two statements about the process at upgrading an EPLD on a Cisco MDS 9000 Series Switch are correct? (Choose two.)

- A. EPLDs can be upgraded only to the latest EPLD image.
- B. EPLD upgrades can be completed without powering down the module during the upgrade.
- C. An upgrade verification identifies the impact of each EPLD upgrade.
- D. The EPLDs for all the modules on a switch must be upgraded at the same time.
- E. EPLDs can be upgraded without replacing the hardware.

Answer: CE

### NEW QUESTION 32

DRAG DROP

An engineer is configuring VNTag between a virtualized server and a Cisco Nexus 5500 Series switch. Drag and drop the configuration steps from the left into the correct order on the right.

Select and Place:

Configure support for VNTag mode on the interface that connects to the server.	Step 1
Configure the vNICs of the server.	Step 2
Configure the server to support NIV mode.	Step 3
Enable the virtualization feature set.	Step 4
Configure the port profile.	Step 5
Install the virtualization feature set.	Step 6

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Configure support for VNTag mode on the interface that connects to the server.	Install the virtualization feature set.
Configure the vNICs of the server.	Enable the virtualization feature set.
Configure the server to support NIV mode.	Configure the port profile.
Enable the virtualization feature set.	Configure support for VNTag mode on the interface that connects to the server.
Configure the port profile.	Configure the vNICs of the server.
Install the virtualization feature set.	Configure the server to support NIV mode.

### NEW QUESTION 33

Refer to the exhibit.

```
CISCO-UCS-A# scope org /
CISCO-UCS-A /org* # create service-profile Cisc01 instance
CISCO-UCS-A /org/service-profile* # set bios-policy bios1
CISCO-UCS-A /org/service-profile* # set boot-policy boot1
CISCO-UCS-A /org/service-profile* # set ext-mgmt-ip-state none
CISCO-UCS-A /org/service-profile* # set host-fw-policy ipmi-user987
CISCO-UCS-A /org/service-profile* # set identity dynamic-uuid derived
CISCO-UCS-A /org/service-profile* # set ipmi-access-profile ipmil
CISCO-UCS-A /org/service-profile* # set local-disk-policy local1
CISCO-UCS-A /org/service-profile* # set maint-policy maint1
CISCO-UCS-A /org/service-profile* # set mgmt-fw-policy mgmt1
CISCO-UCS-A /org/service-profile* # set power-control-policy power1
CISCO-UCS-A /org/service-profile* # set scrub-policy scrub1
CISCO-UCS-A /org/service-profile* # set sol-policy soll
CISCO-UCS-A /org/service-profile* # set stats-policy stats1
CISCO-UCS-A /org/service-profile* # set user-label Cisco
CISCO-UCS-A /org/service-profile* # vcon-policy vconnpolicy
CISCO-UCS-A /org/service-profile* # commit-buffer
CISCO-UCS-A /org/service-profile #
```

What is a characteristic presented in the service profile of the UUID?

- A. unique system generated
- B. allocated from a UUID pool

- C. vendor assigned
- D. based on the hardware

Answer: B

NEW QUESTION 35

Which statement is true about upgrading the firmware on a Cisco MDS storage switch with dual supervisors?

- A. Supervisors can be upgraded independently to test the new firmware.
- B. The new firmware is loaded on the standby supervisor first.
- C. Both supervisors load the new firmware and then the active supervisor reboots.
- D. The standby supervisor must be offline before the firmware upgrade begins.

Answer: B

NEW QUESTION 37

What are two types of FC/FCoE oversubscription ratios? (Choose two.)

- A. switch processing power to end-node processing power
- B. port bandwidth to uplink bandwidth
- C. server storage to end-node count
- D. edge ISL bandwidth to core ISL bandwidth
- E. host bandwidth to storage bandwidth

Answer: DE

NEW QUESTION 39

DRAG DROP

Drag and drop the characteristics from the left onto the correct storage systems on the right.  
Select and Place:

expensive and complex to manage

moderately expensive and simple to configure

most resilient, highly scalable, and high-performance storage

appliance prowling file system access

lacks scalability, performance, and advanced features

NAS

SAN

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

expensive and complex to manage

moderately expensive and simple to configure

most resilient, highly scalable, and high-performance storage

appliance prowling file system access

lacks scalability, performance, and advanced features

NAS

lacks scalability, performance, and advanced features

moderately expensive and simple to configure

appliance prowling file system access

SAN

expensive and complex to manage

most resilient, highly scalable, and high-performance storage

NEW QUESTION 42

An engineer is implementing FCoE.

Which aspect of DCBXP on a Cisco Nexus switch affects this implementation?

- A. It requires that LLDP transmit and LLDP receive are enabled on the FCoE interface.
- B. It uses the Cisco Fabric Services protocol to exchange parameters between two peer links.
- C. It provides the authentication of peers on the Cisco Nexus switch.
- D. It always is enabled on 10/100-Mbps native Ethernet ports.

**Answer:** A

#### NEW QUESTION 47

Which product includes prebuilt templates that can be used to customize fabric deployments?

- A. Cisco Tetration
- B. Cisco Data Center Network Manager
- C. Cisco ACI
- D. Cisco UCS Manager

**Answer:** B

#### NEW QUESTION 52

Which statement about monitoring Fibre Channel traffic on a Cisco UCS 6332 Fabric Interconnect is true?

- A. Fibre Channel traffic can be monitored only on one vHBA per server.
- B. Fibre Channel traffic can be monitored as it is encapsulated as FCoE.
- C. The monitoring of Fibre Channel traffic is limited to the default VSAN.
- D. The destination port for monitoring must be an unassigned Fibre Channel port.

**Answer:** A

#### NEW QUESTION 57

An engineer is implementing NPV mode on a Cisco MDS 9000 Series Switch.  
Which action must be taken?

- A. NPIV must be enabled on the upstream switch.
- B. The FCNS database must be disabled in the fabric.
- C. A port channel must be configured to the upstream switch.
- D. All switches in the fabric must be Cisco MDS switches.

**Answer:** A

#### NEW QUESTION 58

Which two statements about modifying Cisco UCS user accounts are true? (Choose two.)

- A. Disabling a user account maintains all of the data in the Cisco UCS Fabric Interconnect.
- B. The admin account can be used to log on by using SSH only.
- C. The password of the user account must contain a minimum of 10 characters.
- D. Local user accounts override the same account on a remote authentication server, such as TACACS, RADIUS, or LDAP.
- E. The password of the user account expires in 30 days.

**Answer:** AD

#### NEW QUESTION 63

An engineer is converting a Cisco MDS switch to support NPIV mode.  
What should be considered when implementing the solution?

- A. It requires mapping of external interface traffic.
- B. It must be enabled on VSAN 1 only.
- C. It must be enabled globally on all VSANs.
- D. It requires the FLOGI database to be disabled.

**Answer:** C

#### NEW QUESTION 68

DRAG DROP

An engineer must recover configuration on a Cisco MDS 9000 Series switch from a previous version that was backed up to bootflash and then verify the restoration. Drag and drop the commands on the left to the correct order on the right.  
Select and Place:

copy bootflash:<configuration_file> running-config	Step 1
copy running-config startup-config	Step 2
show startup-config	Step 3
write erase	Step 4
reload	Step 5

- A. Mastered  
 B. Not Mastered

**Answer:** A

**Explanation:**

copy bootflash:<configuration_file> running-config	write erase
copy running-config startup-config	reload
show startup-config	copy bootflash:<configuration_file> running-config
write erase	copy running-config startup-config
reload	show startup-config

#### NEW QUESTION 71

Refer to the exhibit.

```
N5K-1 (config)#interface fc2/3
N5K-1 (config-if)#switchport mode sd
N5K-1 (config-if)# no shutdown
```

What is the result of implementing this configuration?

- A. The Fibre Channel interface is configured for SPAN.  
 B. The Fibre Channel interface is configured for source distribution.  
 C. The Fibre Channel interface is configured for FSPF.  
 D. The Fibre Channel interface is configured for synchronization distribution.

**Answer:** A

#### NEW QUESTION 72

Which two methods are available to manage an ACI REST API session authentication when a user is unauthenticated? (Choose two.)

- A. POST to aaaUserLogin  
 B. GET to aaaListDomains  
 C. GET aaaRefresh  
 D. DELETE to aaaLogout  
 E. POST to aaaLogin

**Answer:** CE

#### NEW QUESTION 74

An administrator needs to configure an automated policy to shut down a link when a given threshold is exceeded on MDS switch. Which feature needs to be used?

- A. RMON  
 B. EEM  
 C. Call Home  
 D. Scheduler

Answer: B

#### NEW QUESTION 78

What is an advantage of using Ansible for automation as compared to Puppet and Chef?

- A. Ansible performs automation without installing a software agent on the target node.
- B. Ansible abstracts a scenario so that one set of configuration settings can be used across multiple operating systems.
- C. Ansible automates the enforcement of configuration settings.
- D. Ansible configures a set of CLI commands on a device by using NETCONF.

Answer: A

#### NEW QUESTION 83

A network architect is asked to design and manage geographically distributed data centers across cities and decides to use a Multi-Site Orchestrator deployment. How many orchestrators should be deployed?

- A. 5
- B. 3
- C. 4
- D. 2

Answer: B

#### NEW QUESTION 88

DRAG DROP

A network engineer must implement RBAC on Cisco MDS 9000 Series Multilayer Switches.

Drag and drop the Cisco MDS 9000 Series roles from the left onto the correct categories on the right.

Select and Place:

san-operator	System Defined
global-admin	
server-admin	
storage-admin	
network-admin	User Defined
network-operator	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

san-operator	System Defined
global-admin	
server-admin	
storage-admin	
network-admin	User Defined
network-operator	

### NEW QUESTION 93

What is a feature of NFS?

- A. zone-based access control
- B. Kerberos-based security model
- C. block-based file access
- D. role-based access control

**Answer:** B

### NEW QUESTION 95

Port security is enabled on a Cisco MDS 9000 Series Switch.  
Which statement is true?

- A. Port security can be enabled only globally and affects all VSANs.
- B. Any devices currently logged in must be added manually to the device database.
- C. Auto-learning is always enabled automatically when port security is enabled.
- D. Cisco Fabric Services must be disabled before enabling port security.

**Answer:** C

### NEW QUESTION 96

When a strict CoPP policy is implemented, which statement describes an event during which packets are dropped?

- A. A large system image is copied to a switch by using the default VRF.
- B. Fifteen SSH sessions remain connected to the switch.
- C. A ping sweep is performed on a network that is connected through a switch.
- D. A web server that is connected to a switch is affected by a DDoS attack.

**Answer:** D

### NEW QUESTION 97

DRAG DROP

Drag and drop the storage technologies from the left onto the correct descriptions on the right.  
Select and Place:

NFSv2	uses client machine authentication
Kerberos	uses users authentication
NFSv4	authenticates clients and servers in NFSv4
RADIUS	authenticates clients to corporate directory systems

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

NFSv2	NFSv2
Kerberos	NFSv4
NFSv4	Kerberos
RADIUS	RADIUS

### NEW QUESTION 101

Refer to the exhibit.

```
NEXUS(config)# feature tacacs+
NEXUS(config)# tacacs-server timeout 5
NEXUS(config)# tacacs-server directed-request
NEXUS(config)# tacacs-server deadtime 0
NEXUS(config)# tacacs server host 10.1.50.20 port 49
NEXUS(config)# tacacs-server host 10.1.50.20 key 7 "Flwhg123" timeout 1
NEXUS(config)# aaa group server tacacs+ ISE
NEXUS(config-tacacs+)# server 10.1.50.20
NEXUS(config-tacacs+)# deadtime 10
NEXUS(config-tacacs+)# use-vrf management
NEXUS(config-tacacs+)# source-interface mgmt 0
NEXUS(config)# aaa authentication login default group ISE
```

What is the result of implementing this configuration?

- A. The switch queries the TACACS+ server by using an encrypted text PAP login.
- B. The TACACS+ server uses the type-6 encrypted format.
- C. The switch queries the TACACS+ server by using a clear text PAP login.
- D. The timeout value on the TACACS+ server is 10 seconds.

**Answer: D**

#### NEW QUESTION 105

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 350-601 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 350-601 Product From:

<https://www.2passeasy.com/dumps/350-601/>

## Money Back Guarantee

### 350-601 Practice Exam Features:

- \* 350-601 Questions and Answers Updated Frequently
- \* 350-601 Practice Questions Verified by Expert Senior Certified Staff
- \* 350-601 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 350-601 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year