

NSE7_SDW-7.0 Dumps

Fortinet NSE 7 - SD-WAN 7.0

https://www.certleader.com/NSE7_SDW-7.0-dumps.html



NEW QUESTION 1

What is the route-tag setting in an SD-WAN rule used for?

- A. To indicate the routes for health check probes.
- B. To indicate the destination of a rule based on learned BGP prefixes.
- C. To indicate the routes that can be used for routing SD-WAN traffic.
- D. To indicate the members that can be used to route SD-WAN traffic.

Answer: B

NEW QUESTION 2

Refer to the exhibit, which shows the IPsec phase 1 configuration of a spoke.

```
config vpn ipsec phase1-interface
  edit "T_INET_0_0"
    set interface "port1"
    set ike-version 2
    set keylife 28800
    set peertype any
    set net-device disable
    set proposal aes128-sha256 aes256-sha256 aes128gcm-prfsha256 aes256gcm-prfsha384
chacha20poly1305-prfsha256
    set comments "[created by FMG VPN Manager]"
    set idle-timeout enable
    set idle-timeoutinterval 5
    set auto-discovery-receiver enable
    set remote-gw 100.64.1.1
    set psksecret ENC
6D5rVsaKlMeAyVYt1z95BS24Psew761wY023hnFVviwb6deIt8c5ltCa+iNYhuJt8gycfD4+WuszpmuIv8rRzrVh
7DFkHaW2auAAprQ0dHUFaCzjOhME7mPw+8he2xB7Edb9ku/nZEHb0cKLkKYJc/p9J9IMweV21ZUgFjvIpXNxHxpH
LReOFShoH01SPFKz5IYCVA==
    next
end
```

What must you configure on the IPsec phase 1 configuration for ADVPN to work with SD-WAN?

- A. You must set ike-version to 1.
- B. You must enable net-device.
- C. You must enable auto-discovery-sender.
- D. You must disable idle-timeout.

Answer: B

NEW QUESTION 3

Refer to the exhibit.

```
# get router info routing-table all
...
B      10.0.2.0/24 [200/0] via 10.201.1.2 [3] (recursive via VPN0 tunnel 100.64.1.1), 00:00:54
          [200/0] via 10.202.1.2 [3] (recursive via VPN1 tunnel 100.64.1.9), 00:00:54
          [200/0] via 10.203.1.1 [3] (recursive via VPN2 tunnel 172.16.1.5), 00:00:54
...
```

The device exchanges routes using IBGP.

Which two statements are correct about the IBGP configuration and routing information on the device? (Choose two.)

- A. Each BGP route is three hops away from the destination.
- B. ibgp-multipath is disabled.
- C. additional-path is enabled.
- D. You can run the get router info routing-table database command to display the additional paths.

Answer: CD

NEW QUESTION 4

Refer to the exhibit.

```
config vpn ipsec phase1-interface
  edit "T_INET_0_0"
    set type dynamic
    set interface "port1"
    set keylife 28800
    set peertype any
    set net-device disable
    set proposal aes128-sha256
    set add-route enable
    set psksecret ENC
Zv9n4Urfk0W4jj8vWI+KywxBG4ZDT7jWHKd8YaL8j4+pRpY0x/N7mSgc7VL0BW2ZHQUXWJ6zvFxNKktiPYNtA8aP
i6ly7gDx2lP/OfKexTQQJzgCGRYzLM8eFTOnK7K6AuX0bFDCpBBhEIdf+03CYBMLwkFZmdU6RsT+qvybb1VX+Ioy
HK5EXakpmz5RiltELqZ9Gg==
    next
end
```

Which configuration change is required if the responder FortiGate uses a dynamic routing protocol to exchange routes over IPsec?

- A. type must be set to static.

- B. mode-cfg must be enabled.
- C. exchange-interface-ip must be enabled.
- D. add-route must be disabled.

Answer: D

Explanation:

for using "non ike" routes (for example BGP/static and so on) you must do disable the add-route that inject automatically kernel route based on p2 selectors from the remote site from the SD-WAN_7.2_Study_Guide page 236

NEW QUESTION 5

Which CLI command do you use to perform real-time troubleshooting for ADVPN negotiation?

- A. get router info routing-table all
- B. diagnose debug application ike
- C. diagnose vpn tunnel list
- D. get ipsec tunnel list

Answer: B

NEW QUESTION 6

Refer to the exhibits.

Exhibit A

Edit Traffic Shaping Policy	
IP Version	<div>IPv4 IPv6</div>
Name	Limit_YouTube
Status	<div>Enable Disable</div>
Comments	<div></div> <div>0/255</div>
If Traffic Matches:	
Source Internet Service	<div></div>
Source Address	<div>LAN-net</div>
Source User	<div>+</div>
Source User Group	<div>+</div>
Destination Internet Service	<div></div>
Destination Address	<div>all</div>
Schedule	<div>+</div>
Service	<div>ALL</div>
Application	<div>YouTube</div>
Application Category	<div>+</div>
Application Group	<div>+</div>
URL Category	<div>+</div>
Type Of Service	<div>0x00</div>
Type Of Service Mask	<div>0x00</div>
Then:	
Action	<div>Apply Shaper Assign Group</div>
Outgoing Interface	<div>underlay</div>
Shared Shaper	<div>low-priority</div>
Reverse Shaper	<div>low-priority</div>
Per-IP Shaper	<div>+</div>
Differentiated Services	<div></div>
Differentiated Services Reverse	<div></div>

Exhibit B

The screenshot displays the FortiGate configuration interface for a Firewall Policy and its associated Traffic Shaping Options.

Edit Firewall Policy:

- ID:** 1
- Name:** DIA
- ZTNA:** Disable, Full ZTNA, IP/MAC filtering
- Incoming Interface:** LAN
- Outgoing Interface:** underlay
- Source Internet Service:** (empty)
- IPv4 Source Address:** LAN-net
- IPv6 Source Address:** (+)
- Source User:** (+)
- Source User Group:** (+)
- FSSO Groups:** (+)
- Destination Internet Service:** (empty)
- IPv4 Destination Address:** all
- IPv6 Destination Address:** (+)
- Service:** ALL
- Schedule:** always
- Action:** Deny, Accept, IPSEC
- Inspection Mode:** Flow-based, Proxy-based
- Firewall/Network Options:**
 - NAT:** (checked), NAT, NAT46, NAT64
 - IP Pool Configuration:** Use Outgoing Interface Address, Use Dynamic IP Pool
 - Preserve Source Port:** (unchecked)
 - Protocol Options:** default

Disclaimer Options:

- Display Disclaimer:** (unchecked)
- Security Profiles:** (unchecked)
- SSL/SSH Inspection:** deep-inspection
- Decrypted Traffic Mirror:** (+)
- Traffic Shaping Options:**
 - Shared Shaper:** (+)
 - Reverse Shaper:** (+)
 - Per-IP Shaper:** (+)
- Logging Options:**
 - Log Allowed Traffic:** No Log, Log Security Events, Log All Sessions
 - Capture Packets:** (unchecked)
 - Generate Logs when Session Starts:** (unchecked)

Exhibit A shows the traffic shaping policy and exhibit B shows the firewall policy.

The administrator wants FortiGate to limit the bandwidth used by YouTube. When testing, the administrator determines that FortiGate does not apply traffic shaping on YouTube traffic.

Based on the policies shown in the exhibits, what configuration change must be made so FortiGate performs traffic shaping on YouTube traffic?

- A. Destination internet service must be enabled on the traffic shaping policy.
- B. Application control must be enabled on the firewall policy.
- C. Web filtering must be enabled on the firewall policy.
- D. Individual SD-WAN members must be selected as the outgoing interface on the traffic shaping policy.

Answer: B

NEW QUESTION 7

What are two reasons why FortiGate would be unable to complete the zero-touch provisioning process? (Choose two.)

- A. The FortiGate cloud key has not been added to the FortiGate cloud portal.
- B. FortiDeploy has connected with FortiGate and provided the initial configuration to contact FortiManager
- C. The zero-touch provisioning process has completed internally, behind FortiGate.
- D. FortiGate has obtained a configuration from the platform template in FortiGate cloud.
- E. A factory reset performed on FortiGate.

Answer: AC

NEW QUESTION 8

Which two protocols in the IPsec suite are most used for authentication and encryption? (Choose two.)

- A. Encapsulating Security Payload (ESP)
- B. Secure Shell (SSH)
- C. Internet Key Exchange (IKE)
- D. Security Association (SA)

Answer: AC

NEW QUESTION 9

Which two settings can you configure to speed up routing convergence in BGP? (Choose two.)

- A. update-source
- B. set-route-tag
- C. holdtime-timer
- D. link-down-failover

Answer: CD

NEW QUESTION 10

Refer to the exhibits.
Exhibit A

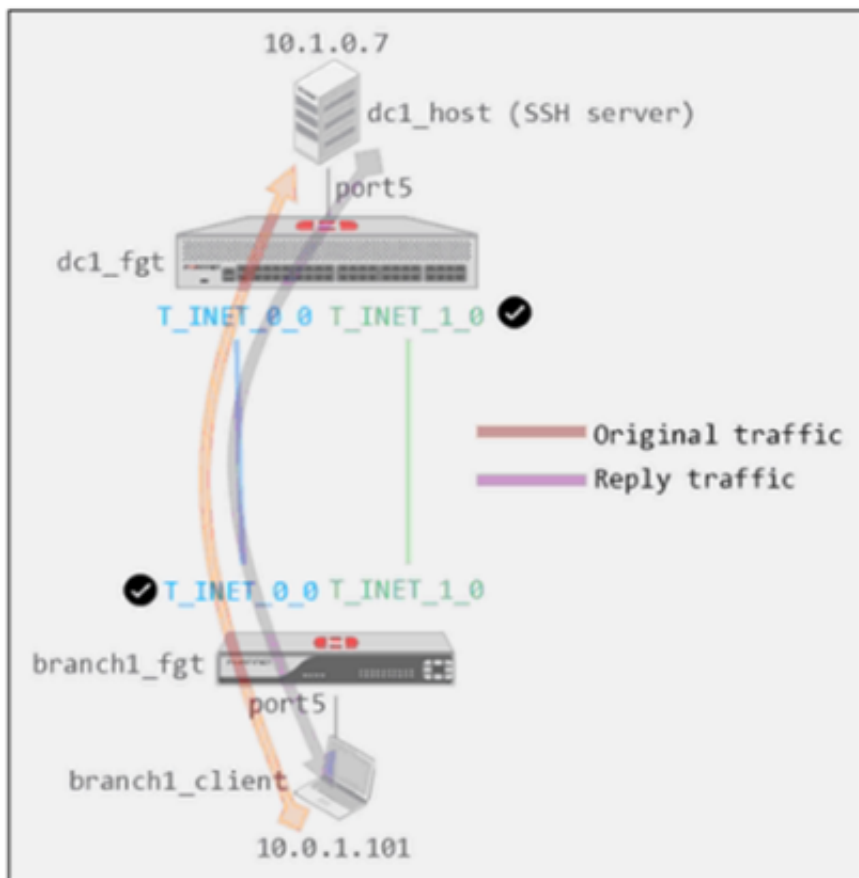


Exhibit B

```
dc1_fgt # show system global
config system global
    set admin-https-redirect disable
    set admintimeout 480
    set alias "FortiGate-VM64"
    set hostname "dc1_fgt"
    set timezone 04
end

dc1_fgt # show system settings
config system settings
    set tcp-session-without-syn enable
    set allow-subnet-overlap enable
    set gui-allow-unnamed-policy enable
    set gui-multiple-interface-policy enable
end
```

Exhibit A shows a site-to-site topology between two FortiGate devices: branch1_fgt and dc1_fgt. Exhibit B shows the system global and system settings configuration on dc1_fgt.

When branch1_client establishes a connection to dc1_host, the administrator observes that, on dc1_fgt, the reply traffic is routed over T_INET_0_0, even though T_INET_1_0 is the preferred member in the matching SD-WAN rule.

Based on the information shown in the exhibits, what configuration change must be made on dc1_fgt so dc1_fgt routes the reply traffic over T_INET_1_0?

- A. Enable auxiliary-session under config system settings.
- B. Disable tp-session-without-syn under config system settings.
- C. Enable snat-route-change under config system global.
- D. Disable allow-subnet-overlap under config system settings.

Answer: A

Explanation:

Controlling return path with auxiliary session When multiple incoming or outgoing interfaces are used in ECMP or for load balancing, changes to routing, incoming, or return traffic interfaces impacts how an existing sessions handles the traffic. Auxiliary sessions can be used to handle these changes to traffic patterns.<https://docs.fortinet.com/document/fortigate/7.0.11/administration-guide/14295/controlling-return-path>

NEW QUESTION 10

Refer to the exhibit.


```
branch1_fgt # diagnose sys sdwan service 1

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
Gen(6), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(manual)
Members(2):
  1: Seq_num(3 T_INET_0_0), alive, selected
  2: Seq_num(4 T_INET_1_0), alive, selected
Src address(1):
  10.0.1.0-10.0.1.255

Dst address(1):
  10.0.0.0-10.255.255.255

branch1_fgt # diagnose sys sdwan member | grep T_INET_
Member(3): interface: T_INET_0_0, flags=0x4 , gateway: 100.64.1.1, priority: 10 1024,
weight: 0
Member(4): interface: T_INET_1_0, flags=0x4 , gateway: 100.64.1.9, priority: 0 1024,
weight: 0

branch1_fgt # get router info routing-table all | grep T_INET_
S      10.0.0.0/8 [1/0] via T_INET_1_0 tunnel 100.64.1.9
```

An administrator is troubleshooting SD-WAN on FortiGate. A device behind branch1_fgt generates traffic to the 10.0.0.0/8 network. The administrator expects the traffic to match SD-WAN rule ID 1 and be routed over T_INET_0_0. However, the traffic is routed over T_INET_1_0. Based on the output shown in the exhibit, which two reasons can cause the observed behavior? (Choose two.)

- A. The traffic matches a regular policy route configured with T_INET_1_0 as the outgoing device.
- B. T_INET_1_0 has a lower route priority value (higher priority) than T_INET_0_0.
- C. T_INET_0_0 does not have a valid route to the destination.
- D. T_INET_1_0 has a higher member configuration priority than T_INET_0_0.

Answer: AC

NEW QUESTION 14

Which are three key routing principles in SD-WAN? (Choose three.)

- A. FortiGate performs route lookups for new sessions only.
- B. Regular policy routes have precedence over SD-WAN rules.
- C. SD-WAN rules have precedence over ISDB routes.
- D. By default, SD-WAN members are skipped if they do not have a valid route to the destination.
- E. By default, SD-WAN rules are skipped if the best route to the destination is not an SD-WAN member.

Answer: BDE

NEW QUESTION 17

In a hub-and-spoke topology, what are two advantages of enabling ADVPN on the IPsec overlays? (Choose two.)

- A. It provides the benefits of a full-mesh topology in a hub-and-spoke network.
- B. It provides direct connectivity between spokes by creating shortcuts.
- C. It enables spokes to bypass the hub during shortcut negotiation.
- D. It enables spokes to establish shortcuts to third-party gateways.

Answer: AB

NEW QUESTION 22

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your NSE7_SDW-7.0 Exam with Our Prep Materials Via below:

https://www.certleader.com/NSE7_SDW-7.0-dumps.html