

F5-Networks

Exam Questions 201

TMOS Administration



NEW QUESTION 1

A BIG-IP Administrator explicitly creates a traffic group on a BIG-IP device.

Which two types of configuration objects can be associated with this traffic group? (Choose two.)

- A. Pool Members
- B. Virtual Addresses
- C. iRules
- D. VLANS
- E. Application Instances

Answer: BE

NEW QUESTION 2

A BIG-IP Administrator configures a Virtual Server to load balance traffic between 50 web servers for an ecommerce website. Traffic is being load balanced using the Least Connections (node) method.

The web server administrators report that customers are losing the contents from their shopping carts and are unable to complete their orders. What should the BIG-IP Administrator do to resolve the issue?

- A. Change Default Persistence Profile setting to cookie
- B. Change Load Balancing method to Ratio (member)
- C. Change Default Persistence Profile setting to sipjinfo
- D. Change Load Balancing method to Ratio (node)

Answer: A

NEW QUESTION 3

Some users who connect to a busy Virtual Server have connections reset by the BIG-IP system. Pool member resources are NOT a factor in this behavior. What is a possible cause for this behavior?

- A. The Connection Rate Limit is set too high
- B. The server SSL Profile has NOT been reconfigured.
- C. The Connection Limit is set too low.
- D. The Rewrite Profile has NOT been configured.

Answer: C

Explanation:

The topic explains that the connection reset behavior is caused by the vs configuration rather than the server resource problem. The answers B C are all configuration at the service forwarding level. If there is a problem with the configuration, it is all a problem rather than some users. Answer C's Connection Limit will cause a reset behavior when the connection reaches the threshold.

NEW QUESTION 4

A BIG-IP Administrator receives an RMA replacement for a failed F5 device. The BIG-IP Administrator tries to restore a UCS taken from the previous device, but the restore fails. The following error appears in the /var/log/itm.

mcpd [****J: *****»;0; License is not operational (expired or digital signature does not match contents.)


What should the BIG-IP Administrator do to avoid this error?

- A. Use the appropriate tmsh command with the no-license option
- B. Revoke the license prior to restoring
- C. Reactivate the license on the new device using the manual activation method
- D. Remove the license information from the UCS archive

Answer: A

NEW QUESTION 5

Refer to the exhibit.

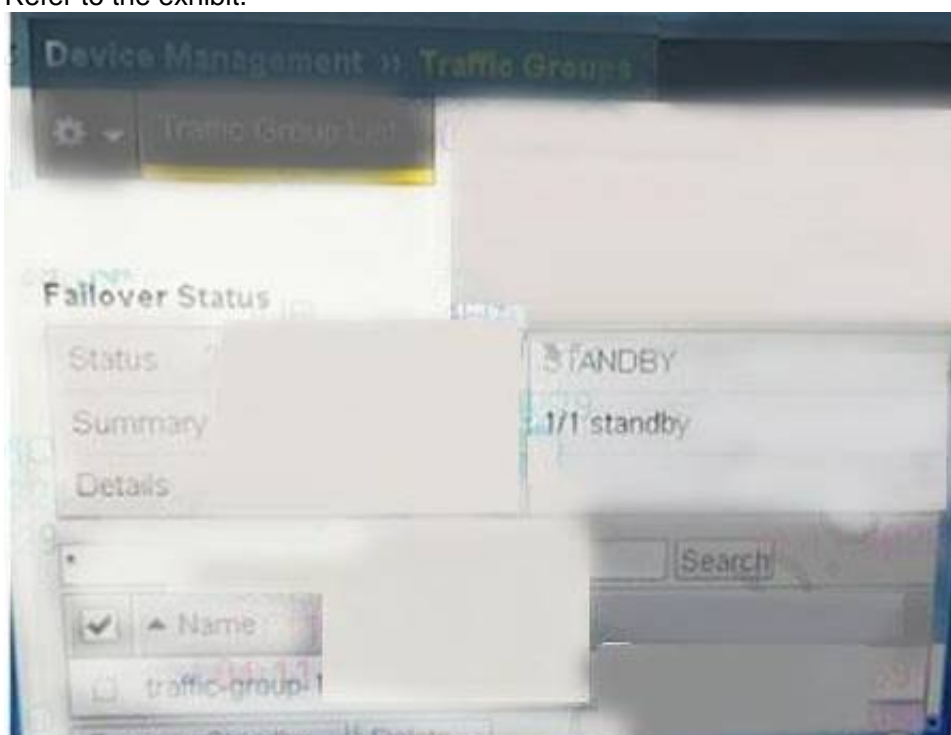

A BIG-IP Administrator needs to fail over the active device. The administrator logs into the Configuration Utility and navigates to Device Management > Traffic Group. However, Force to Standby is greyed out. What is causing this issue?

- A. The BIG-IP Administrator is NOT logged into command line to fail over
- B. The BIG-IP Administrator is on the Standby Device
- C. The BIG-IP Administrator is logged in as root
- D. The BIG-IP Administrator is logged in as administrator

Answer: B

NEW QUESTION 6

What should the BIG-IP Administrator do to apply and activate a hotfix to a BIG-IP device that is currently running version 11.0.0 on active partition HD1.1?

- A. * 1. confirm that 11.0.0 is installed on inactive partition HD1.2* 2. apply a hotfix to partition HD 1.2* 3. activate partition HD1.2
- B. * 1. reactivate the license on partition HD1.1* 2. apply a hotfix to partition HD1.1
- C. * 1. activate partition HD1.2* 2 confirm version 11.0.0 on partition HD1.2* 3. install a hotfix on partition HD1.2
- D. * 1. set partition HD1.2 active* 2. apply a hotfix to partition HD1.2

Answer: A

NEW QUESTION 7

When configuring a pool member's monitor, which three association options are available? (Choose three.)

- A. inherit the pool's monitor
- B. inherit the node's monitor
- C. configure a default monitor
- D. assign a monitor to the specific member
- E. do not assign any monitor to the specific member

Answer: ADE

NEW QUESTION 8

A site is load balancing to a pool of web servers. Which statement is true concerning BIG IP's ability to verify whether the web servers are functioning properly or not?

- A. Web server monitors can test the content of any page on the server.
- B. Web server monitors always verify the contents of the index.html page.
- C. Web server monitors can test whether the server's address is reachable, but cannot test a page's content.
- D. Web server monitors can test the content of static web pages, but cannot test pages that would require the web server to dynamically build content.

Answer: A

NEW QUESTION 9

Which Virtual Server type prevents the use of a default pool?

- A. Performance (Layer 4)
- B. Forwarding (IP)
- C. Performance HTTP
- D. Standard

Answer: B

Explanation:

Forwarding (IP) cannot be associated with the pool.

NEW QUESTION 10

A BIG-IP Administrator suspects that one of the BIG-IP device power supplies is experiencing power outages. Which log file should the BIG-IP Administrator check to verify the suspicion?

- A. /var/log/daemon.log
- B. /var/log/kern.log
- C. /var/log/ltn
- D. /var/log/audit

Answer: C

NEW QUESTION 10

Which file should the BIG-IP Administrator check to determine when a Virtual Server changed its status

- A. /var/log/audit
- B. /var/log/lastlog
- C. /var/log/tm
- D. /var/log/monitors

Answer: C

NEW QUESTION 14

A BIG-IP Administrator runs the initial configuration wizard and learns that the NTP servers were invalid. In which area of the Configuration Utility should the BIG-IP Administrator update the list of configured NTP servers?

- A. System > Configuration
- B. System > Services
- C. System > Preferences
- D. System > Platform

Answer: A

NEW QUESTION 15

Refer to the exhibit.

During a planned upgrade to a BIG-IP HA pair running Active/Standby, an outage to application traffic is reported shortly after the Active unit is forced to Standby. Reverting the failover resolves the outage. What should the BIG-IP Administrator modify to avoid an outage during the next failover event?

- A. The Tag value on the Standby device
- B. The interface on the Active device to 1.1
- C. The Tag value on the Active device
- D. The Interface on the Standby device to 1.1

Answer: A

NEW QUESTION 17

A BIG-IP Administrator is informed that traffic on Interface 1.1 is expected to increase over the maximum bandwidth capacity on the link. There is a single VLAN on the Interface. What should the BIG-IP Administrator do to increase the total available bandwidth?

- A. Assign two Interfaces to the VLAN
- B. Set the media speed of Interface 1.1 manually
- C. Create a trunk object with two Interfaces
- D. Increase the MTU on the VLAN using Interface 1.1

Answer: C

NEW QUESTION 18

A BIG-IP Administrator needs to purchase new licenses for a BIG-IP appliance.

The administrator needs to know if a module is licensed and the memory requirement for that module. Where should the administrator view this information in the System menu?

- A. Resource Provisioning
- B. Configuration > Device
- C. Software Management
- D. Configuration > OVSDB

Answer: A

NEW QUESTION 19

Which statement is true concerning iRule events?

- A. All iRule events relate to HTTP processes.
- B. All client traffic has data that could be used to trigger iRule events.
- C. All iRule events are appropriate at any point in the clientserver communication.
- D. If an iRule references an event that doesn't occur during the client's communication, the client's connection will be terminated prematurely.

Answer: B

NEW QUESTION 23

A BIG-IP Administrator is conducting maintenance on one BIG-IP appliance in an HA Pair. Why should the BIG-IP Administrator put the appliance into FORCED_OFFLINE state?

- A. To preserve existing connections to Virtual Servers and reduce the CPU load
- B. To allow new connections to Virtual Servers and ensure the appliance becomes active
- C. To terminate connections to the management IP and decrease persistent connections
- D. To terminate existing connections to Virtual Servers and prevent the appliance from becoming active

Answer: D

NEW QUESTION 25

The BIG-IP Administrator generates a qkview using "qkview -SO" and needs to transfer the output file via SCP.

Which directory contains the output file?


- A. /var/log
- B. /var/tmp
- C. /var/local
- D. /var/config

Answer:

B

NEW QUESTION 29

Refer to the exhibit.

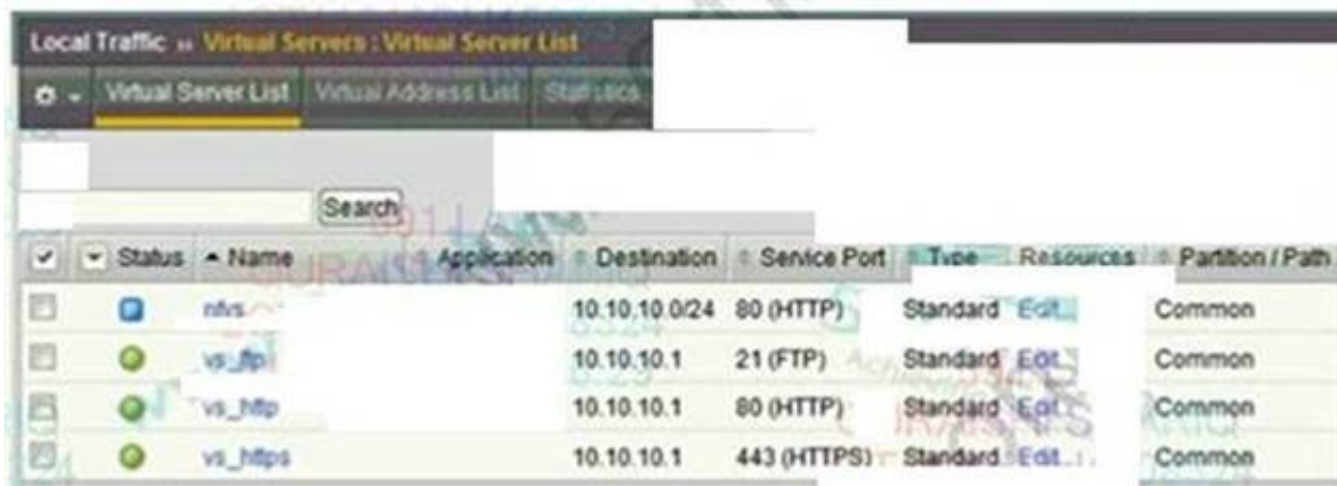

Status	Name	Application	Destination	Service Port	Type	Resources	Partition / Path
	nvfs		10.10.10.0/24	80 (HTTP)	Standard	Edit	Common
	vs_ftp		10.10.10.1	21 (FTP)	Standard	Edit	Common
	vs_http		10.10.10.1	80 (HTTP)	Standard	Edit	Common
	vs_https		10.10.10.1	443 (HTTPS)	Standard	Edit	Common

A user attempts to connect to 10.10.10.1.80 using FTP over SSL with an FTPS client. Which virtual server will match and attempt to process the request?

- A. vsjutps
- B. vs_ftp
- C. vs_http
- D. nvfs

Answer: B

NEW QUESTION 31

A BIG-IP Administrator is unable to connect to the management interface via HTTPS. What is a possible reason for this issue?

- A. The port lockdown setting is configured to Allow None.
- B. An incorrect management route is specified.
- C. The IP address of the device used to access the management interface is NOT included in the "P Allow" list in the Configuration Utility.
- D. The IP address of the device used to access the management interface is NOT included in the "httpd Allow" list in the CLI.

Answer: D

NEW QUESTION 33

To increase available bandwidth of an existing Trunk, the BIG-IP Administrator is adding additional interfaces. Which command should the BIG-IP Administrator run from within bosh shell?

- A. tmsh create /net trunk trunk_A interfaces add {1.3.1.4}
- B. tmsh create/sys trunk trunk_A interfaces add {1.3.1.4}
- C. tmsh modify/sys trunk trunk^A interfaces add {1.3.1.4}
- D. tmsh modify /net trunk trunk_A interfaces add {1.3.1.4}

Answer: D

NEW QUESTION 36

A BIG-IP device is configured with both an internal external and two Corporate VLANs. The virtual server has SNAT enabled and is set to listen on all VLANs Auto Last Hop is disabled. The Corporate users are on 10.0.0.0/24 and 172.16.0.0/12. The BIG-IP has a Self-IP on the 1.0.0.0.0/24 subnet. Internet users are able to access the virtual server. Only some of the Corporate users are able to connect to the virtual server A BIG-IP Administrator performs a tcpdump on the BIG-IP and verifies that traffic is arriving from users in 10.0.0.0/24. What should the BIG-IP Administrator do to correct this behaviour?

- A. Disable the server on the internal VLAN
- B. Add a static route for the 172.16.0.0/12 subnet
- C. Change the default route to point to the extra firewall
- D. Modify the default route of the servers to point to the BIG-IP device

Answer: B

NEW QUESTION 37

A BIG-IP Administrator recently deployed an application Users are experiencing slow performance with the application on some remote networks. Which two modifications can the BIG-IP Administrator make to address this issue? (Choose two)

- A. Apply dest_addr profile to the Virtual Server
- B. Apply f5-tcp-wan profile to the Virtual Server
- C. Apply f5-tcp-lan profile to the Virtual Server
- D. Apply source_addr profile to the Virtual Server
- E. Apply fasti_4 profile to the Virtual Server

Answer: BC

NEW QUESTION 42

A VLAN has the following objects configured:

Self-IP 10.10.10.100 with port lockdown set to Allow default Virtual server 10.10.10.100:443 with UDP profile enabled Virtual server 10.10.10.0/24 port forwarding virtual server

Global destination NAT forwarding 10.10.10.100 to internal server 172.168.10.100

Which object will process this request when https://10.10.10.100 is entered into a browser?

- A. self-IP 10.10.10.100 with port lockdown set to Allow default
- B. virtual server 10.10.100/24 port o forwarding virtual server
- C. global destination NAT forwarding 10.10.10.100 to internal server 172.168.10.100
- D. virtual server 10.10.10.100.443 with UDP profile enabled

Answer: A

NEW QUESTION 46

The current status of a given pool is offline (red). Which condition could explain that state? Assume the descriptions below include all monitors assigned for each scenario.

- A. No monitors are currently assigned to any pool, member or node.
- B. The pool has a monitor assigned to it, and none of the pool members passed the test.
- C. The pool has a monitor assigned to it, and only some of the pool's members passed the test.
- D. A monitor is assigned to all nodes and all nodes have passed the tes
- E. The pool's members have no specific monitor assigned to them.

Answer: B

NEW QUESTION 48

When network failover is enabled, which of the following is true?

- A. The failover cable status is ignore
- B. Failover is determined by the network status only.
- C. Either a network failure or loss of voltage across the failover cable will cause a failover.
- D. A network failure will not cause a failover as long as there is a voltage across the failover cable.
- E. The presence or absence of voltage over the fail over cable takes precedence over network failover.

Answer: C

NEW QUESTION 53

A site has assigned the ICMP monitor to all nodes and a custom monitor, based on the HTTP template, to a pool of web servers. The HTTP based monitor is working in all cases. The ICMP monitor is failing for 2 of the pool member 5 nodes. All other settings are default. What is the status of the monitor is working in all cases?

- A. All pool members are up since the HTTPbased monitor is successful.
- B. All pool members are down since the ICMPbased monitor is failing in some cases.
- C. The pool members whose nodes are failing the ICMPbased monitor will be marked disabled.
- D. The pool members whose nodes are failing the ICMPbased monitor will be marked unavailable.

Answer: D

NEW QUESTION 58

The BIG-IP Administrator creates a custom iRule that fails to work as expected. Which F5 online resource should the administrator use to help resolve this issue?

- A. DevCentral
- B. Bug Tracker
- C. University
- D. Health

Answer: A

NEW QUESTION 62

Which statement is true concerning cookie persistence?

- A. Cookie persistence allows persistence independent of IP addresses.
- B. Cookie persistence allows persistence even if the data are encrypted from client to pool member.
- C. Cookie persistence uses a cookie that stores the virtual server, pool name, and member IP address in clear text.
- D. If a client's browser accepts cookies, cookie persistence will always cause a cookie to be written to the client's file system.

Answer: A

NEW QUESTION 64

An application is configured so that the same pool member must be used for an entire session, as well as for HTTP and FTP traffic.

A user reports that a session has terminated, and the user must restart the session. The BIG-IP Administrator determines that the active BIG-IP device failed over to the standby BIG-IP device. Which configuration settings should the BIG-IP Administrator verify to ensure proper behaviour when BIG-IP failover occurs?

- A. cookie persistence and session timeout
- B. Stateful failover and Network Failover detection
- C. Persistence mirroring and Match Across Services
- D. syn-cookie insertion threshold and connection low-water mark

Answer: C

NEW QUESTION 65

A BIG-IP Administrator needs to restore an encrypted UCS archive from the command line using the TMSH utility. Which TMSH command should the BIG-IP Administrator use to accomplish this?

- A. load/sys ucs <filepath> passphrase <password>
- B. load/sys config file <filepath> passphrase <password>
- C. load/sys config file <filepath>
- D. load/sys ucs <filepath> no-license

Answer: A

NEW QUESTION 66


A web server administrator informs the BIG-IP Administrator that web servers are overloaded Starting next month, the BIG-IP device will terminate SSL to reduce web server load. The BIG-IP device is ready using client SSL client profile and Rules on HTTP level. What actions should the BIG-IP Administrators to achieve the desired configuration?

- A. Remove the server SSL profile and configure the Pool Members to use HTTP
- B. Remove the client SSL profile and configure the Pool Members to US HTTP
- C. Remove the chart SSL profile and change the Virtual Server to accept HTTP
- D. Remove the server SSL profile and change the Virtual Server to accept HTTP traffic

Answer: A

NEW QUESTION 71

Refer to the exhibit.

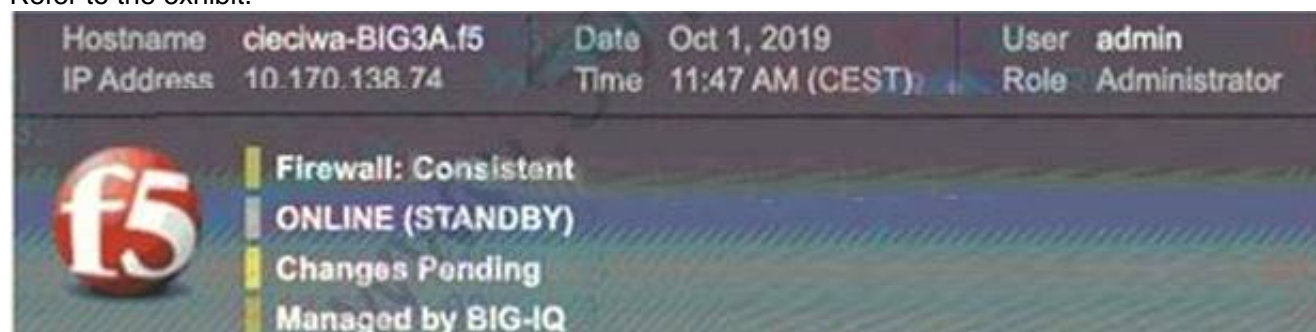

The BIG-IP Administrator has modified an iRule on one device of an HA pair. The BIG-IP Administrator notices there is NO traffic on the BIG-IP device in which they are logged into.

What should the BIG-IP Administrator do to verify if the iRule works correctly?

- A. Push configuration from this device to the group and start to monitor traffic on this device
- B. Pull configuration to this device to the cluster and start to monitor traffic on this device
- C. Log in to the other device in the cluster, push configuration from it, and start to monitor traffic on that device
- D. Log in to the other device in the cluster, pull configuration to it, and start to monitor traffic on that device

Answer: D

Explanation:

The device in the picture is a standby machine, of course there is no traffic, you need to log in to the host, and then pull the configuration to the host.

NEW QUESTION 72

Assuming that systems are synchronized, which action could take place if the fail over cable is connected correctly and working properly, but the systems cannot communicate over the network due to external network problems?

- A. If network failover is enabled, the standby system will assume the active mode.
- B. Whether or not network failover is enabled, the standby system will stay in standby mode.
- C. Whether or not network failover is enabled, the standby system will assume the active mode.
- D. If network failover is enabled, the standby system will go into active mode but only until the network recovers.

Answer: B

NEW QUESTION 74

Which two can be a part of a pool's definition? (Choose two.)

- A. rule(s)
- B. profile(s)
- C. monitor(s)
- D. persistence type
- E. loadbalancing mode

Answer: CE

NEW QUESTION 78

A BIG-IP Administrator wants to add the ASM Module to an HA pair of BIG-IP devices. The BIG-IP Administrator has already installed a new Add-On License on both devices in the HA pair. What should the BIG-IP Administrator do next to use the module?

- A. Provision the new module on both BIG-IP device's
- B. Synchronize both BIG-IP devices
- C. Reboot both BIG-IP devices
- D. Reactivate the Licenses on both BIG IP devices

Answer: A

NEW QUESTION 80

A pool of four servers has been partially upgraded for two new servers with more memory and CPU capacity. The BIG-IP Administrator must change the load balance method to consider more connections for the two new servers. Which load balancing method considers pool member CPU and memory load?

- A. Round Robin
- B. Dynamic Ratio
- C. Ratio
- D. Least Connection

Answer: C

NEW QUESTION 83

You have a pool of servers that need to be tested. All of the servers but one should be tested every 10 seconds, but one is slower and should only be tested every 20 seconds. How do you proceed?

- A. It cannot be don
- B. All monitors test every five seconds.
- C. It can be done, but will require assigning monitors to each pool member.
- D. It cannot be don
- E. All of the members of a pool must be tested at the same frequency.
- F. It can be done by assigning one monitor to the pool and a different monitor to the slower pool member.

Answer: D

NEW QUESTION 86

A BIG-IP Administrator makes a configuration change to the BIG-IP device. Which file logs the message regarding the configuration change?

- A. /var/log/messages
- B. /var/log/audit
- C. /var/log/user.log
- D. /var/log/secure

Answer: B

Explanation:

About audit logging

Audit logging is an optional feature that togs messages whenever a BIG-IP® system object, such as a virtual server or a load balancing pool, is confined (that is. created, modified, or deleted). The BiGIP system logs the messages for these auditing events in the file /var/log'audit

There are three ways that objects can be configured

- By user action
- By system action
- By loading configuration data

Whenever an object is configured in one of these ways, the BIG-IP system logs a message to the audit log

NEW QUESTION 87

A BIG-IP Administrator is checking the BIG-IP device for known vulnerabilities. What should the 8IG-IP Administrator upload to BIG-IP iHealth for further analysis?

- A. QKView
- B. EUD
- C. UCS
- D. tcpdump

Answer: A

NEW QUESTION 90

A BIG-IP Administrator configures a Virtual Server. Users report that they always receive a TCP RST packet to the BIG-IP system when attempting to connect to it. What is the possible reason for this issue?

- A. The virtual server Type is set to Internal
- B. The virtual server Type is set to Reject
- C. The virtual server Type is set to Drop
- D. The virtual server Type is set to Stateless

Answer: B

NEW QUESTION 91

Refer to the exhibit.



A pool member fails the monitor checks for about 30 minutes and then starts passing the monitor checks. New traffic is Not being sent to the pool member. What is the likely reason for this problem?

- A. The pool member is disabled
- B. Monitor Type is TCP Half Open
- C. Manual resume is enabled
- D. Time Until Up is zero

Answer: C

NEW QUESTION 96

A site needs a virtual server that will use an iRule to parse HTTPS traffic based on HTTP header values. Which two profile types must be associated with such a virtual server? (Choose two.)

- A. TCP
- B. HTTP
- C. HTTPS
- D. ServerSSL

Answer: AB

NEW QUESTION 101

A BIG-IP Administrator reviews the Plane CPU Usage performance chart and discovers a high percentage of Control Plane utilization. Which type of traffic does this indicate a higher usage of?

- A. Administrative
- B. Tunnel
- C. Accelerated ,
- D. Application

Answer: A

NEW QUESTION 104

A BIG-IP Administrator needs to make sure that the automatic update check feature works properly. What must the administrator configure on the BIG-IP system?

- A. Update Check Schedule
- B. NTP servers
- C. DNS name servers
- D. SMTP servers

Answer: A

NEW QUESTION 107

Refer to the exhibit

The BIG-IP Administrator is unable to access the management console via Self-IP 10.10 1.33 and port 443. What is the reason for this problem?

- A. Packet Filter needs to be configured to allow a source
- B. Self IP is configured to allow TCP All

- C. Self IP is configured to allow UDP 443
- D. Packet Filter is configured to allow port 443

Answer: C

NEW QUESTION 109

A BIG-IP Administrator needs to apply a license to the BIG-IP system to increase the user count from the base license. Which steps should the BIG-IP Administrator?

- A. System License > Re-activate> Add-On Registration> Edit
- B. System > License > Re-activate > Base Registration> Edit
- C. Device Management > Devices > Select BIG-IP System > Update
- D. System > Configuration > Device > General

Answer: A

NEW QUESTION 110

What is the purpose of provisioning?

- A. Provisioning allows modules that are not licensed to be fully tested.
- B. Provisioning allows modules that are licensed be granted appropriate resource levels.
- C. Provisioning allows the administrator to activate modules in nonstandard combinations.
- D. Provisioning allows the administrator to see what modules are licensed, but no user action is ever required.

Answer: B

NEW QUESTION 111

A BIG-IP device is replaced with an RMA device. The BIG-IP Administrator renews the license and tries to restore the configuration from a previously generated UCS archive on the RMA device. The device configuration is NOT fully loading. What is causing the configuration load to fail?

- A. The Device Group is NOT configured for Full Sync.
- B. The UCS does NOT contain the full config
- C. The clock is NOT set correctly
- D. The Master Key is NOT restored

Answer: D

NEW QUESTION 114

On the VCMP system, a BIG-IP host administrator imports a new ISO image into the host's /shared/images folder. The new ISO images that reside on the vCMP host are available for installation on the guest. How should the BIG-IP Administrator install one image from within the guest?

- A. Install the new software on the host and wait for it to automatically be installed on all guests.
- B. Run the following command on guesttmsh install sys software block-device-image image_name volume < volume_name>
- C. Run the following command on guesttmsh install sys software image image_name volume < volume_name>
- D. Run the following command on hosttmsh install sys software block-device-image image_name volume < volume_name>

Answer: D

NEW QUESTION 116

All pool members are online. All other virtual server settings are at default What might affect the load balancing behavior?

- A. enabling SNAT automap
- B. enabling a fallback host in the http profile
- C. adding a oneconnect profile
- D. adding a persistence profile

Answer: D

NEW QUESTION 120

The BIG-IP Administrator generates QKView using tmsh command "qkview -SO". In which directory does the BIG-IP appliance save the QKView?

- A. /etc/tmp
- B. /var/tmp
- C. /shared/qkview
- D. /var /tmp/qkview

Answer: B

NEW QUESTION 121

A virtual server is listening at 10.10.1.100:any and has the following iRule associated with it: when CLIENT_ACCEPTED { if {[TCP::local_port] equals 21 } { pool ftppool } elseif {[TCP::local_port] equals 23 } { pool telnetpool } }

If a user connects to 10.10.1.100 and port 22, which pool will receive the request?

- A. ftppool
- B. telnetpool

- C. Non
- D. The request will be dropped.
- E. Unknow
- F. The pool cannot be determined from the information provided.

Answer: D

NEW QUESTION 124

An ecommerce company is experiencing latency issues with online shops during Black Friday's peak season. The BIG-IP Administrator detects an overall high CPU load on the BIG-IP device and wants to move the top utilized Virtual Servers to a dedicated BIG-IP device. Where should the BIG-IP Administrator determine the problematic Virtual Servers?

- A. System > Platform
- B. Local Traffic > Virtual Servers > Virtual Server List
- C. Local Traffic > Network Map
- D. Statistics > Module Statistics > Local Traffic > Virtual Servers

Answer: D

NEW QUESTION 127

When can a single virtual server be associated with multiple profiles?

- A. Neve
- B. Each virtual server has a maximum of one profile.
- C. Ofte
- D. Profiles work on different layers and combining profiles is common.
- E. Rarel
- F. One combination, using both the TCP and HTTP profile does occur, but it is the exception.
- G. Unlimite
- H. Profiles can work together in any combination to ensure that all traffic types are supported in a given virtual server.

Answer: B

NEW QUESTION 131

Refer to the exhibit.

A user notifies the BIG-IP Administrator that `http://remote.company.com` is NOT accessible. Remote access to company resources must be encrypted. What should the BIG-IP Administrator do to fix the issue?

- A. Change the Listening Port on `remote.company.com_vs` to Port 80
- B. Add a Pool to the Virtual Server `remote.company.com_VS`
- C. Add an iRule to `remote.company.com_vs` to redirect Traffic to HTTPS
- D. Change the Type of the Virtual Server `remote.company.com_vs` to Forwarding

Answer: C

Explanation:

Requiring all traffic to be HTTPS access requires HTTP requests to be redirected directly to HTTPS.

NEW QUESTION 132

The interface 1.1 of the BIG-IP device has been connected to a link dedicated to traffic on VLAN 120. What should the BIG-IP Administrator do to receive traffic from the VLAN?

- A. Create a new VLAN object and set Customer Tag to 120
- B. Create a new VLAN object and assign the interface 1.1 untagged
- C. Create a new trunk object with interface 1.1 assigned
- D. Create a new trunk object and assign it to the VLAN

Answer: B

NEW QUESTION 134

A BIG-IP Administrator opens a case with F5 Support. The support engineer requests the BIG-IP appliance chassis serial number. Which TMSH command will provide this information?

- A. `. list /sys software`
- B. `show /sys version`
- C. `list/sys diags`
- D. `show /sys hardware`

Answer: D

NEW QUESTION 139

Which three properties can be assigned to nodes? (Choose three.)

- A. ratio values
- B. priority values
- C. health monitors
- D. connection limits

E. loadbalancing mode

Answer: ACD

NEW QUESTION 142

A BIG-IP Administrator needs to view the CPU utilization of a particular Virtual Server. Which section of the Configuration Utility should the administrator use for this purpose?

- A. Statistics > Module Statistics > Local Traffic > Virtual Addresses
- B. Statistics > Module Statistics > Traffic Summary
- C. Statistics > Analytics > Process CPU Utilization
- D. Statistics > Module Statistics > Local Traffic > Virtual Servers

Answer: D

NEW QUESTION 144

Refer to the exhibit.

A BIG-IP Administrator configures the Virtual Server to pass HTTP traffic. Users report that they are unable to access the application. What should the administrator do to resolve this issue?

- A. Change the Virtual Server name
- B. Disable the State
- C. Reconfigure the Source Address
- D. Reconfigure the Pool Members

Answer: D

NEW QUESTION 147

A standard virtual server is defined with a pool and a SNAT using automap. All other settings for the virtual server are at defaults. When client traffic is processed by the BIG-IP, what will occur to the IP addresses?

- A. Traffic initiated by the pool members will have the source address translated to a self-IP address but the destination address will not be changed.
- B. Traffic initiated to the virtual server will have the destination address translated to a pool member address and the source address translated to a self-IP address.
- C. Traffic initiated by selected clients, based on their IP address, will have the source address translated to a self-IP address but the destination will only be translated if the traffic is destined to the virtual server.
- D. Traffic initiated to the virtual server will have the destination address translated to a pool member address and the source address translated to a self-IP address.
- E. Traffic arriving destined to other destinations will have the source translated to a self-IP address only.

Answer: B

NEW QUESTION 152

The ICMP monitor has been assigned to all nodes. In addition, all pools have been assigned custom monitors. The pool is marked available. If a pool is marked available (green) which situation is sufficient to cause this?

- A. All of the pool member nodes are responding to the ICMP monitor as expected.
- B. Less than 50% of the pool member nodes responded to the ICMP echo request.
- C. All of the members of the pool have had their content updated recently and their responses no longer match the monitor.
- D. Over 25% of the pool members have had their content updated and it no longer matches the receive rule of the custom monitor.
- E. The other respond as expected.

Answer: D

NEW QUESTION 157

Which statement describes a typical purpose of iRules?

- A. iRules can be used to add individual control characters to an HTTP data stream.
- B. iRules can be used to update the timers on monitors as a server load changes.
- C. iRules can examine a server response and remove it from a pool if the response is unexpected.
- D. iRules can be used to look at client requests and server responses to choose a pool member to select for load balancing

Answer: A

NEW QUESTION 160

Assume a virtual server has a ServerSSL profile. What SSL certificates are required on the pool members?

- A. No SSL certificates are required on the pool members.
- B. The pool members' SSL certificates must only exist.
- C. The pool members' SSL certificates must be issued from a certificate authority.
- D. The pool members' SSL certificates must be created within the company hosting the BIGIPs.

Answer: B

NEW QUESTION 165

The incoming client IP address is 195.64.45.52 and the last five connections have been sent to members A, C, E, D and B. Given the virtual server, pool, and

persistence definitions and statistics shown in the above graphic, which member will be used for the next connection?

- A. 10.10.20.1:80
- B. 10.10.20.2:80
- C. 10.10.20.3:80
- D. 10.10.20.4:80
- E. 10.10.20.5:80
- F. It cannot be determined with the information given.

Answer: C

NEW QUESTION 168

Refer to the exhibit.



How many nodes are represented on the network map shown?

- A. Four
- B. Three
- C. One
- D. Two

Answer: B

NEW QUESTION 173

What should the 816-IP Administrator provide when opening a new ticket with F5 Support?

- A. bigip.license file
- B. QKViewfile
- C. Device root password
- D. SSL private keys

Answer: B

NEW QUESTION 177

A user wants to use the iHealth Upgrade Advisor to determine any issues with upgrading TMOS from 13.0 to 13.1. Where can the user generate the QKView to upload to iHealth?

- A. System > Software Management
- B. System > Archives
- C. System > Configuration
- D. System > Support

Answer: D

NEW QUESTION 181

Active connections to pool members are unevenly distributed. The load balancing method is Least Connections (member) Priority Group Activation is disabled. What is a potential cause of the event distribution?

- A. Priority Group Activation is disabled
- B. SSL Profile Server is applied
- C. Persistence profile is applied
- D. incorrect load balancing method

Answer: C

NEW QUESTION 183

You need to terminate client SSL traffic at the BIG-IP and also to persist client traffic to the same pool member based on a BIG IP supplied cookie. Which four are profiles that would normally be included in the virtual server's definition? (Choose four.)

- A. TCP
- B. HTTP
- C. HTTPS
- D. ClientSSL
- E. ServerSSL
- F. CookieBased Persistence

Answer: ABDF

NEW QUESTION 188

Refer to the exhibit.

```
root@(v1161) (cfg-sync Standalone) (Active) (/Common) (tmsh) # 1
ltm virtual http
  destination
  ip-protocol
  last-modified
  mask 255.255.255.255
  pool LAMP12
  profiles (
    http (
      mptcp-m
      stream
    )
  )
  source 0.0.0.0
  translate-a
  translate-p
  vs-index 10
}
root@(v1161) (cfg-sync Standalone) (Active) (/Common) (tmsh) # 1
ltm pool LAMP12
  members (
    10.1.20.11:http {
      address 10.1.
      session monit
      state up
    }
    10.1.20.12:http {
      address 10.1.
      session monit
      state up
    }
  )
  monitor tcp
```

A BIG-IP Administrator creates a new Virtual Server. The end user is unable to access the page. During troubleshooting, the administrator learns that the connection between the BIG-IP system and server is NOT set up correctly. What should the administrator do to solve this issue?

- A. Disable Address Translation
- B. Set Address Translation to Auto Map, configure a SNAT pool, and have pool members in the same subnet of the servers
- C. Set Address Translation to SNAT and configure a specific translation address
- D. Set Address Translation to SNAT and have self-IP configured in the same subnet of servers

Answer: C

Explanation:

The status of the pool can be seen that the members are all up, indicating that the network from F5 to the server is no problem, so there is no need to configure selfip on the same subnet. The monitor is normal but the access is not normal, you have to consider the problem of snat, you can configure automap or configure snat and specify snat ip.

NEW QUESTION 190

A BIG-IP Administrator needs to have a BIG-IP linked to two upstream switches for resilience of the external network. The network engineer who is going to configure the switch instructs the BIG-IP Administrator to configure interface binding with LACP. Which configuration should the administrator use?

- A. A virtual server with an LACP profile and the switches' management IPs as pool members.
- B. A virtual server with an LACP profile and the interfaces connected to the switches as pool members.
- C. A Trunk listing the allowed VLAN IDs and MAC addresses configured on the switches.
- D. A Trunk containing an interface connected to each switch.

Answer: D

NEW QUESTION 194

Which is an advantage of terminating SSL communication at the BIGIP rather than the ultimate web server?

- A. Terminating SSL at the BIG-IP can eliminate SSL processing at the web servers.
- B. Terminating SSL at IP the eliminates BIG all unencrypted traffic from the internal network.
- C. Terminating SSL at the BIG-IP eliminates the need to purchase SSL certificates from a certificate authority.
- D. Terminating SSL at the BIG-IP eliminates the need to use SSL acceleration hardware anywhere in the network.

Answer: A

NEW QUESTION 196

Assume a virtual server has a ServerSSL profile. What SSL certificates are required on the BIG-IP?

- A. No SSL certificates are required on the BIG-IP.
- B. The BIG-IP's SSL certificates must only exist.
- C. The BIG-IP's SSL certificates must be issued from a certificate authority.

D. The BIG-IP's SSL certificates must be created within the company hosting the BIG-IPs.

Answer: A

NEW QUESTION 198

How should a BIG-IP Administrator persistent sessions from being sent to a pool member so that the server administrator can perform maintenance?

- A. force the pool member offline
- B. disable the pool member
- C. add an additional monitor to the pool
- D. disable the virtual server

Answer: A

NEW QUESTION 199

A BIG-IP Administrator is working with a BIG-IP device and discovers that one of the Interfaces on a Trunk is DOWN. What is the reason for this Interface status?

- A. The switch is NOT connected to the Interface
- B. There is NO transceiver installed on the Interface
- C. There is NO default route configured for this trunk
- D. The media speed of the interface has NOT been set

Answer: A

NEW QUESTION 202

Refer of the exhibit.

```
show /cm device bigip1.local bigip3.local
```

```
CentMgmt::Device: bigip1.local
```

```
-----
Hostname                bigip3.local
Mgmt Ip                  172.1.1.233
Configsync Ip            10.1.1.43
Mirroring IP             ::
Mirroring Secondary IP   ::
Failover Multicast IP    ::
Failover Unicast IP(s)   10.1.1.43
Device HA State          standby
Device HA Load Capacity  0
Device Current Load Factor 0
Device Next Active Load Factor 0
Time Delta to Local Device (sec) 12
-----
```

The BIG-IP Administrator runs the command shown and observes a device trust issue between BIG-IP devices in a device group. The issue prevents config sync on device bigip3.local.

What is preventing the config sync?

- A. Next Active Load factor is 0 on bigip1.local
- B. Both devices are standby
- C. Next Active Load factor is 1 on bigip1.local
- D. Time Delta to local system is 12

Answer: A

Explanation:

Option A should be bigip3.local?. if choose bigip3.local, you should choose A.

NEW QUESTION 206

A BIG-IP Administrator is making adjustments to an iRule and needs to identify which of the 235 virtual server configured on the BIG-IP device will be affected.

How should the administrator obtain this information in an effective way?

- A. Local Traffic > Virtual Server
- B. Local traffic Pools
- C. LOCAL Traffic > Network Map
- D. Local traffic > Rules

Answer: C

NEW QUESTION 210

Where is connection mirroring configured?

- A. It an option within a TCP profile.
- B. It is an optional feature of each pool.
- C. It is not configured; it is default behavior.
- D. It is an optional feature of each virtual server.

Answer: D

NEW QUESTION 213

A BIG-IP Administrator is performing maintenance on the active BIG-IP device of an HA pair. The BIG-IP Administrator needs to minimize traffic disruptions. What should the BIG-IP Administrator do to start the maintenance activity?

- A. Reboot the BIG-IP device.
- B. Move resources to a new Traffic Group.
- C. Force the BIG-IP device to standby.
- D. Disable switch ports of the BIG-IP device.

Answer: C

NEW QUESTION 217

When upgrading a BIG-IP redundant pair, what happens when one system has been updated but the other has not?

- A. Synching should not be performed.
- B. The first system to be updated will assume the Active role.
- C. This is not possible since both systems are updated simultaneously.
- D. The older system will issue SNMP traps indicating a communication error with the partner.

Answer: A

NEW QUESTION 220

Assume the bigd daemon fails on the active system. Which three are possible results? (Choose three.)

- A. The active system will restart the bigd daemon and continue in active mode.
- B. The active system will restart the tmm daemon and continue in active mode.
- C. The active system will reboot and the standby system will go into active mode.
- D. The active system will failover and the standby system will go into active mode.
- E. The active system will continue in active mode but gather member and node state information from the standby system.

Answer: ACD

NEW QUESTION 222


Assuming there are open connections through an active system's NAT and a fail over occurs, by default, what happens to those connections?

- A. All open connections will be lost.
- B. All open connections will be maintained.
- C. The "Mirror" option must be chosen on the NAT and the setting synchronized prior to the connection establishment.
- D. Longlived connections such as Telnet and FTP will be maintained while shortlived connections such as HTTP will be lost.
- E. All open connections are lost, but new connections are initiated by the newly active BIG IP, resulting in minimal client downtime.

Answer: B

NEW QUESTION 223

Refer to the exhibit.

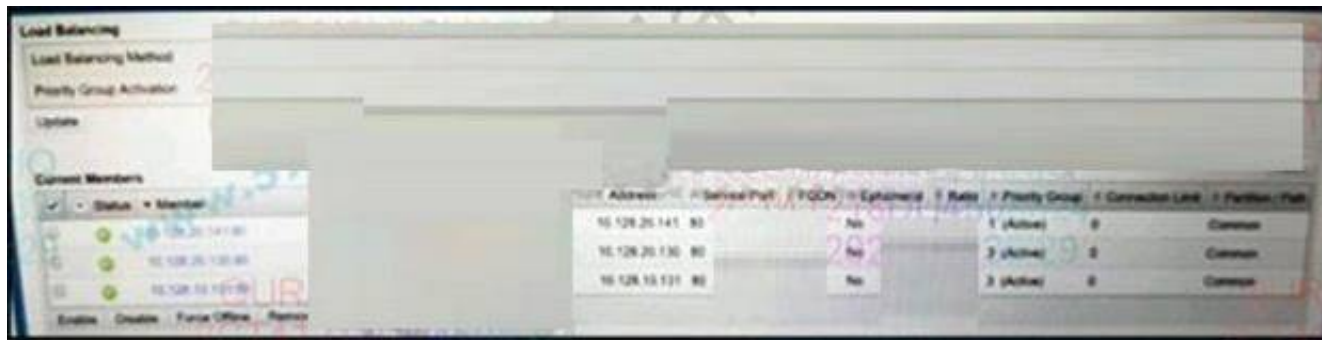

Member	Address	Service Port	TGID	Endpoint	Rate	Priority Group	Connection Limit	Partition	Path
1	10.128.20.141	80	No	No	1 (Active)	0	Common		
2	10.128.20.130	80	No	No	2 (Active)	0	Common		
3	10.128.15.131	80	No	No	3 (Active)	0	Common		

How are new connections load balanced?

- A. To the first two members listed with the same priority group
- B. To the pool member with the least number of connections
- C. To the pool member with a high priority group value defined
- D. To the pool member with a low priority group value defined

Answer: B

NEW QUESTION 225



A BIG-IP Administrator plans to resolve a non-critical issue with a BIG-IP device in 2 weeks. What Severity level should be assigned to this type of F5 support ticket?

- A. 4
- B. 2
- C. 3
- D. 1

Answer: A

NEW QUESTION 227

Refer to the exhibit

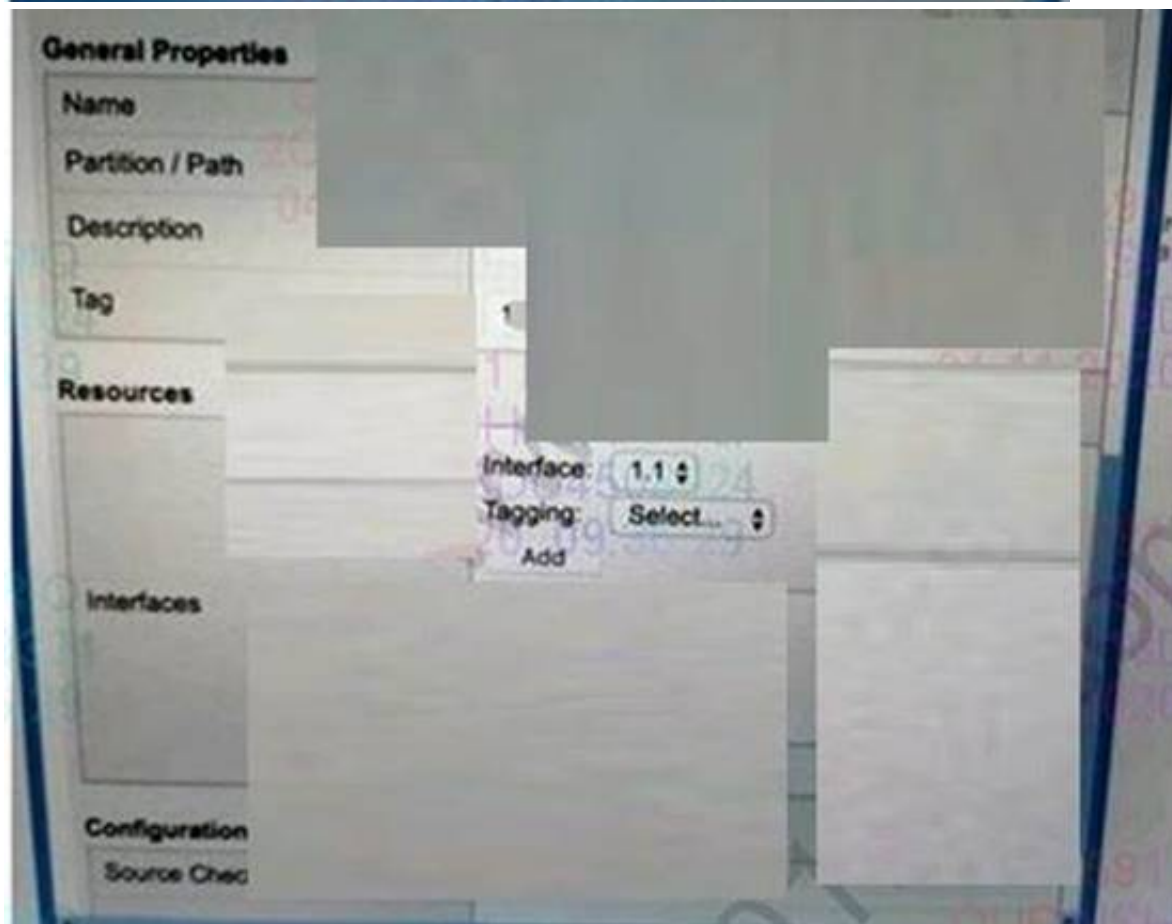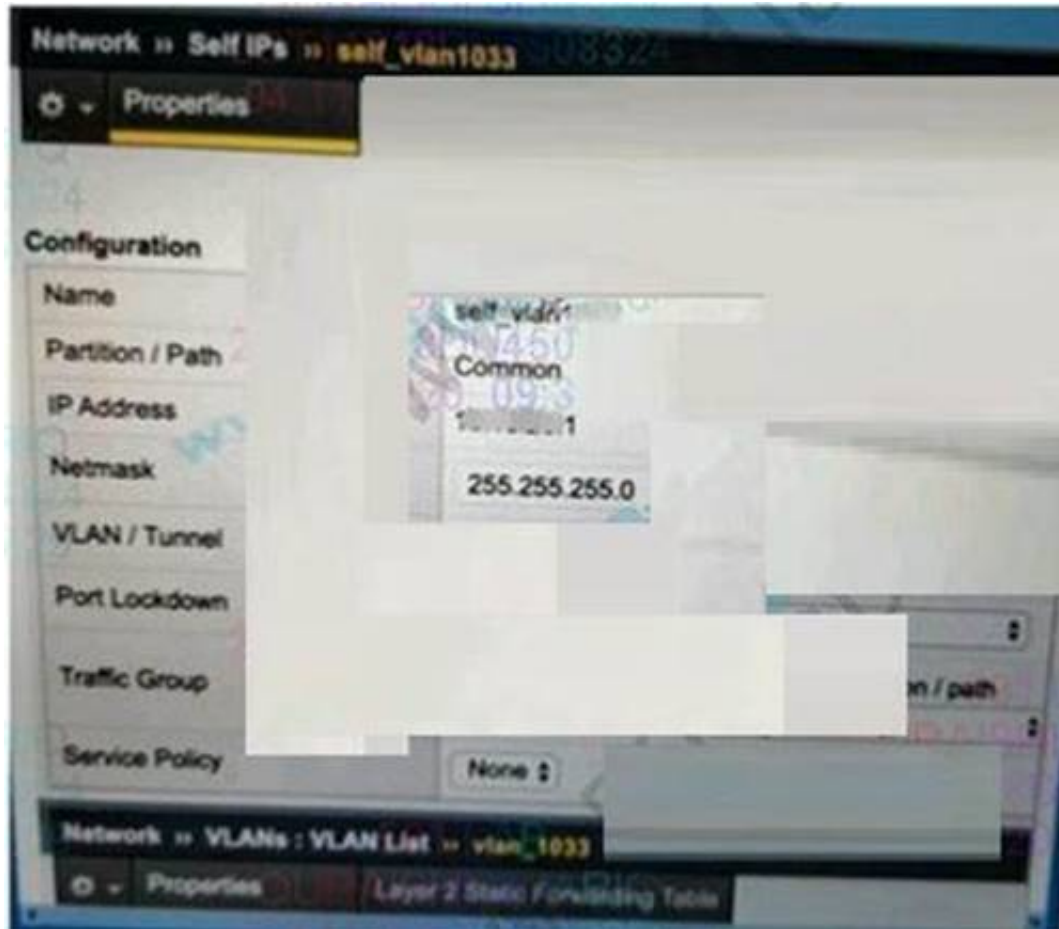

The network team creates a new VLAN on the switches. The BIG-IP Administrator needs to create a configuration on the BIG-IP device. The BIG-IP Administrator creates a new VLAN and Self IP, but the servers on the new VLAN are NOT reachable from the BIG-IP device. Which action should the BIG-IP Administrators to resolve this issue?

- A. Set Port Lockdown of Set IP to Allow All
- B. Change Auto Last Hop to enabled
- C. Assign a physical interface to the new VLAN
- D. Create a Floating Set IP Address

Answer: C

NEW QUESTION 232

Which type of Virtual Server requires the use of a FastL4 profile?

- A. Performance (Layer 4)
- B. Stateless
- C. Performance (HTTP)
- D. Standard

Answer: A

NEW QUESTION 237

Which parameters are set to the same value when a pair of BIG-IP devices are synchronized?

- A. host names
- B. system clocks
- C. profile definitions
- D. VLAN failsafe settings
- E. MAC masquerade addresses

Answer: C

NEW QUESTION 239

Which method is recommended for creating a new user from the CLI?

- A. Run `f5adduser username` then `'f5passwd username'` from bash or tmsh
- B. Run `tmsh create auth user username prompt for password` from bash
- C. edit `bigip.conf` to add the new user and the user's clear-text password
- D. Run `useradd username` then `'passwd username'` from bash tmsh

Answer: B

NEW QUESTION 244

Refer to the exhibit.

Which TMSH command generated this output?

- A. `tmsh list /cm sync-status`
- B. `tmsh show /sys sync-status`
- C. `tmsh list /sys sync-status`
- D. `tmsh show /cm sync status`

Answer: D

NEW QUESTION 247

Which two statements are true concerning the default communication between a redundant pair of BIG-IP systems? (Choose two.)

- A. Synchronization occurs via a TCP connection using ports 683 and 684.
- B. Connection mirroring data is shared via a TCP connection using port 1028.
- C. Persistence mirroring data is shared via a TCP connection using port 1028.
- D. Connection mirroring data is shared through the serial fail over cable unless network failover is enabled.

Answer: BC

NEW QUESTION 248

A BIG-IP Administrator needs to modify a virtual server that web offload web traffic compression tasks from the target server.

Which two profiles must the BIG-IP Administrator apply to a virtual server to enable compression? (Choose two)

- A. Server SSL profile
- B. Stream profile
- C. Persistence profile
- D. HTTP profile
- E. Compression profile

Answer: DE

NEW QUESTION 250

A BIG-IP Administrator assigns the default http health monitor to a pool that has three members listening on port 80 When the administrator connects to each pool member via the CURL utility, two of the members respond with a status of 404 Not Found while the third responds with 200 OK. What will the pool show for member availability?

- A. All members offline.
- B. Two members offline and one member online.
- C. Two members online and one member offline.
- D. All members online.

Answer: D

NEW QUESTION 255

A BIG-IP Administrator must determine if a Virtual Address is configured to fail over to the standby member of a device group in which area of the Configuration

Utility can this be confirmed?

- A. Device Management > Traffic Groups
- B. Device Management > Devices
- C. Local Traffic > Virtual Servers
- D. Device Management > Overview

Answer: C

NEW QUESTION 256

A virtual server is defined using a source address based persistence profile. The last five connections were A, B, C, A, C . Given the conditions shown in the graphic, if a client with IP address 205.12.45.52 opens a connection to the virtual server, which member will be used for the connection?

- A. 10.10.20.1:80
- B. 10.10.20.2:80
- C. 10.10.20.3:80
- D. 10.10.20.4:80
- E. 10.10.20.5:80

Answer: B

NEW QUESTION 259

A BIG-IP Administrator is creating a new Trunk on the BIG-IP device. What objects should be added to the new Trunk being created?

- A. Interfaces
- B. Network routes
- C. VLANs
- D. IP addresses

Answer: A

Explanation:

trunk is a portchannel, you need to add a physical interface.

NEW QUESTION 261

During a high-demand traffic event, the BIG-IP Administrator needs to limit the number of new connections per second allowed to a Virtual Server. What should the administrator apply to accomplish this task?

- A. An HTTP Compression profile to the Virtual Server
- B. A connection rate limit to the Virtual Server
- C. A connection limit to the Virtual Server
- D. A OneConnect profile to the Virtual Server

Answer: B

NEW QUESTION 264

Refer to the exhibit.

Which two pool members should be chosen for a new connection? (Choose two.)

- A. 172.16.15.9.80
- B. 172.16.15.4.80
- C. 172.10.15.2.80
- D. 172.16.15.1.80
- E. 172.16.15.7.80

Answer: BE

NEW QUESTION 268

A custom HTTP monitor is failing to a pool member 10.10.3.75:8080 that serves up www.example.com. A ping works to the pool member address. The SEND string that the monitor is using is: GET/HTTP/I./r/n/Host.www.example.com/r/n/Connection Close/r/n/r/n Which CLI tool syntax will show that the web server returns the correct HTTP response?

- A. curlhttp://10.10.10.3.75:8080/www.example.com/index.html
- B. curl-header 'Host:www.example.com' http://10.10.3.75:8080/
- C. tracepath 'http://www.example.com:80
- D. tracepath 10.10.3.75:8080 GET /index

Answer: B

NEW QUESTION 271

A BIG-IP Administrator has configured a BIG-IP cluster with remote user authentication against dcOl f5trn.com. Only local users can successfully log into the system. Configsync is also failing.

Which two tools should the BIG-IP Administrator use to further investigate these issues? (Choose two)

- A. ntpq
- B. pam_timestamp_check
- C. passwd

- D. pwck
- E. dig

Answer: AC

NEW QUESTION 274

One of the two members of a device group has been decommissioned. The BIG-IP Administrator tries to delete the device group, but is unsuccessful. Prior to removing the device group, which action should be performed?

- A. Disable the device group
- B. Remove all members from the device group
- C. Remove the decommissioned device from the device group
- D. Make sure all members of the device group are in sync

Answer: B

NEW QUESTION 276


Users report that traffic is negatively affected every time a BIG-IP device fails over. The traffic becomes stabilized after a few minutes. What should the BIG-IP Administrator do to reduce the impact of future failovers?

- A. Enable Failover Multicast Configuration
- B. Set up Failover Method to HA Order
- C. Configure MAC Masquerade
- D. Configure a global SNAT Listener

Answer: C

NEW QUESTION 279

Refer to the exhibit.

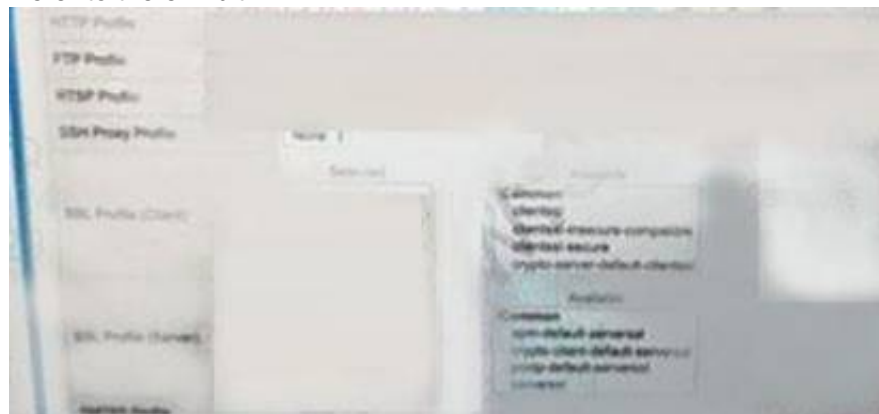

A BIG-IP Administrator configures a Virtual Server to handle HTTPS traffic. Users report that the application is NOT working. Which actional configuration is regard to resolve this issue?

- A. Configure SSL Profile (Client)
- B. Configure Protocol Profile (Server)
- C. Configure Service Profile HTTP
- D. Configure SSL Profile (Server)

Answer: A

NEW QUESTION 280

Which action will take place when a failover trigger is detected by the active system?

- A. The active device will take the action specified for the failure.
- B. The standby device also detects the failure and assumes the active role.
- C. The active device will wait for all connections to terminate and then failover.
- D. The standby device will begin processing virtual servers that have failed, but the active device will continue servicing the functional virtual servers.

Answer: A

NEW QUESTION 284

Assume a virtual server is configured with a ClientSSL profile. What would the result be if the virtual server's destination port were not 443?

- A. SSL termination could not be performed if the virtual server's port was not port 443.
- B. Virtual servers with a ClientSSL profile are always configured with a destination port of 443.
- C. As long as client traffic was directed to the alternate port, the virtual server would work as intended.
- D. Since the virtual server is associated with a ClientSSL profile, it will always process traffic sent to port 443.

Answer: C

NEW QUESTION 287

A BIG-IP Administrator needs to restore a UCS file to an F5 device using the Configuration Utility. Which section of the Configuration Utility should the BIG-IP Administrator access to perform this task?

- A. Local Traffic > Virtual Servers
- B. Local Traffic > Policies

- C. System > Archives
- D. System > Configuration

Answer: C

NEW QUESTION 289

Refer to the exhibit. The BIG-IP Administrator needs to avoid overloading any of the Pool Members with connections, when they become active. What should the BIG-IP Administrator configure to meet this requirement?

- A. Different Ratio for each member
- B. Same Priority Group to each member
- C. Action On Service Down to Reselect
- D. Slow Ramp Time to the Pool

Answer: D

NEW QUESTION 291

The incoming client IP address is 205.12.45.52. The last five connections have been sent to members C, D, A, B, B. Given the virtual server and pool definitions and the statistics shown in the graphic, which member will be used for the next connection?

- A. 10.10.20.1:80
- B. 10.10.20.2:80
- C. 10.10.20.3:80
- D. 10.10.20.4:80
- E. 10.10.20.5:80

Answer: A

NEW QUESTION 294

A local user account (Users) on the BIG-IP device is assigned the User Manager role. User1 attempts to modify the properties of another account (User2), but the action fails. The BIG-IP Administrator can successfully modify the User2 account. Assuming the principle of least privilege, what is the correct way to allow User 1 to modify User2 properties?

- A. Move User2 to the same partition as User1
- B. Grant User1 administrative privileges
- C. Move User to the same partition as User2.
- D. Modify the partition access for User 1

Answer: D

NEW QUESTION 297

Which two statements describe differences between the active and standby systems? (Choose two.)

- A. Monitors are performed only by the active system.
- B. Failover triggers only cause changes on the active system.
- C. Virtual server addresses are hosted only by the active system.
- D. Configuration changes can only be made on the active system.
- E. Floating selfIP addresses are hosted only by the active system.

Answer: CE

NEW QUESTION 300

Which statement is true concerning SNATs using automap?

- A. Only specified self-IP addresses are used as automap addresses.
- B. SNATs using automap will translate all client addresses to an automap address.
- C. A SNAT using automap will preferentially use a floating self-IP over a nonfloating self-IP.
- D. A SNAT using automap can be used to translate the source address of all outgoing traffic to the same address regardless of which VLAN the traffic is sent through.

Answer: C

NEW QUESTION 302

Which must be sent to the license server to generate a new license?

- A. the system's dossier
- B. the system's host name
- C. the system's base license
- D. the system's purchase order number

Answer: A

NEW QUESTION 305

Which two statements are true about SNATs? (Choose two.)

- A. SNATs are enabled on all VLANs, by default.
- B. SNATs can be configured within a Profile definition.
- C. SNATs can be configured within a Virtual Server definition.
- D. SNAT's are enabled only on the VLAN where origin traffic arrives, by default.

Answer: AC

NEW QUESTION 308

A BIG-IP Administrator needs to install a HotFix on a standalone BIG-IP device, which has HD1.1 as the Active Boot Location. The BIG-IP Administrator has already re-activated the license and created an UCS archive of the configuration. In which sequence should the BIG-IP Administrator perform the remaining steps?

- A. Install HotFix in HD 1.1, Reboot the BIG-IP device
- B. Install UCS Archive
- C. Install HotFix in HD 1.2, Install base Image in HD 1.2, Activate HD1.2
- D. Install base Image in HD1.2, Install HotFix in HD1.2, Activate HD 1.2
- E. Activate HD 1.2, Install base image in HD 1.2. Install HotFix in HD 1.2

Answer: C

NEW QUESTION 311

A site needs to terminate client HTTPS traffic at the BIG-IP and forward that traffic unencrypted. Which two are profile types that must be associated with such a virtual server? (Choose two.)

- A. TCP
- B. HTTP
- C. HTTPS
- D. ClientSSL
- E. ServerSSL

Answer: AD

NEW QUESTION 316

The BIG-IP Administrator disables all pool members in a pool. Users are still able to reach the pool members. What is allowing users to continue to reach the disabled pool members?

- A. A slow to time on Pool
- B. A persistence profile on the Virtual Server
- C. A slow ramp time on virtual Server
- D. A persistence profile on the Pool

Answer: B

NEW QUESTION 321

What is required for a virtual server to support clients whose traffic arrives on the internal VLAN and pool members whose traffic arrives on the external VLAN?

- A. That support is never available.
- B. The virtual server must be enabled for both VLANs.
- C. The virtual server must be enabled on the internal VLAN.
- D. The virtual server must be enabled on the external VLAN.

Answer: C

NEW QUESTION 325

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

201 Practice Exam Features:

- * 201 Questions and Answers Updated Frequently
- * 201 Practice Questions Verified by Expert Senior Certified Staff
- * 201 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 201 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 201 Practice Test Here](#)