



Cisco

Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)

NEW QUESTION 1

An engineer is creating a configuration import policy that must terminate if the imported configuration is incompatible with the existing system. Which import mode achieves this result?

- A. merge
- B. atomic
- C. best effort
- D. replace

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401_chapter_01011.html

NEW QUESTION 2

Which components must be configured for the BGP Route Reflector policy to take effect?

- A. spine fabric interface overrides and profiles
- B. access policies and profiles
- C. pod policy groups and profiles
- D. leaf fabric interface overrides and profiles

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/L3-configuration/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401_chapter_01.html

NEW QUESTION 3

Which type of policy configures the suppression of faults that are generated from a port being down?

- A. fault lifecycle assignment
- B. event lifecycle assignment
- C. fault severity assignment
- D. event severity assignment

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/all/faults/guide/b_APIC_Faults_Errors/b_IFC_Faults_Errors_chapter_01.html

NEW QUESTION 4

Which type of profile needs to be created to deploy an access port policy group?

- A. attachable entity
- B. Pod
- C. module
- D. leaf interface

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0110.html

NEW QUESTION 5

A situation causes a fault to be raised on the APIC. The ACI administrator does not want that fault to be raised because it is not directly relevant to the environment. Which action should the administrator take to prevent the fault from appearing?

- A. Under System -> Faults, right-click on the fault and select Acknowledge Fault so that acknowledged faults will immediately disappear.
- B. Create a stats threshold policy with both rising and falling thresholds defined so that the critical severity threshold matches the squelched threshold.
- C. Under System -> Faults, right-click on the fault and select Ignore Fault to create a fault severity assignment policy that hides the fault.
- D. Create a new global health score policy that ignores specific faults as identified by their unique fault code.

Answer: C

NEW QUESTION 6

Which feature dynamically assigns or modifies the EPG association of virtual machines based on their attributes?

- A. vzAny contracts
- B. standard contracts
- C. application EPGs
- D. uSeg EPGs

Answer: D

NEW QUESTION 7

How is an EPG extended outside of the ACI fabric?

- A. Create an external bridged network that is assigned to a leaf port.
- B. Create an external routed network that is assigned to an EPG.
- C. Enable unicast routing within an EPG.
- D. Statically assign a VLAN ID to a leaf port in an EPG.

Answer: D

Explanation:

Reference: <https://www.dcclasses.com/l2-external-network-with-aci>

NEW QUESTION 8

Where is the COOP database located?

- A. leaf
- B. spine
- C. APIC
- D. endpoint


Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 9

Refer to the exhibit.

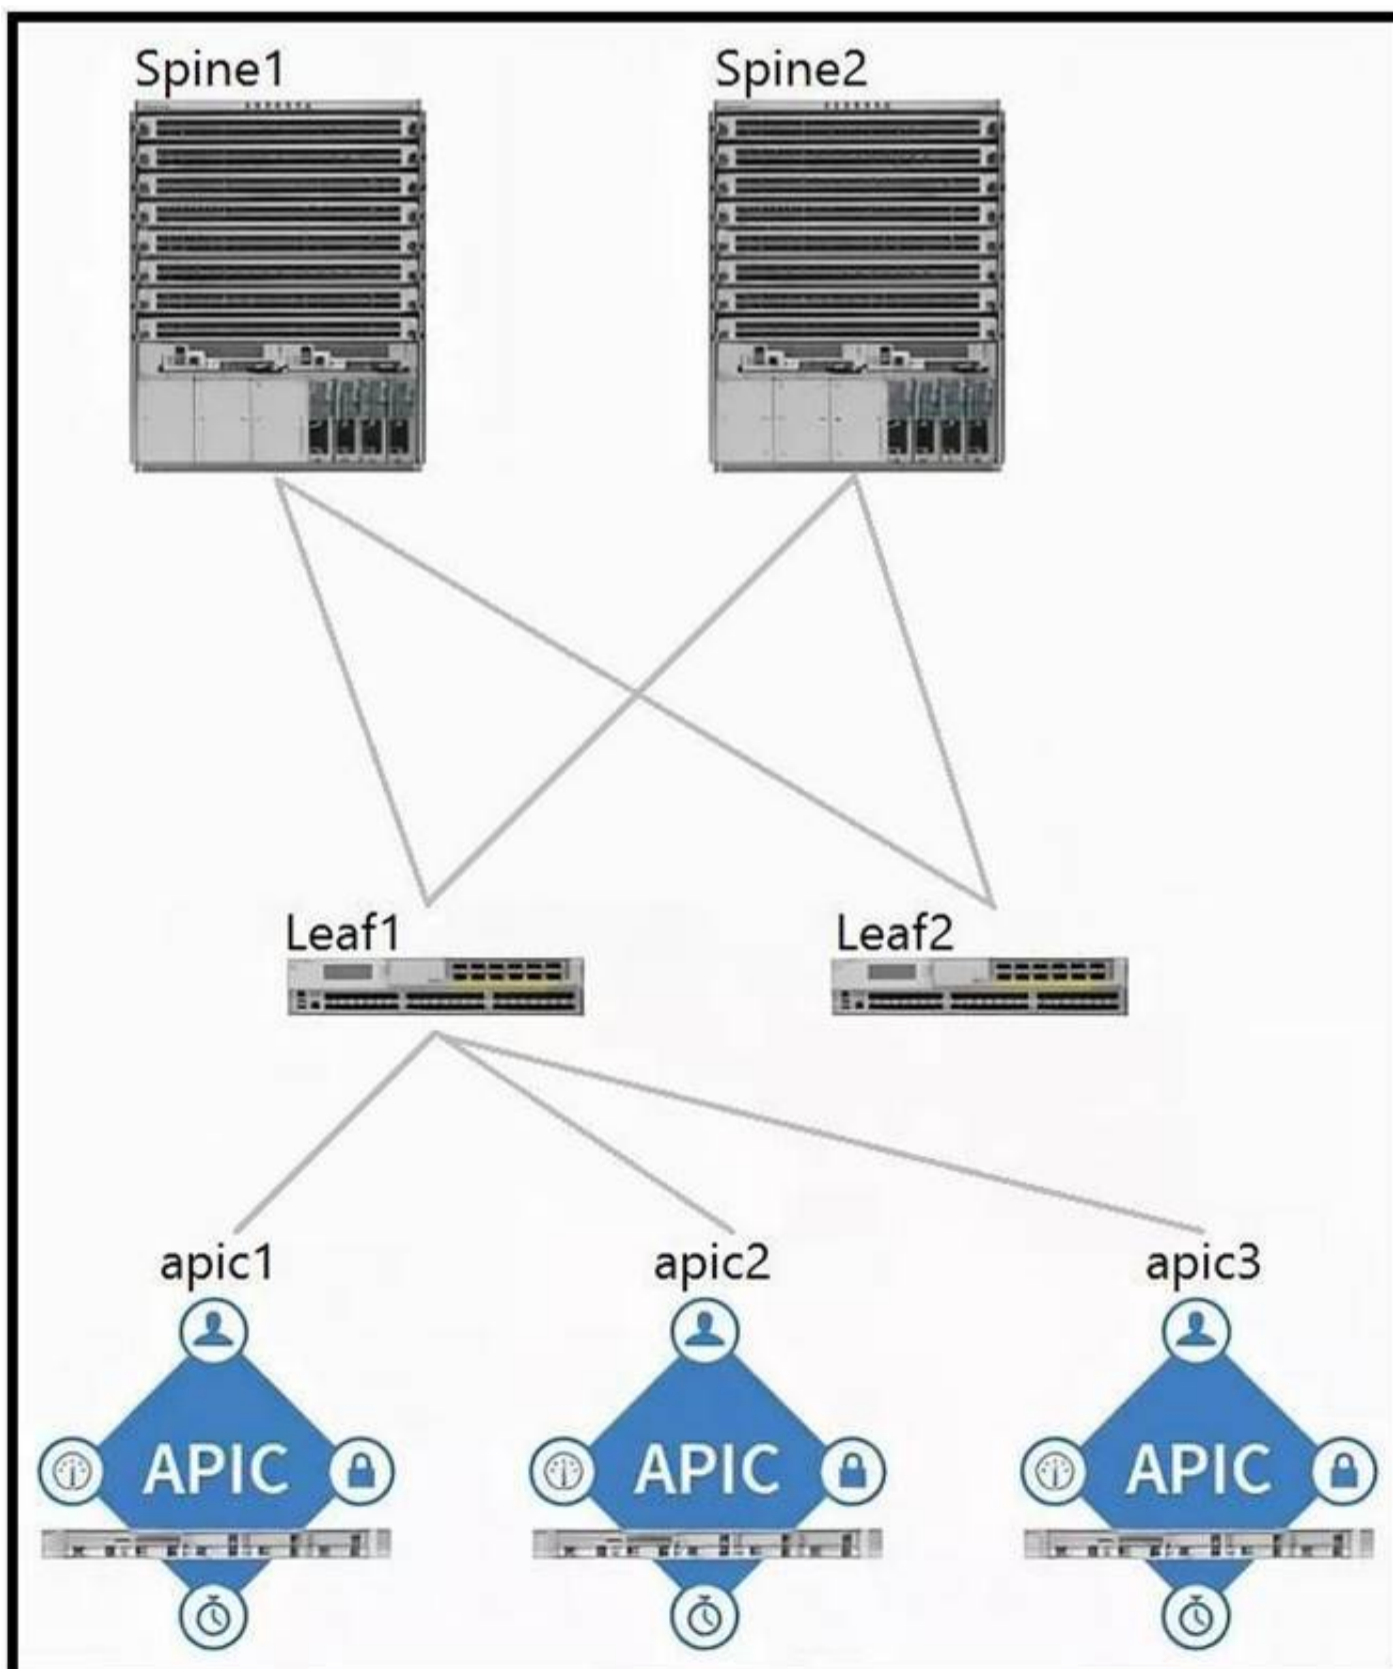

Which two components should be configured as route reflectors in the ACI fabric? (Choose two.)

- A. Spine1
- B. apic1
- C. Spine2
- D. Leaf1
- E. Leaf2
- F. apic2

Answer: AC

NEW QUESTION 10

When creating a subnet within a bridge domain, which configuration option is used to specify the network visibility of the subnet?

- A. limit IP learning to subnet
- B. scope
- C. gateway IP
- D. subnet control

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0111.html

NEW QUESTION 10

Which setting prevents the learning of Endpoint IP addresses whose subnet does not match the bridge domain subnet?

- A. "Limit IP learning to network" setting within the bridge domain.
- B. "Limit IP learning to subnet" setting within the EPG.
- C. "Limit IP learning to network" setting within the EPG.
- D. "Limit IP learning to subnet" setting within the bridge domain.

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 12

What must be enabled in the bridge domain to have the endpoint table learn the IP addresses of endpoints?

- A. L2 unknown unicast: flood
- B. GARP based detection
- C. unicast routing
- D. subnet scope

Answer: C

Explanation:

Reference: <https://hsvglobalschool.in/dhkycw/cisco-aci-bridge-domain.html>

NEW QUESTION 17

An engineer configured Layer 2 extension from the ACI fabric and changed the Layer 2 unknown unicast policy from Flood to Hardware Proxy. How does this change affect the flooding of the L2 unknown unicast traffic?

- A. It is forwarded to one of the spines to perform as a spine proxy.
- B. It is flooded within the whole fabric.
- C. It is dropped by the leaf when the destination endpoint is not present in the endpoint table.
- D. It is forwarded to one of the APICs to perform as a proxy.

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 21

An engineer is implementing a connection that represents an external bridged network. Which two configurations are used? (Choose two.)

- A. Layer 2 remote fabric
- B. Layer 2 outside
- C. Layers 2 internal
- D. Static path binding
- E. VXLAN outside

Answer: AB

NEW QUESTION 22

Which two actions extend a Layer 2 domain beyond the ACI fabric? (Choose two.)

- A. extending the routed domain out of the ACI fabric
- B. creating a single homed Layer 3 Out
- C. creating an external physical network
- D. extending the bridge domain out of the ACI fabric
- E. extending the EPG out of the ACI fabric

Answer: AE

NEW QUESTION 23

Which two dynamic routing protocols are supported when using Cisco ACI to connect to an external Layer 3 network? (Choose two.)

- A. iBGP
- B. VXLAN
- C. IS-IS
- D. RIPv2
- E. eBGP

Answer: AE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 27


Regarding the MTU value of MP-BGP EVPN control plane packets in Cisco ACI, which statement about communication between spine nodes in different sites is true?

- A. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- B. As a result, the Inter-Site network should be able to carry 9000-bytes packets.
- C. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- D. As a result, the Inter-Site network should be able to carry 1800-bytes packets.
- E. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- F. As a result, the Inter-Site network should be able to carry 1500-bytes packets.
- G. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- H. As a result, the Inter-Site network should be able to carry 9100-bytes packets.

Answer: D

NEW QUESTION 30

Refer to the exhibit.

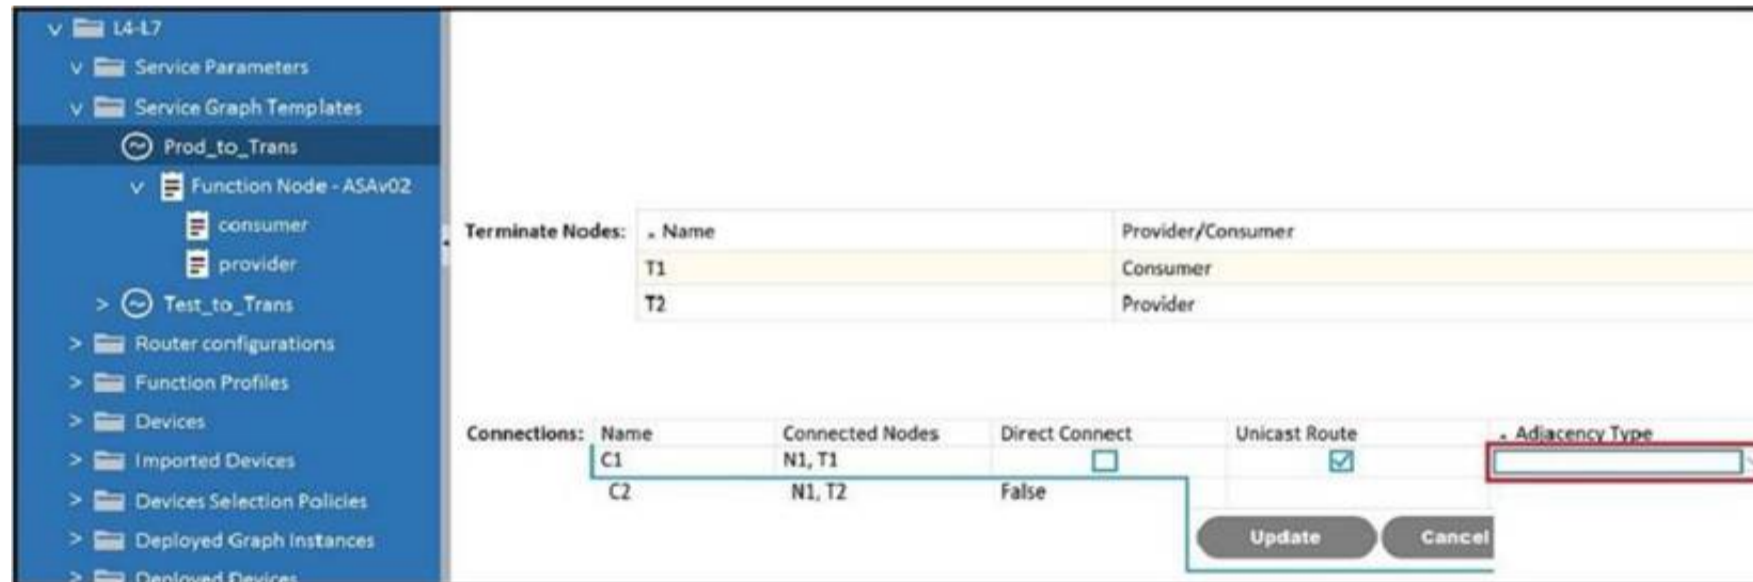

Terminate Nodes:		Name	Provider/Consumer
	T1	Consumer	
	T2	Provider	

Connections:	Name	Connected Nodes	Direct Connect	Unicast Route	Adjacency Type
	C1	N1, T1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
	C2	N1, T2	False		

Update Cancel

Which Adjacency Type value should be set when the client endpoint and the service node interface are in a different subnet?

- A. Routed
- B. Unicast
- C. L3Out
- D. L3

Answer: D

NEW QUESTION 34

Refer to the exhibit.

Create vCenter Domain

vCenter Credentials:

Profile name	Username	Description
Lab-VCenter	admin	

vCenter:

Name	IP	Type	Stats Collection
Lab-VCenter	vcenter.aci.lab	vCenter	Disabled

Port Channel Mode:

select a value

Static Channel – Mode On

LACP Active

LACP Passive

MAC Pinning+

MAC Pinning-Physical-NIC-load

Cancel

Submit

An engineer is implementing Cisco ACI – VMware vCenter integration for a blade server that lacks support of bonding. Which port channel mode results in “route based on originating virtual port” on the VMware VDS?

- A. Static Channel – Mode On
- B. MAC Pinning-Physical-NIC-load
- C. LACP Passive
- D. MAC Pinning+
- E. LACP Active

Answer: D

NEW QUESTION 39

When configuring Cisco ACI VMM domain integration with VMware vCenter, which object is created in vCenter?

- A. datacenter
- B. VMware vSphere Standard vSwitch
- C. VMware vSphere Distributed Switch
- D. cluster

Answer: C

NEW QUESTION 40

DRAG DROP

Drag and drop the Cisco ACI Layer 4 to Layer 7 service insertion terms on the left to the correct descriptions on the right.

concrete interfaces	ensures reachability between L3 domains
service graph	rendered with local resources that are available in the fabric
device cluster	contains an active-standby pair of firewalls or load balancers
VRF stitching	encapsulations programmed based on their association with logical interfaces

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

concrete interfaces	VRF stitching
service graph	service graph
device cluster	device cluster
VRF stitching	concrete interfaces

NEW QUESTION 41

In the context of VMM, which protocol between ACI leaf and compute hosts ensures that the policies are pushed to the leaf switches for immediate and on demand resolution immediacy?

- A. VXLAN
- B. LLDP
- C. ISIS
- D. STP

Answer: A

Explanation:

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_0101.html

NEW QUESTION 45

Which type of port is used for in-band management within ACI fabric?

- A. spine switch port
- B. APIC console port
- C. leaf access port
- D. management port

Answer: C

NEW QUESTION 49

Refer to the exhibit.

Edit Stats Threshold

transmit B2B credit cumulative

Normal Value:

Threshold Direction: Both **Rising** Falling

Rising Thresholds to Config: ☒ ☐

☒ Critical
☐ Major
☐ Minor
☒ Warning

Rising

	Set	Reset
Critical	<input type="text" value="500"/>	<input type="text"/>
Major		
Minor		
Warning	<input type="text" value="400"/>	<input type="text" value="300"/>

A client reports that the ACI domain connectivity to the fiber channel storage is experiencing a B2B credit oversubscription. The environment has a SYSLOG server for state collection messages. Which value should be chosen to clear the critical fault?

- A. 300
- B. 410
- C. 350
- D. 510

Answer: B

NEW QUESTION 54

Which statement about ACI syslog is true?

- A. Notifications for different scopes of syslog objects can be sent only to one destination.
- B. Syslog messages are sent to the destination through the spine.
- C. All syslog messages are sent to the destination through APIC.
- D. Switches send syslog messages directly to the destinations.

Answer: A

Explanation:

Reference: <https://www.ciscolive.com/c/dam/r/ciscolive/us/docs/2016/pdf/BRKACI-2303.pdf>

NEW QUESTION 56

A data center administrator is upgrading an ACI fabric. There are 3 APIC controllers in the fabric and all the servers are dual-homed to pairs of leaf switches configured in VPC mode. How should the fabric be upgraded to minimize possible traffic impact during the upgrade?

- A. * 1. Create two maintenance groups for the APIC controllers: VPC left and VPC right.* 2. Upgrade the first group of controllers.* 3. Upgrade the second group of controllers.* 4. Upgrade the leaf switches.
- B. * 1. Create two maintenance groups for APIC controllers: VPC left and VPC right.* 2. Upgrade the leaf switches.* 3. Upgrade the first group of controllers.* 4. Upgrade the second group of controllers.
- C. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the APIC controllers.* 3. Upgrade the first group of leaf switches.* 4. Upgrade the second group of leaf switches.
- D. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the first group of switches.* 3. Upgrade the second group of switches.* 4. Upgrade the APIC controllers.

Answer: D

NEW QUESTION 60

In the context of ACI Multi-Site, when is the information of an endpoint (MAC/IP) that belongs to site 1 advertised to site 2 using the EVPN control plane?

- A. Endpoint information is not exchanged across sites unless COOP protocol is used.
- B. Endpoint information is not exchanged across sites unless a policy is configured to allow communication across sites.
- C. Endpoint information is exchanged across sites as soon as the endpoint is discovered in one site.
- D. Endpoint information is exchanged across sites when the endpoints are discovered in both sites.

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739609.html#CiscoACIMultiSiteoverlaydataplane>

NEW QUESTION 63

Which statement regarding ACI Multi-Pod and TEP pool is true?

- A. The IP addresses used in the IPN network can overlap TEP pool of the APIC.
- B. A different TEP pool must be assigned to each Pod.
- C. The Pod1 TEP pool must be split and a portion of the TEP pool allocated to each Pod.
- D. The same TEP pool is used in all Pods.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739714.html>

NEW QUESTION 65

Which two statements regarding ACI Multi-Site are true? (Choose two.)

- A. The Multi-Site orchestrator must be directly attached to one ACI leaf.
- B. Routers in the Inter-Site network must run OSPF, DHCP relay, and MP-BGP.
- C. ACI Multi-Site is a solution that supports a dedicated APIC cluster per site.
- D. ACI Multi-Site is a solution that allows one APIC cluster to manage multiple ACI sites.
- E. The Inter-Site network routers should run OSPF to establish peering with the spines.

Answer: AE

NEW QUESTION 70

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 74

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)