

Cisco

Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)



NEW QUESTION 1

An ACI administrator notices a change in the behavior of the fabric. Which action must be taken to determine if a human intervention introduced the change?

- A. Inspect event records in the APIC UI to see all actions performed by users.
- B. Inspect /var/log/audit_messages on the APIC to see a record of all user actions.
- C. Inspect audit logs in the APIC UI to see all user events.
- D. Inspect the output of show command history in the APIC CLI.

Answer: A

NEW QUESTION 2

An engineer is implementing Cisco ACI at a large platform-as-a-service provider using APIC controllers, 9396PX leaf switches, and 9336PQ spine switches. The leaf switch ports are configured as IEEE 802.1p ports. Where does the traffic exit from the EPG in IEEE 802.1p mode in this configuration?

- A. from leaf ports tagged as VLAN 0
- B. from leaf ports untagged
- C. from leaf ports tagged as VLAN 4094
- D. from leaf ports tagged as VLAN 1

Answer: A

NEW QUESTION 3

DRAG DROP

Drag and drop the Cisco ACI filter entry options from the left onto the correct categories on the right indicating what are required or optional parameters.

Name	Optional Parameters
ARP Flag	
Ether Type	
IP Protocol	Required Parameters
Source Port From	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_01000.html

NEW QUESTION 4

Where is the COOP database located?

- A. leaf
- B. spine
- C. APIC
- D. endpoint

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 5

Which description regarding the initial APIC cluster discovery process is true?

- A. The APIC uses an internal IP address from a pool to communicate with the nodes.

- B. Every switch is assigned a unique AV by the APIC.
- C. The APIC discovers the IP address of the other APIC controllers by using Cisco Discovery Protocol.
- D. The ACI fabric is discovered starting with the spine switches.

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-Fundamentals/b_ACI-Fundamentals_chapter_010011.html

NEW QUESTION 6

What does a bridge domain represent?

- A. Layer 3 cloud
- B. Layer 2 forwarding construct
- C. tenant
- D. physical domain

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 7

An engineer is extending an EPG out of the ACI fabric using static path binding. Which statement about the endpoints is true?

- A. Endpoints must connect directly to the ACI leaf port.
- B. External endpoints are in a different bridge domain than the endpoints in the fabric.
- C. Endpoint learning encompasses the MAC address only.
- D. External endpoints are in the same EPG as the directly attached endpoints.

Answer: C

NEW QUESTION 8

An engineer configured Layer 2 extension from the ACI fabric and changed the Layer 2 unknown unicast policy from Flood to Hardware Proxy. How does this change affect the flooding of the L2 unknown unicast traffic?

- A. It is forwarded to one of the spines to perform as a spine proxy.
- B. It is flooded within the whole fabric.
- C. It is dropped by the leaf when the destination endpoint is not present in the endpoint table.
- D. It is forwarded to one of the APICs to perform as a proxy.

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 9

Which action sets Layer 2 loop migration in an ACI Fabric with a Layer 2 Out configured?

- A. Enable MCP on the ACI fabric.
- B. Disable STP in the external network.
- C. Disable STP on the ACI fabric.
- D. Enable STP on the ACI fabric.

Answer: A

NEW QUESTION 10

When Cisco ACI connects to an outside Layers 2 network, where does the ACI fabric flood the STP BPDU frame?

- A. within the bridge domain
- B. within the APIC
- C. within the access encaps VLAN
- D. between all the spine and leaf switches

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c07-732033.html#_Toc395143571

NEW QUESTION 10

Which two dynamic routing protocols are supported when using Cisco ACI to connect to an external Layer 3 network? (Choose two.)

- A. iBGP
- B. VXLAN
- C. IS-IS
- D. RIPv2
- E. eBGP


Answer: AE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 14

Refer to the exhibit.

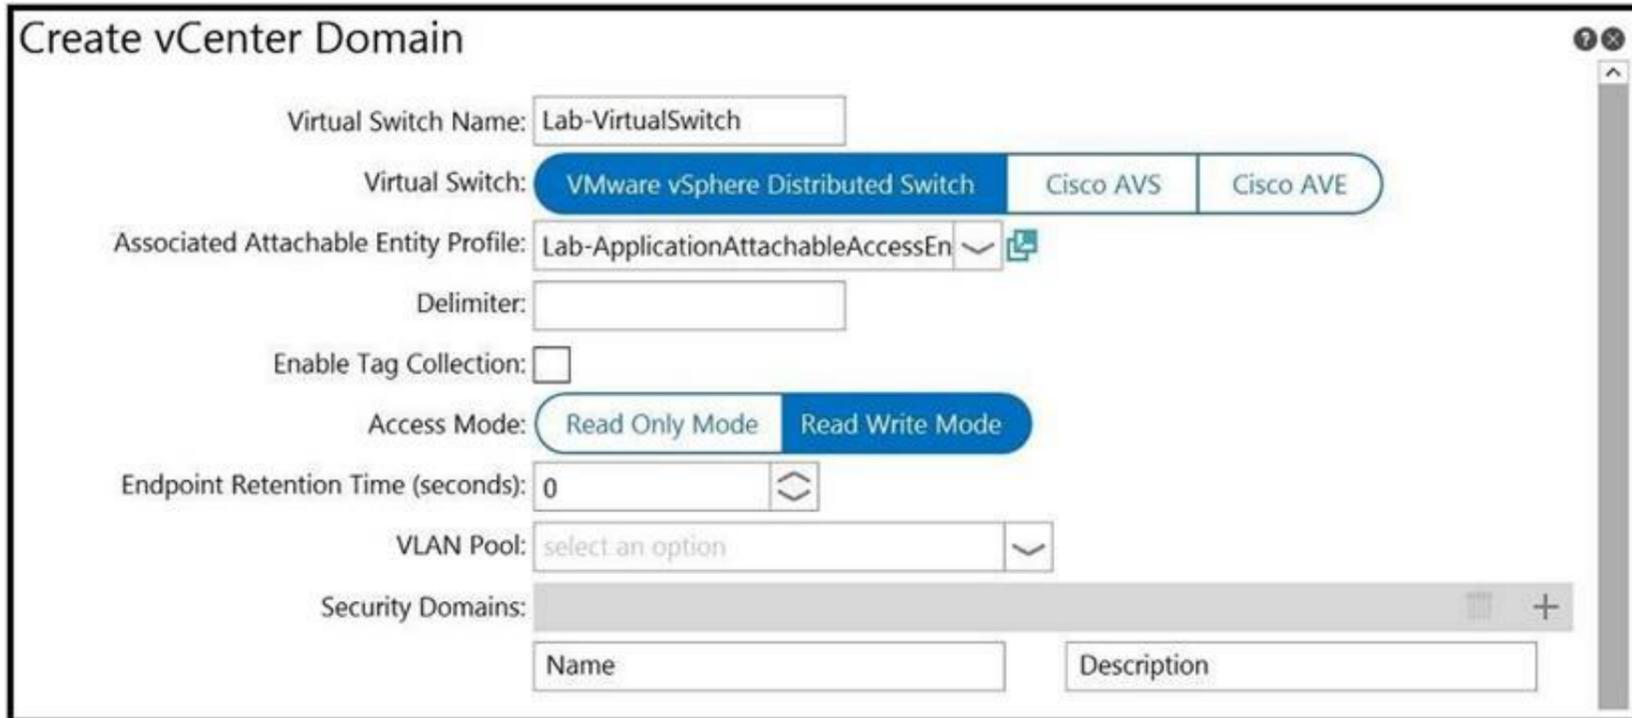

An engineer is integrating a VMware vCenter with Cisco ACI VMM domain configuration. ACI creates port-group names with the format of "Tenant | Application | EPG". Which configuration option is used to generate port groups with names formatted as "Tenant=Application=EPG"?

- A. enable tag collection
- B. security domains
- C. delimiter
- D. virtual switch name

Answer: D

NEW QUESTION 19

Which tenant is used when configuring in-band management IP addresses for Cisco APICs, leaf nodes, and spine nodes?

- A. default
- B. infra
- C. common
- D. mgmt

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html#concept_CFF63FEBE947424291B0F10E6F23DA7D

NEW QUESTION 22

Which statement about ACI syslog is true?

- A. Notifications for different scopes of syslog objects can be sent only to one destination.
- B. Syslog messages are sent to the destination through the spine.
- C. All syslog messages are sent to the destination through APIC.
- D. Switches send syslog messages directly to the destinations.

Answer: A

Explanation:

Reference: <https://www.ciscolive.com/c/dam/r/ciscolive/us/docs/2016/pdf/BRKACI-2303.pdf>

NEW QUESTION 23

Which attribute should be configured for each user to enable RADIUS for external authentication in Cisco ACI?

- A. cisco-security domain
- B. cisco-auth-features

- C. cisco-aci-role
- D. cisco-av-pair

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 24

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)