

Fortinet

Exam Questions FCSS_EFW_AD-7.6

FCSS - Enterprise Firewall 7.6 Administrator



NEW QUESTION 1

Refer to the exhibit, which shows the VDOM section of a FortiGate device.

Name	Management VDOM	Type	NGFW Mode
Core1		Traffic	Profile-based
Core2		Traffic	Profile-based
root		Traffic	Profile-based


An administrator discovers that webfilter stopped working in Core1 and Core2 after a maintenance window. Which two reasons could explain why webfilter stopped working? (Choose two.)

- A. The root VDOM does not have access to FortiManager in a closed network.
- B. The root VDOM does not have a VDOM link to connect with the Core1 and Core2 VDOMs.
- C. The Core1 and Core2 VDOMs must also be enabled as Management VDOMs to receive FortiGuard updates
- D. The root VDOM does not have access to any valid public FDN.

Answer: BD

NEW QUESTION 2

Refer to the exhibit.

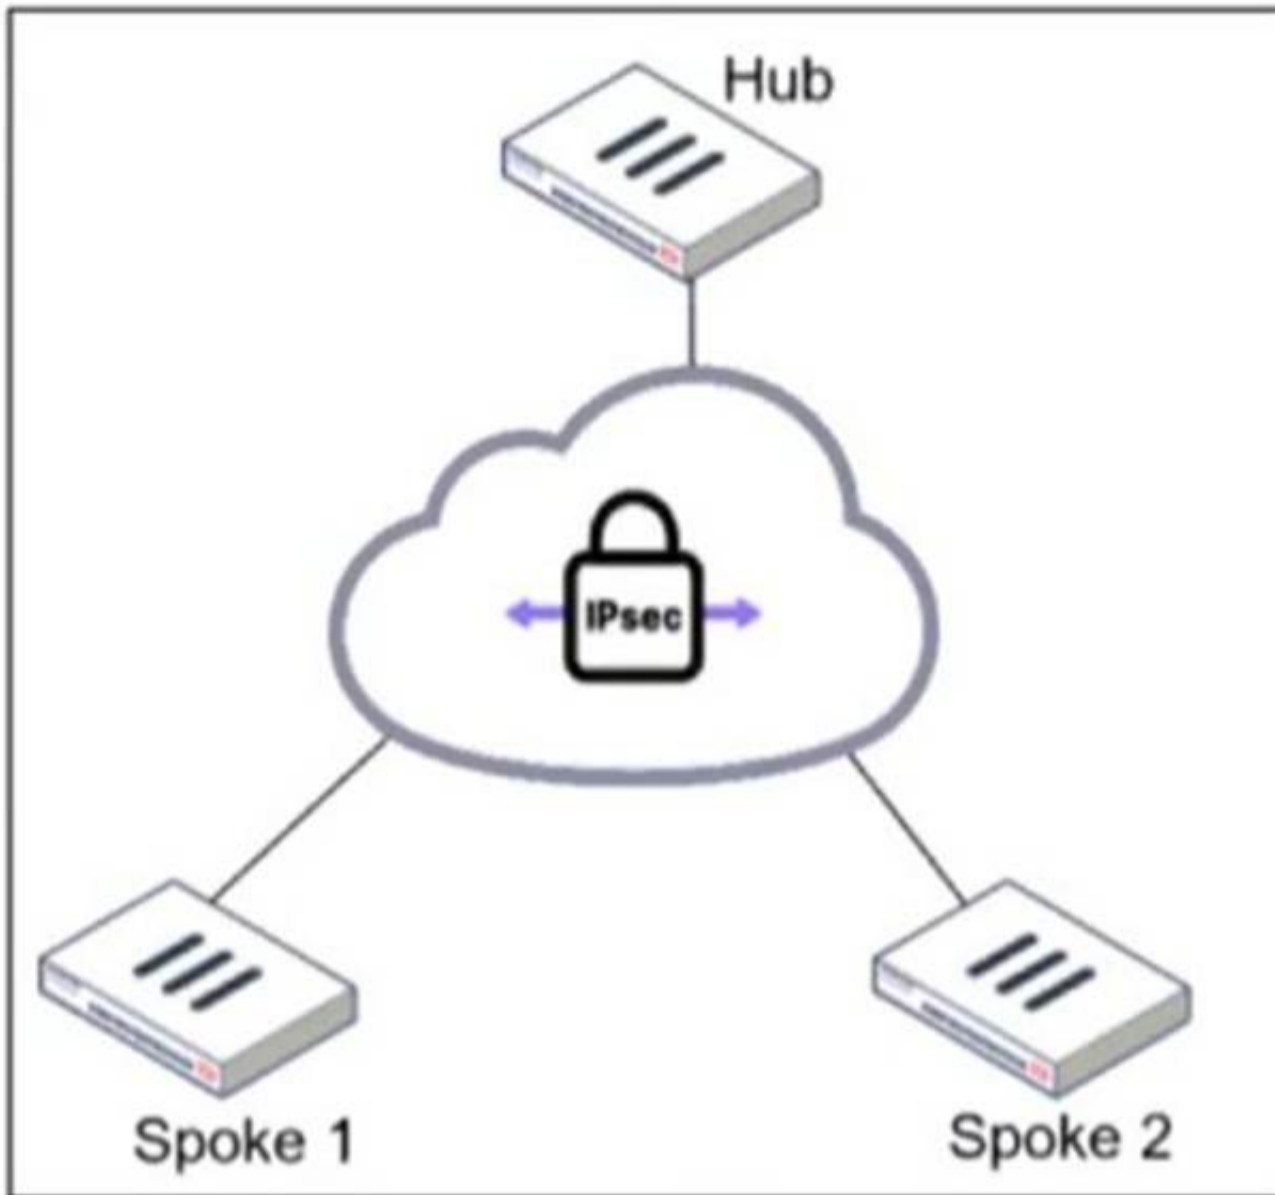

An administrator is deploying a hub and spokes network and using OSPF as dynamic protocol. Which configuration is mandatory for neighbor adjacency?

- A. Set bfd enable in the router configuration
- B. Set network-type point-to-multipoint in the hub interface
- C. Set rfc1583-compatible enable in the router configuration
- D. Set virtual-link enable in the hub interface

Answer: B

NEW QUESTION 3

An administrator must enable direct communication between multiple spokes in a company's network. Each spoke has more than one internet connection. The requirement is for the spokes to connect directly without passing through the hub, and for the links to automatically switch to the best available connection. How can this automatic detection and optimal link utilization between spokes be achieved?

- A. Set up OSPF routing over static VPN tunnels between spokes.
- B. Utilize ADVPN 2.0 to facilitate dynamic direct tunnels and automatic link optimization.
- C. Establish static VPN tunnels between spokes with predefined backup routes.
- D. Implement SD-WAN policies at the hub to manage spoke link quality.

Answer: B

NEW QUESTION 4

Refer to the exhibit, which contains a partial command output.

```

FortiGate # get router info bgp neighbors
VRF 0 neighbor table:
BGP neighbor is 100.65.4.1, remote AS 65300, local AS 65200, external link
BGP version 4, remote router ID 0.0.0.0
BGP state = Idle
Not directly connected EBGP
Last read      , hold time is 180, keepalive interval is 60 seconds
Configured hold time is 180, keepalive interval is 60 seconds
Received 0 messages, 0 notifications, 0 in queue
Sent 0 messages, 0 notifications, 0 in queue
Route refresh request: received 0, sent 0
NLRI treated as withdraw: 0
Minimum time between advertisement runs is 30 seconds
Update source is Loopback
    
```


The administrator has configured BGP on FortiGate. The status of this new BGP configuration is shown in the exhibit. What configuration must the administrator consider next?

- A. Configure a static route to 100.65.4.1.
- B. Configure the local AS to 65300.
- C. Contact the remote peer administrator to enable BGP
- D. Enable ebgp-enforce-multihop.

Answer: D

NEW QUESTION 5

Refer to the exhibit, which shows a network diagram.

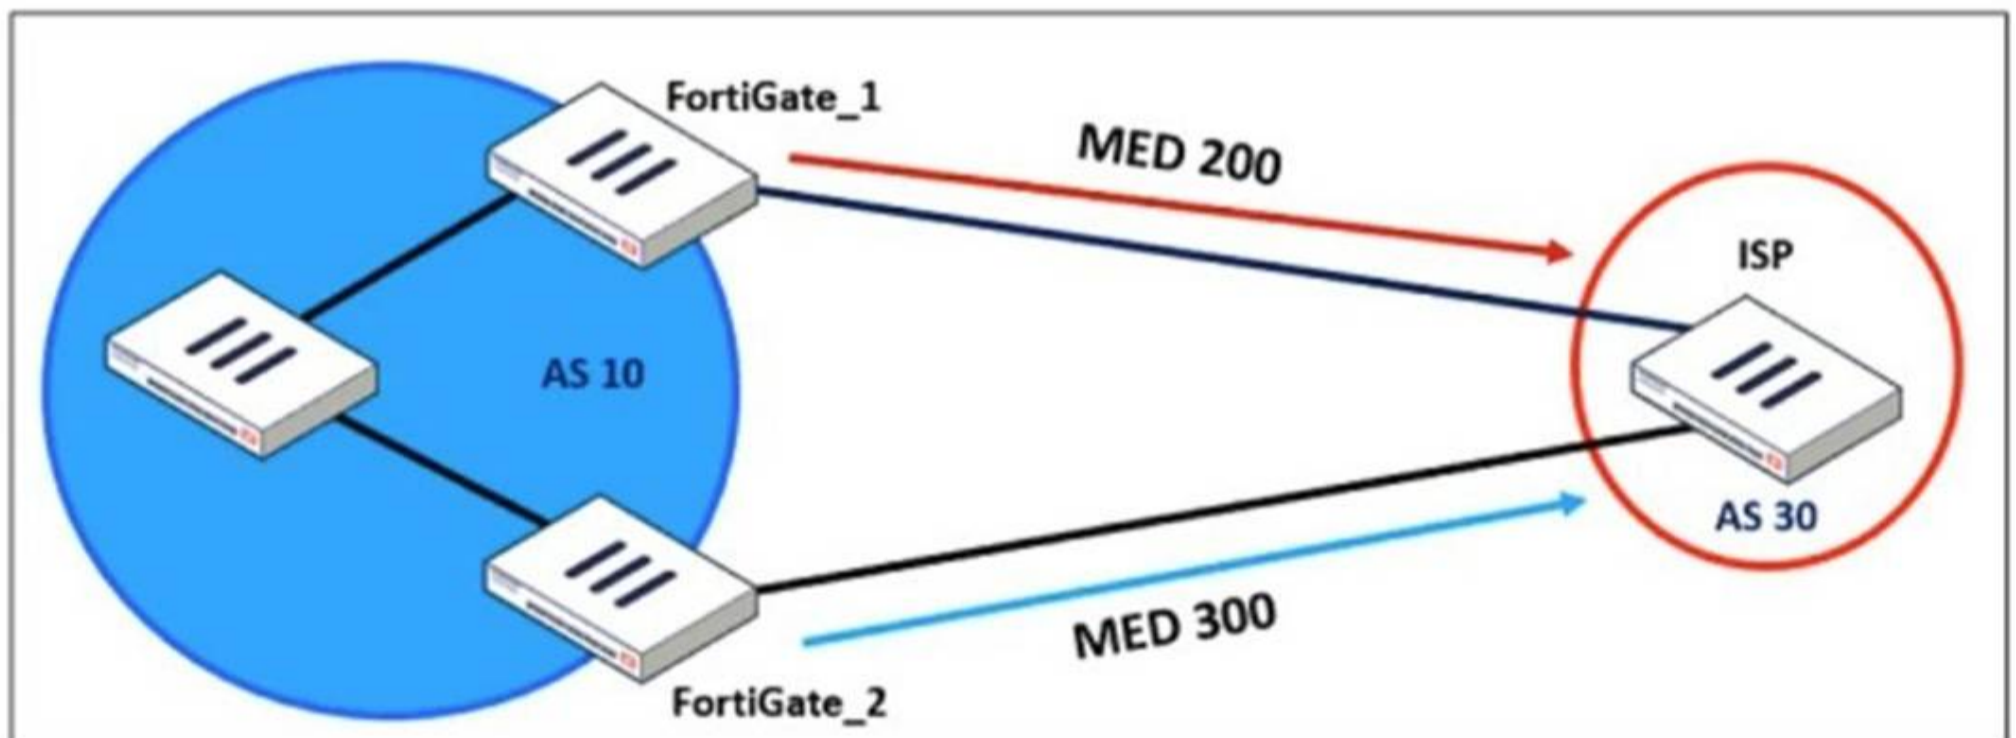

An administrator would like to modify the MED value advertised from FortiGate_1 to a BGP neighbor in the autonomous system 30. What must the administrator configure on FortiGate_1 to implement this?

- A. route-map-out
- B. network-import-check
- C. prefix-list-out
- D. distribute-list-out

Answer: A

NEW QUESTION 6

An administrator received a FortiAnalyzer alert that a 1 disk filled up in a day. Upon investigation, they found thousands of unusual DNS log requests, such as JHCMQK.website.com, with no answers. They later discovered that DNS exfiltration was occurring through both UDP and TLS. How can the administrator prevent this data theft technique?

- A. Create an inline-CASB to protect against DNS exfiltration.
- B. Configure a File Filter profile to prevent DNS exfiltration.
- C. Enable DNS Filter to protect against DNS exfiltration.
- D. Use an IPS profile and DNS exfiltration-related signatures.

Answer: D

NEW QUESTION 7
Refer to the exhibits.

Root FortiGate - System Administrator configuration

System Administrator 2	
admin	super_admin
AdminSSO	super_admin_readonly

Downstream FortiGate - Security Fabric settings

Security Fabric role	<input type="radio"/> Standalone <input type="radio"/> Serve as Fabric Root <input checked="" type="radio"/> Join Existing Fabric
Allow other Security Fabric devices to join	<input checked="" type="checkbox"/> <div style="border: 1px solid #ccc; padding: 2px; display: inline-block;"> port1 ✕ </div> <div style="text-align: center; margin-top: 5px;">+</div>
Upstream FortiGate IP/FQDN	10.1.0.254
Allow downstream device REST API access i	<input type="checkbox"/>
SAML Single Sign-On i	<input checked="" type="radio"/> Auto <input type="radio"/> Manual <div style="border: 1px solid #ccc; padding: 2px; text-align: center; margin-top: 5px;"> ↗ Advanced Options </div>
Mode	Service Provider (SP)
Default login page i	<input checked="" type="radio"/> Normal <input type="radio"/> Single Sign-On
Default admin profile i	<div style="border: 1px solid #ccc; padding: 2px; display: inline-block;"> super_admin_readonly </div>
Management IP/FQDN i	<input type="checkbox"/> Use WAN IP <input checked="" type="checkbox"/> Specify <div style="border: 1px solid #ccc; padding: 2px; margin-top: 5px;">10.1.0.100</div>
Management port	<input type="checkbox"/> Use Admin Port <input checked="" type="checkbox"/> Specify <div style="border: 1px solid #ccc; padding: 2px; margin-top: 5px;">443</div>

The Administrators section of a root FortiGate device and the Security Fabric Settings section of a downstream FortiGate device are shown. When prompted to sign in with Security Fabric in the downstream FortiGate device, a user enters the AdminSSO credentials. What is the next status for the user?


- A. The user is prompted to create an SSO administrator account for AdminSSO.
- B. The user receives an authentication failure message.
- C. The user accesses the downstream FortiGate with super_admin_readonly privileges.
- D. The user accesses the downstream FortiGate with super_admin privileges.

Answer: C

NEW QUESTION 8

Refer to the exhibit, which shows the ADVPN network topology and partial BGP configuration.

ADVPN network topology

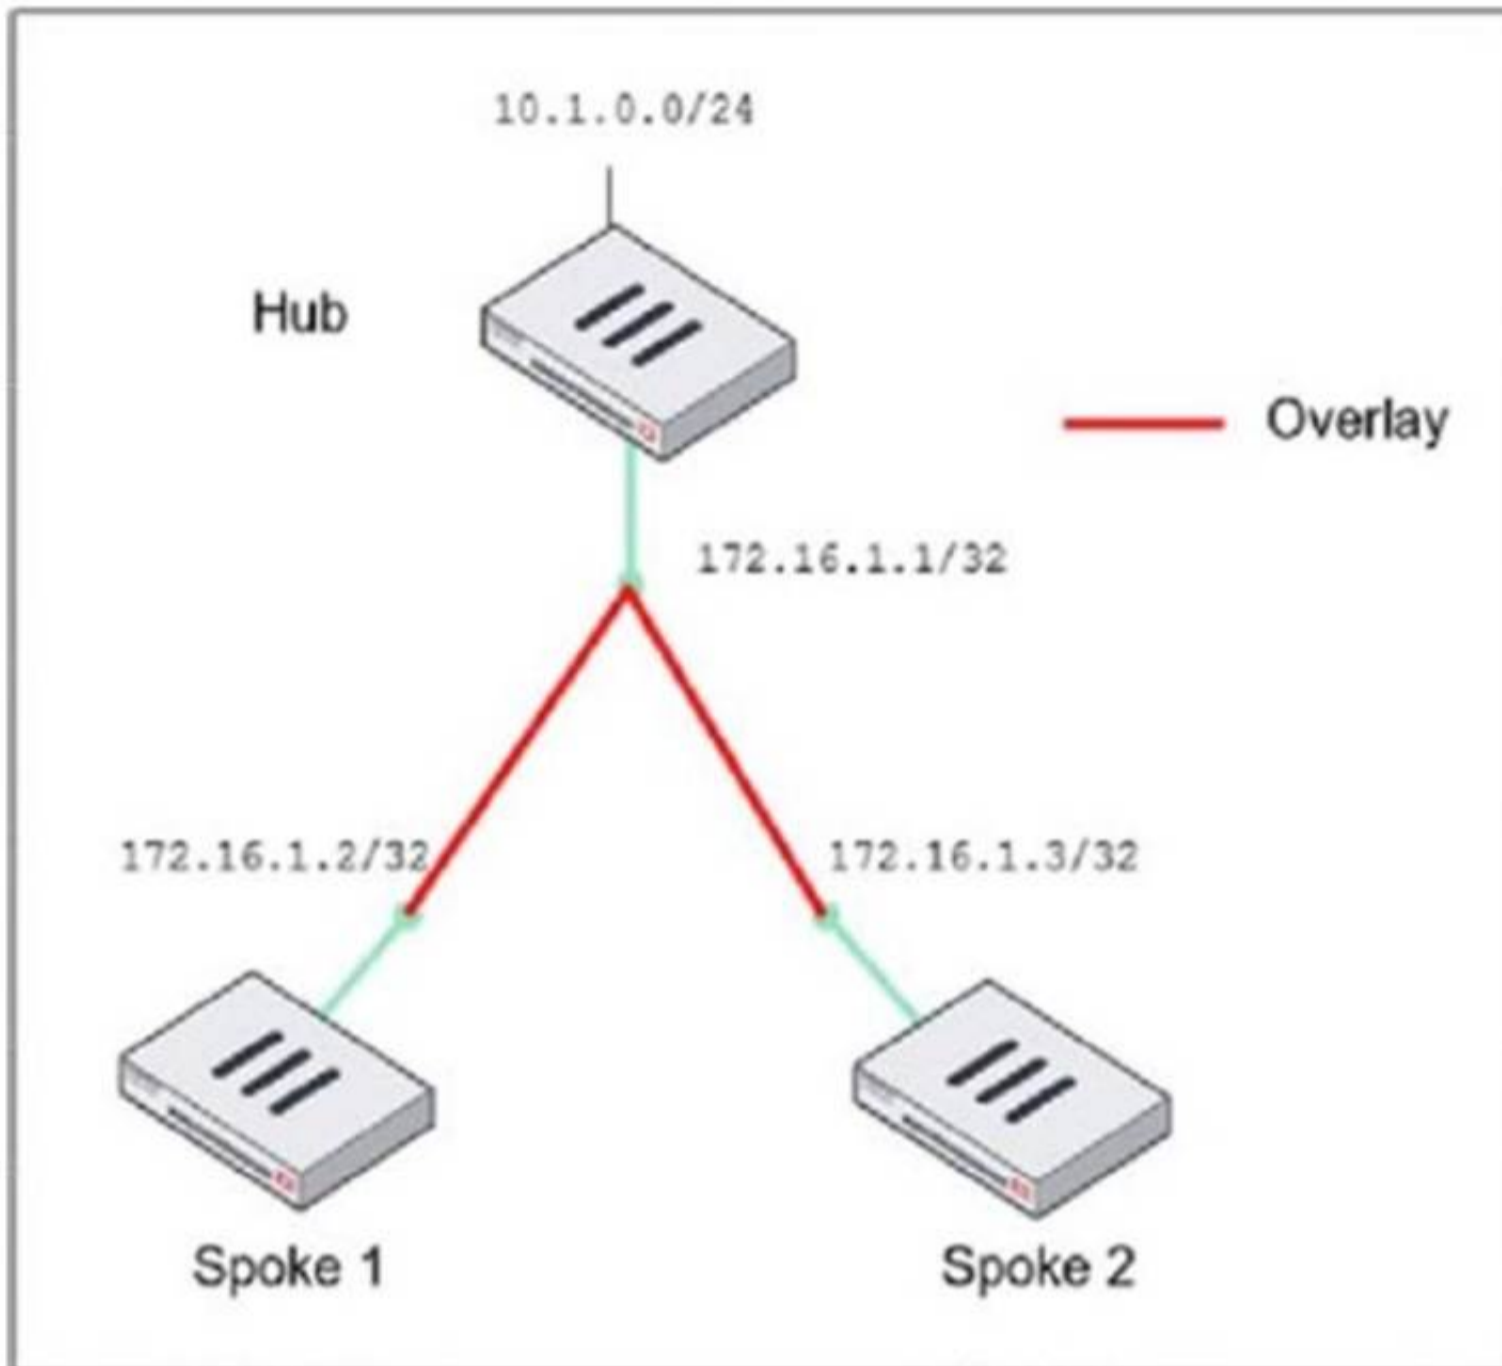

Partial BGP configuration

```

Hub # config router bgp
set as 65100
set router-id 172.16.1.1
config neighbor-group
  edit "advpn"
  set remote-as 65100
  ...
end
config neighbor-range
  edit 1
  end
config network
  ..
end
    
```

Which two parameters must an administrator configure in the config neighbor range for spokes shown in the exhibit? (Choose two.)


- A. set max-neighbor-num 2
- B. set neighbor-group advpn
- C. set route-reflector-client enable
- D. set prefix 172.16.1.0 255.255.255.0

Answer: BD

NEW QUESTION 9

Refer to the exhibits. The exhibits show a network topology, a firewall policy, and an SSL/SSH inspection profile configuration.

Network Topology

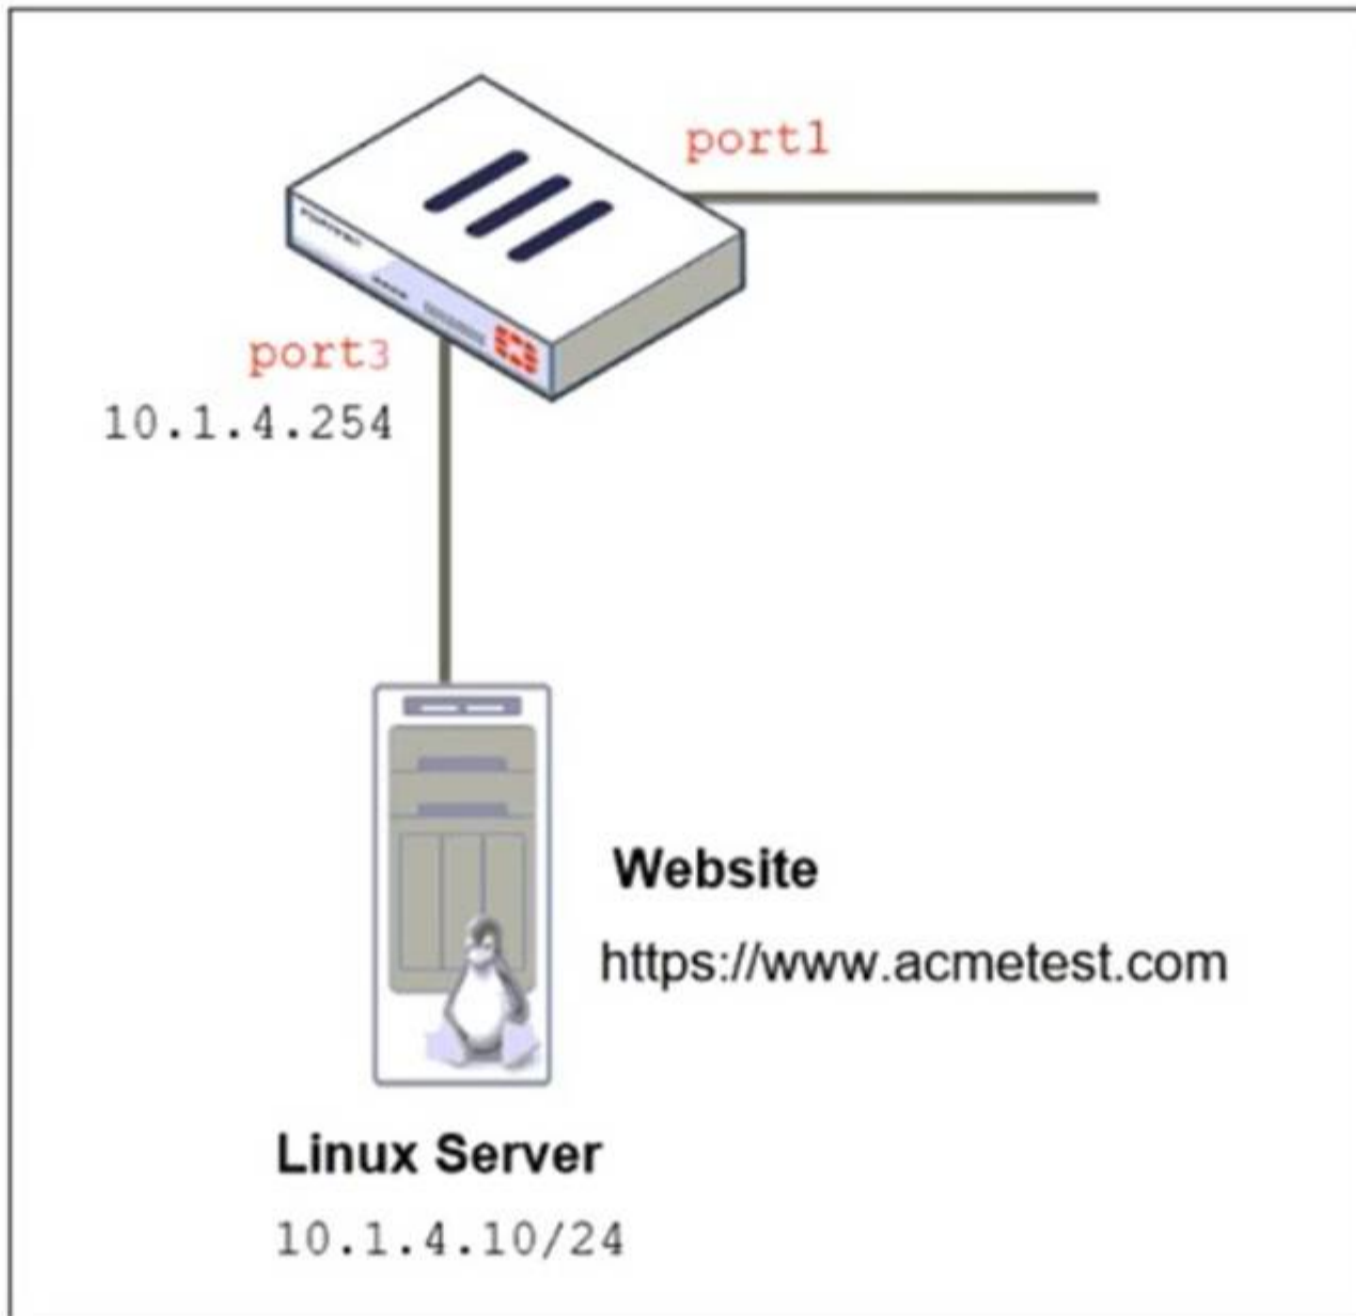

Firewall policy on FortiGate

```
DCFW # sh firewall policy 3
config firewall policy
edit 3
set name "To Linux Servers"
set uuid bf77d59e-5513-51ef-147d-e35066c267e9
set srcintf "port1"
set dstintf "port3"
set action accept
set srcaddr "all"
set dstaddr "10.1.4."
set schedule "always"
set service "ALL"
set utm-status enable
set inspection-mode proxy
set ssl-ssh-profile "deep-inspection"
set ips-sensor "IPS Monitor"
set logtraffic all
next
end
```

SSL/SSH inspection profile

Edit SSL/SSH Inspection Profile

Name

Comments 34/255

SSL Inspection Options

Enable SSL inspection of Multiple Client Connections Connecting to Multiple Servers

Inspection method Protecting SSL Server

CA certificate ⚠ Download

Blocked certificates i Allow Block View Blocked Certificates

Untrusted SSL certificates Allow Block Ignore View Trusted CAs List

Server certificate SNI check i Enable Strict Disable

Enforce SSL cipher compliance

Enforce SSL negotiation compliance

RPC over HTTPS

MAPI over HTTPS

Protocol Port Mapping

Inspect all ports

HTTPS	<input type="checkbox"/>	443
SMTS	<input checked="" type="checkbox"/>	465
POP3S	<input checked="" type="checkbox"/>	995
IMAPS	<input checked="" type="checkbox"/>	993
FTPS	<input checked="" type="checkbox"/>	990
DNS over TLS	<input type="checkbox"/>	853


Why is FortiGate unable to detect HTTPS attacks on firewall policy ID 3 targeting the Linux server?

- A. The administrator must set the policy to inspection mode to analyze the HTTPS packets as expected.
- B. The administrator must enable HTTPS in the protocol port mapping of the deep- inspection SSL/SSH inspection profile.
- C. The administrator must enable SSL inspection of the SSL server and upload the certificate of the Linux server website to the SSL/SSH inspection profile.
- D. The administrator must enable cipher suites in the SSL/SSH inspection profile to decrypt the message.

Answer: C

NEW QUESTION 10

Refer to the exhibit, which shows an enterprise network connected to an internet service provider.

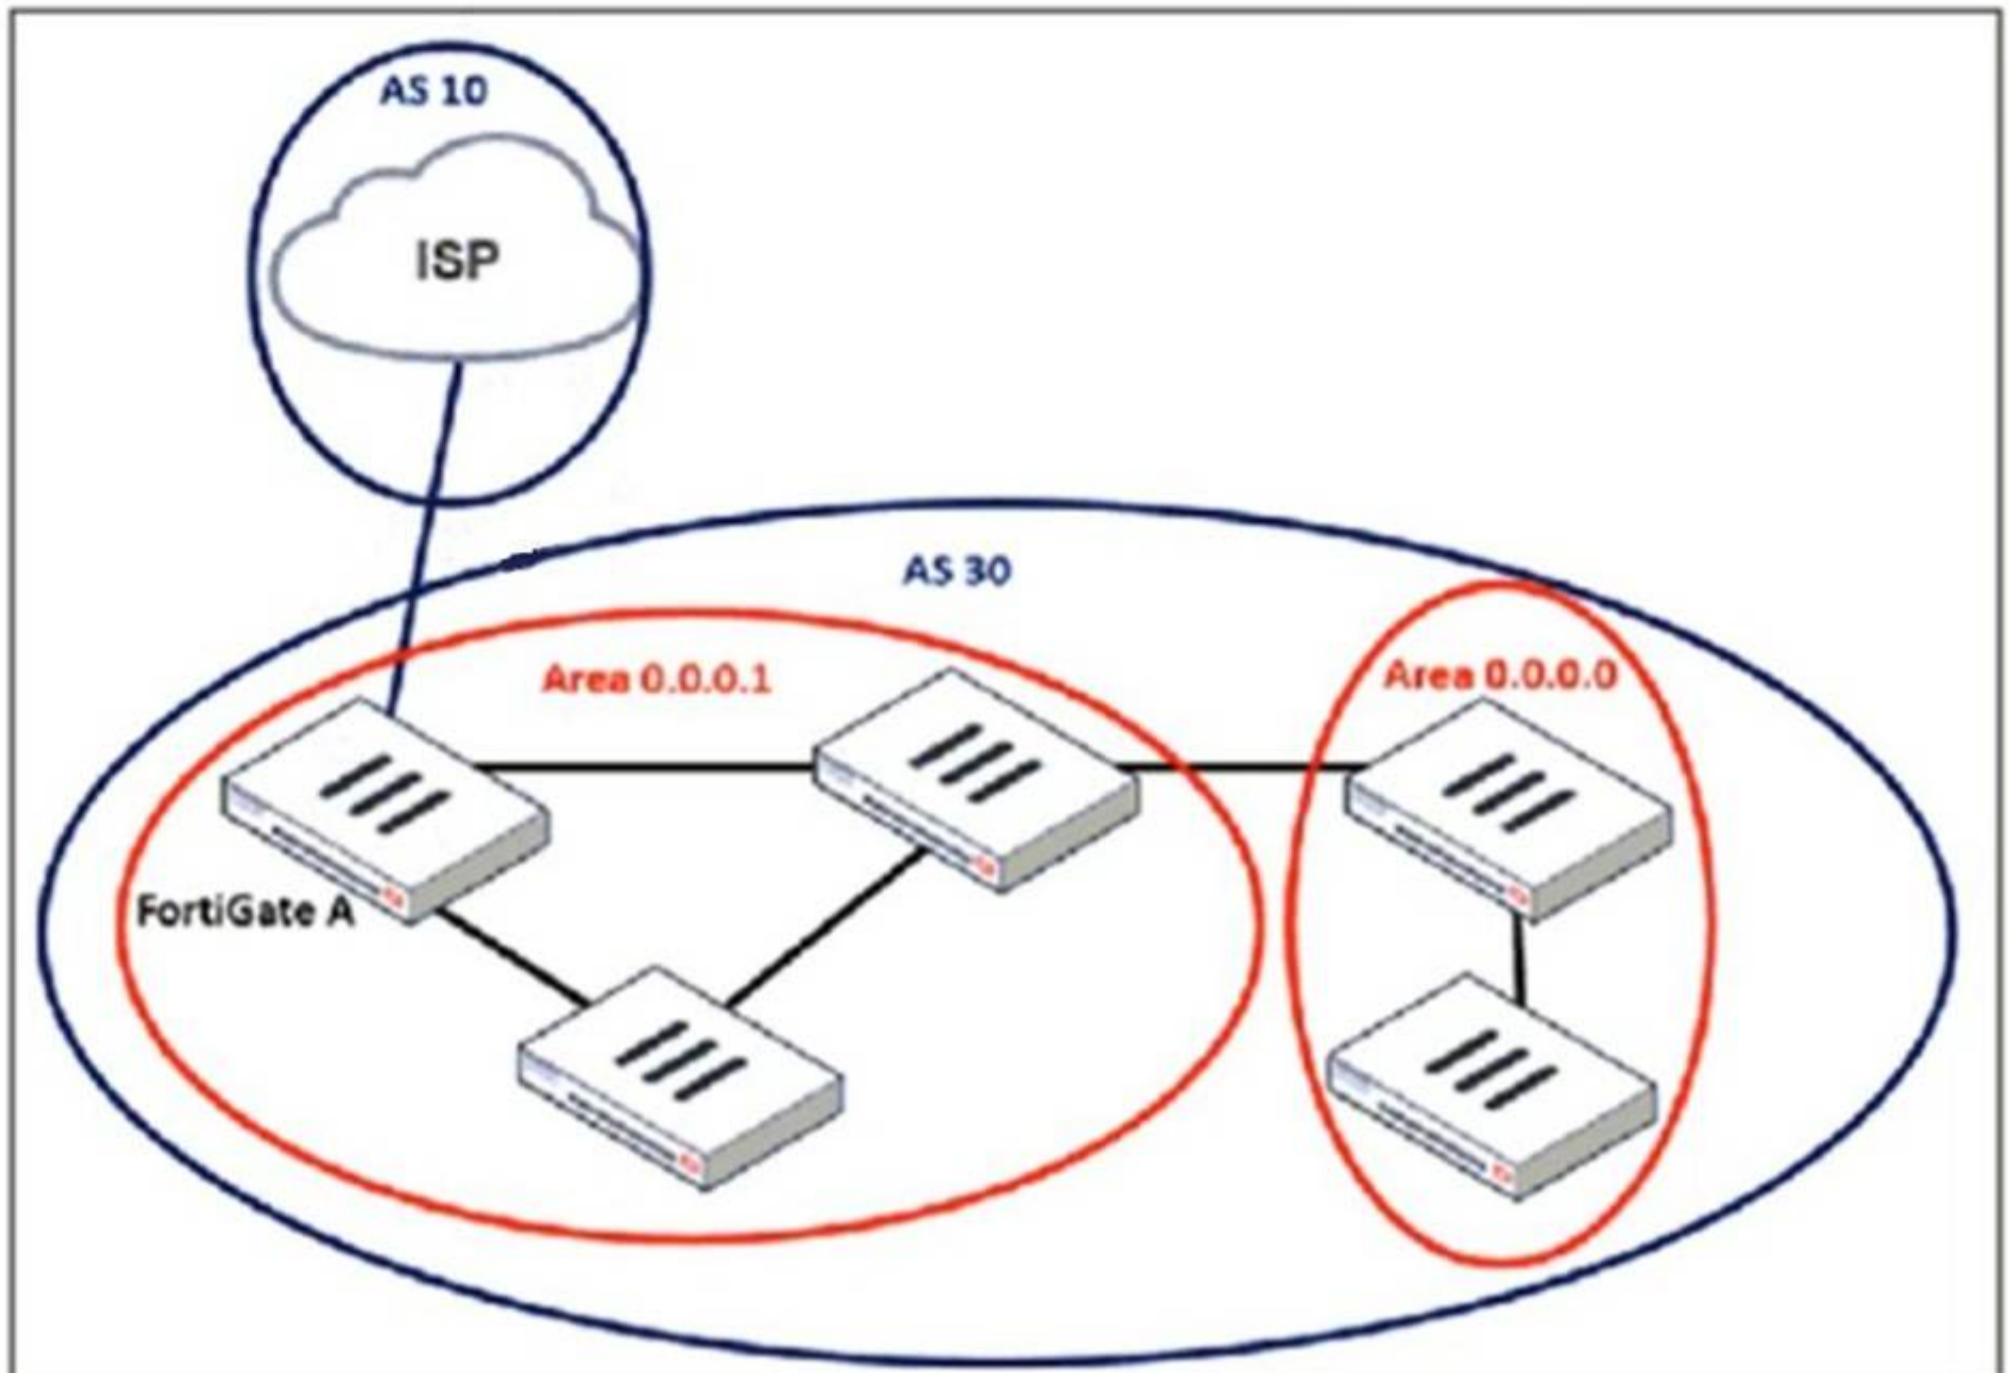

An administrator must configure a loopback as a BGP source to connect to the ISP. Which two commands are required to establish the connection? (Choose two.)

- A. ebgp-enforce-multihop
- B. update-source
- C. ibgp-enforce-multihop
- D. recursive-next-hop

Answer: AB

NEW QUESTION 10

A FortiGate device with UTM profiles is reaching the resource limits, and the administrator expects the traffic in the enterprise network to increase. The administrator has received an additional FortiGate of the same model. Which two protocols should the administrator use to integrate the additional FortiGate device into this enterprise network? (Choose two.)

- A. FGSP with external load balancers
- B. FGCP in active-active mode and with switches
- C. FGCP in active-passive mode and with VDOM disabled
- D. VRRP with switches

Answer: AB

NEW QUESTION 12

An administrator is designing an ADVPN network for a large enterprise with spokes that have varying numbers of internet links. They want to avoid a high number of routes and peer connections at the hub. Which method should be used to simplify routing and peer management?

- A. Deploy a full-mesh VPN topology to eliminate hub dependency.
- B. Implement static routing over IPsec interfaces for each spoke.
- C. Use a dynamic routing protocol using loopback interfaces to streamline peers and routes.
- D. Establish a traditional hub-and-spoke VPN topology with policy routes.

Answer: C

NEW QUESTION 16

An administrator must minimize CPU and RAM use on a FortiGate firewall while also enabling essential security features, such as web filtering and application control for HTTPS traffic. Which SSL inspection setting helps reduce system load while also enabling security features, such as web filtering and application control for encrypted HTTPS traffic?

- A. Use full SSL inspection to thoroughly inspect encrypted payloads.

- B. Disable SSL inspection entirely to conserve resources.
- C. Configure SSL inspection to handle HTTPS traffic efficiently.
- D. Enable SSL certificate inspection mode to perform basic checks without decrypting traffic.

Answer: D

NEW QUESTION 21

What is the initial step performed by FortiGate when handling the first packets of a session?

- A. Installation of the session key in the network processor (NP)
- B. Data encryption and decryption
- C. Security inspections such as ACL, HPE, and IP integrity header checking
- D. Offloading the packets directly to the content processor (CP)

Answer: C

NEW QUESTION 26

During the maintenance window, an administrator must sniff all the traffic going through a specific firewall policy, which is handled by NP6 interfaces. The output of the sniffer trace provides just a few packets.


Why is the output of sniffer trace limited?

- A. The traffic corresponding to the firewall policy is encrypted.
- B. auto-asic-off load is set to enable in the firewall policy,
- C. inspection-mode is set to proxy in the firewall policy.
- D. The option npudbg is not added in the diagnose sniff packet command.

Answer: B

NEW QUESTION 29

Refer to the exhibit, which shows a revision history window in the FortiManager device layer.

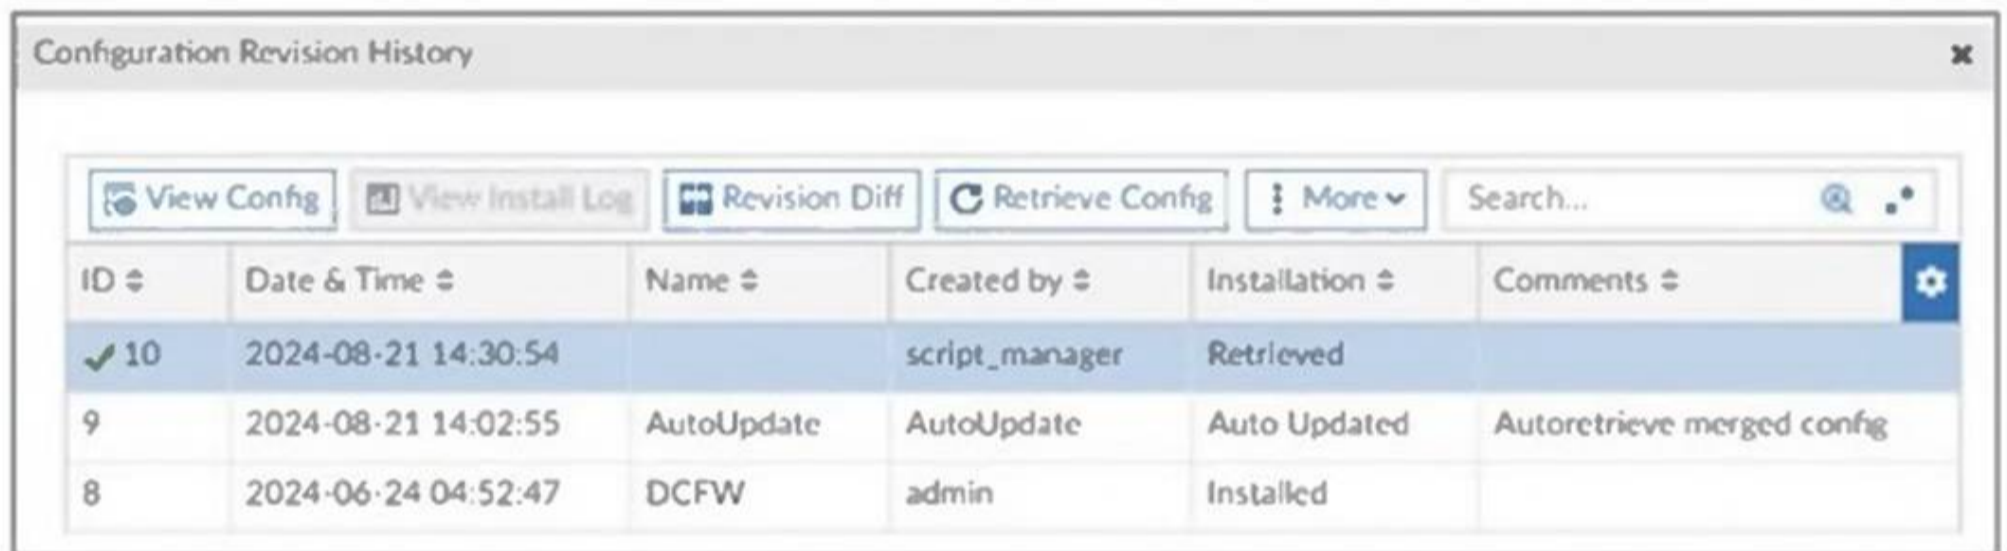

ID	Date & Time	Name	Created by	Installation	Comments
✓ 10	2024-08-21 14:30:54		script_manager	Retrieved	
9	2024-08-21 14:02:55	AutoUpdate	AutoUpdate	Auto Updated	Autoretrieve merged config
8	2024-06-24 04:52:47	DCFV	admin	Installed	

The IT team is trying to identify the administrator responsible for the most recent update in the FortiGate device database. Which conclusion can you draw about this scenario?

- A. This retrieved process was automatically triggered by a Remote FortiGate Directly (via CLI) script.
- B. The user script_manager is an API user from the Fortinet Developer Network (FDN) retrieving a configuration.
- C. To identify the user who created the event, check it on the Configuration and Installation widget on FortiGate within the FortiManager device layer.
- D. Find the user in the FortiManager system logs and use the type=script command to find the administrator user in the user field.

Answer: D

NEW QUESTION 33

A company that acquired multiple branches across different countries needs to install new FortiGate devices on each of those branches. However, the IT staff lacks sufficient knowledge to implement the initial configuration on the FortiGate devices.


Which three approaches can the company take to successfully deploy advanced initial configurations on remote branches? (Choose three.)

- A. Use metadata variables to dynamically assign values according to each FortiGate device.
- B. Use provisioning templates and install configuration settings at the device layer.
- C. Use the Global ADOM to deploy global object configurations to each FortiGate device.
- D. Apply Jinja in the FortiManager scripts for large-scale and advanced deployments.
- E. Add FortiGate devices on FortiManager as model devices, and use ZTP or LTP to connect to FortiGate devices.

Answer: ABE

NEW QUESTION 34

Refer to the exhibit, which shows an ADVPN network.

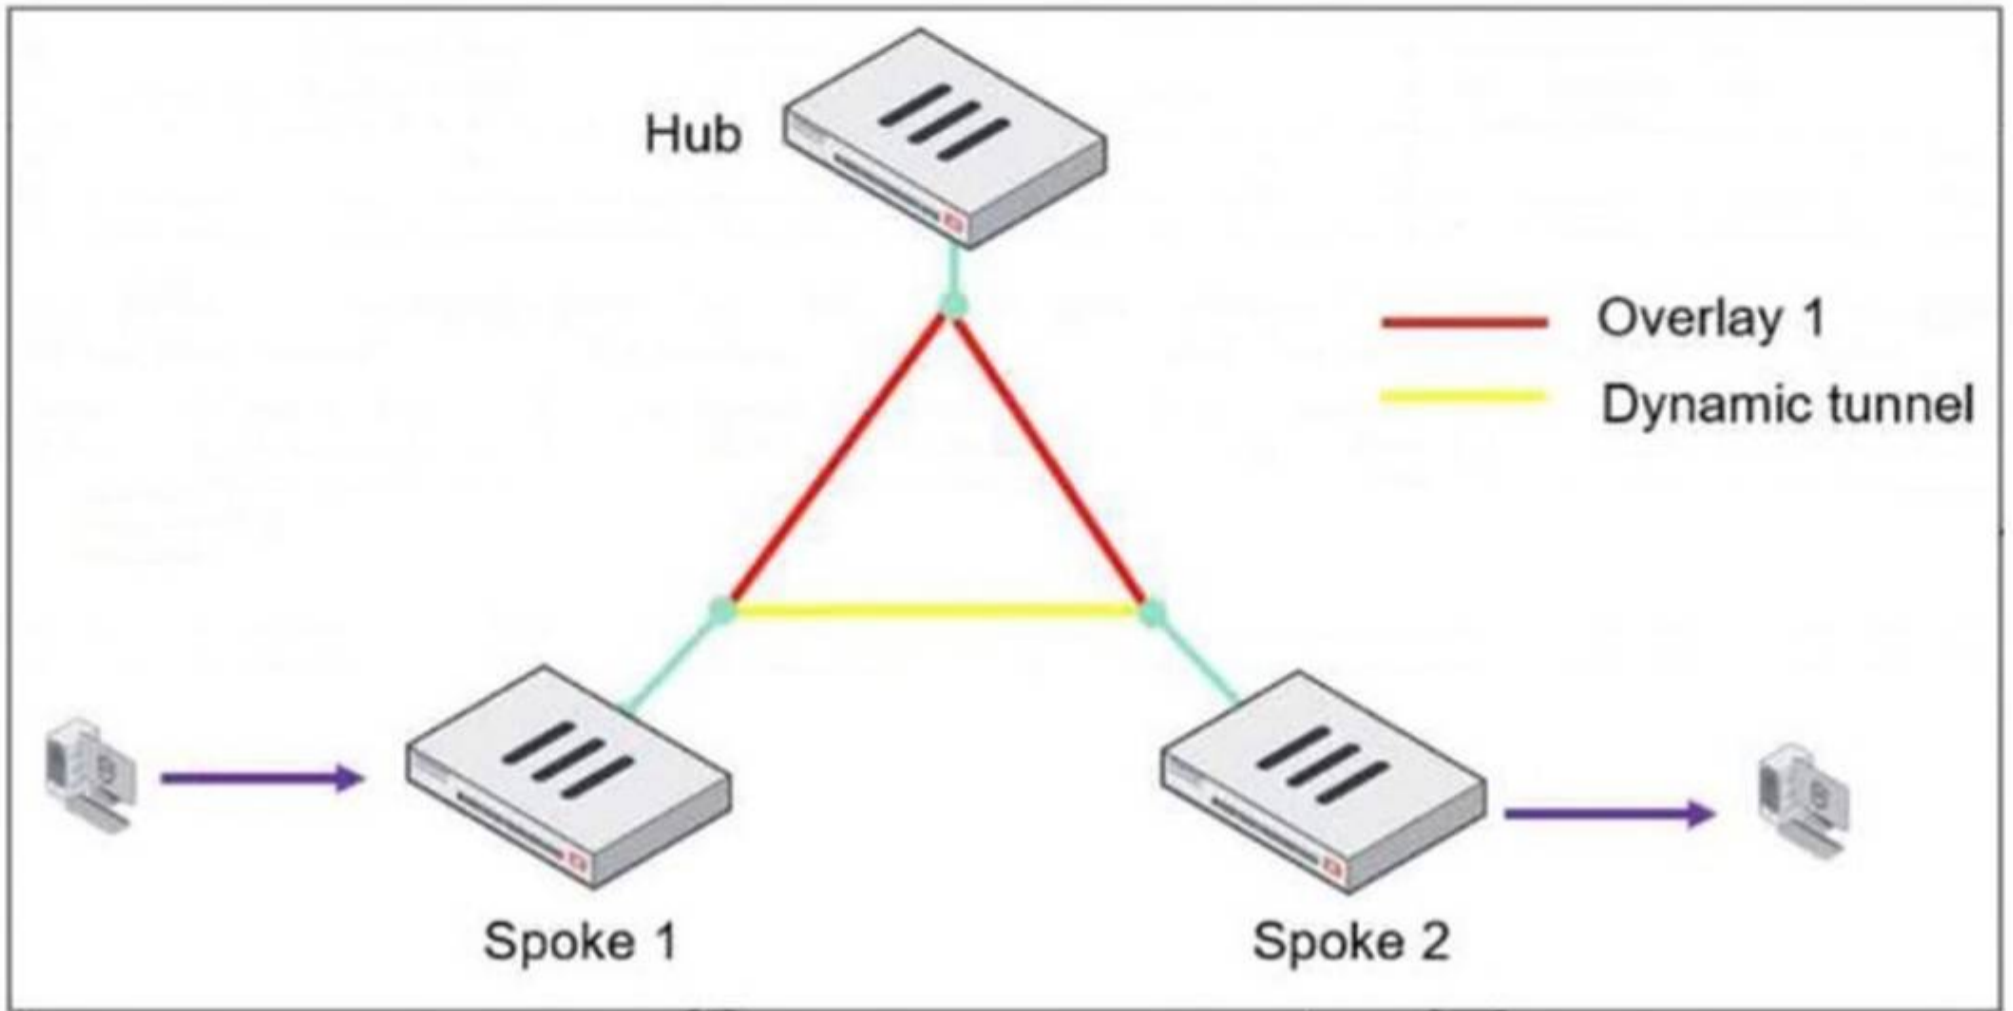

The client behind Spoke-1 generates traffic to the device located behind Spoke-2.
 What is the first message that the hub sends to Spoke-1 to bring up the dynamic tunnel?

- A. Shortcut query
- B. Shortcut offer
- C. Shortcut reply
- D. Shortcut forward

Answer: B

NEW QUESTION 36

Refer to the exhibit, which shows the packet capture output of a three-way handshake between FortiGate and FortiManager Cloud.

Packet capture output of three-way handshake between a FortiGate and a FortiManager Cloud

```

> Frame 35: 1034 bytes on wire (8272 bits), 1034 bytes captured (8272 bits) on interface -, id 0
> Ethernet II, Src: 50:e5:d5: (50:e5:d5: ), Dst: Fortinet_ (e0:23:ff: )
> Internet Protocol Version 4, Src: 192.168.2.60, Dst: 154.52.4.164
> Transmission Control Protocol, Src Port: 16304, Dst Port: 541, Seq: 1, Ack: 1, Len: 980
▼ Transport Layer Security
  ▼ TLSv1.3 Record Layer: Handshake Protocol: Client Hello
    Content Type: Handshake (22)
    Version: TLS 1.0 (0x0301)
    Length: 975
  ▼ Handshake Protocol: Client Hello
    Handshake Type: Client Hello (1)
    Length: 971
  > Version: TLS 1.2 [0x0303]
    Random: a14f6c4b8f9313bf
    Session ID Length: 32
    Session ID: a0de426e96e83a5
    Cipher Suites Length: 34
  > Cipher Suites (17 suites)
    Compression Methods Length: 1
  > Compression Methods (1 method)
    Extensions Length: 864
  ▼ Extension: server_name (len=45) name=9398.support.fortinet-ca2.fortinet.com
    Type: server_name (0)
    Length: 45
  ▼ Server Name Indication extension
    Server Name list length: 43
    Server Name Type: host_name (0)
    Server Name length: 40
    Server Name: 9398.support.fortinet-ca2.fortinet.com
  > Extension: ec_point_formats (len=4)
  > Extension: supported_groups (len=22)
  > Extension: session_ticket (len=0)
  > Extension: encrypt_then_mac (len=0)
  > Extension: extended_master_secret (len=0)
  > Extension: signature_algorithms (len=48)
  > Extension: supported_versions (len=9) TLS 1.3, TLS 1.2, TLS 1.1, TLS 1.0
  > Extension: psk_key_exchange_modes (len=2)
  
```

What two conclusions can you draw from the exhibit? (Choose two.)

- A. FortiGate will receive a certificate that supports multiple domains because FortiManager operates in a cloud computing environment.
- B. FortiGate is connecting to the same IP server and will receive an independent certificate for its connection between FortiGate and FortiManager Cloud.
- C. If the TLS handshake contains 17 cipher suites it means the TLS version must be 1.0 on this three-way handshake.
- D. The wildcard for the domain *.fortinet-ca2.support.fortinet.com must be supported by FortiManager Cloud.

Answer: D

NEW QUESTION 38

Refer to the exhibit.

Routing table on FortiGate_A

```
FortiGate_A # get router info routing-table all
Codes: K - kernel, C - connected, S - static, R - RIP, B - BGP
O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
V - BGP VPNv4
* - candidate default

Routing table for VRF=0
S* 0.0.0.0/0 [10/0] via 10.1.0.254, port1, [1/0]
C 10.1.0.0/24 is directly connected, port1
C 10.1.4.0/24 is directly connected, port3
B 100.64.1.0/24 [200/0] via 10.1.0.254 (recursive is directly connected, port1), 00:39:45, [1/0]
B 172.16.1.252/30 [200/0] via 10.1.0.1 (recursive is directly connected, port1), 00:42:48, [1/0]
C 172.16.100.0/24 is directly connected, port8
```

Routing table on FortiGate_B

```
FortiGate_B # get router info routing-table all
Codes: K - kernel, C - connected, S - static, R - RIP, B - BGP
O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
V - BGP VPNv4
* - candidate default

Routing table for VRF=0
S* 0.0.0.0/0 [10/0] via 10.1.0.254, port1, [1/0]
S 4.2.2.2/32 [10/0] via 10.1.5.254, port4, [1/0]
C 10.1.0.0/24 is directly connected, port1
B 10.1.4.0/24 [200/0] via 10.1.0.100 (recursive is directly connected, port1), 00:41:02, [1/0]
C 10.1.5.0/24 is directly connected, port4
B 100.64.1.0/24 [200/0] via 10.1.0.254 (recursive is directly connected, port1), 00:38:14, [1/0]
C 172.16.1.248/30 is directly connected, C0
C 172.16.1.252/30 is directly connected, A0
C 172.16.100.0/24 is directly connected, port8
```

The routing tables of FortiGate_A and FortiGate_B are shown. FortiGate_A and FortiGate_B are in the same autonomous system. The administrator wants to dynamically add only route 172.16.1.248/30 on FortiGate_A. What must the administrator configure?

- A. The prefix 172.16.1.248/30 in the BGP Networks section on FortiGate_B
- B. A BGP route map out for 172.16.1.248/30 on FortiGate_B
- C. Enable Redistribute Connected in the BGP section on FortiGate_B.
- D. A BGP route map in for 172.16.1.248/30 on FortiGate_A

Answer: B

NEW QUESTION 43

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

FCSS_EFW_AD-7.6 Practice Exam Features:

- * FCSS_EFW_AD-7.6 Questions and Answers Updated Frequently
- * FCSS_EFW_AD-7.6 Practice Questions Verified by Expert Senior Certified Staff
- * FCSS_EFW_AD-7.6 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * FCSS_EFW_AD-7.6 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The FCSS_EFW_AD-7.6 Practice Test Here](#)