

Cisco

Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)



NEW QUESTION 1

Which feature allows firewall ACLs to be configured automatically when new endpoints are attached to an EPG?

- A. ARP gleaning
- B. dynamic endpoint attach
- C. hardware proxy
- D. network-stitching

Answer: B

NEW QUESTION 2

An engineer is implementing Cisco ACI at a large platform-as-a-service provider using APIC controllers, 9396PX leaf switches, and 9336PQ spine switches. The leaf switch ports are configured as IEEE 802.1p ports. Where does the traffic exit from the EPG in IEEE 802.1p mode in this configuration?

- A. from leaf ports tagged as VLAN 0
- B. from leaf ports untagged
- C. from leaf ports tagged as VLAN 4094
- D. from leaf ports tagged as VLAN 1

Answer: A

NEW QUESTION 3

What must be enabled in the bridge domain to have the endpoint table learn the IP addresses of endpoints?

- A. L2 unknown unicast: flood
- B. GARP based detection
- C. unicast routing
- D. subnet scope

Answer: C

Explanation:

Reference: <https://hsvglobalschool.in/dhkycw/cisco-aci-bridge-domain.html>

NEW QUESTION 4

An engineer is extending EPG connectivity to an external network. The external network houses the Layer 3 gateway and other end hosts. Which ACI bridge domain configuration should be used?

- A. Forwarding: CustomL2 Unknown Unicast: Hardware Proxy L3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Enabled
- B. Forwarding: Custom L2 Unknown Unicast: FloodL3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Enabled
- C. Forwarding: CustomL2 Unknown Unicast: Hardware Proxy L3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Disabled
- D. Forwarding: Custom L2 Unknown Unicast: FloodL3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Disabled

Answer: D

NEW QUESTION 5

Which action sets Layer 2 loop migration in an ACI Fabric with a Layer 2 Out configured?

- A. Enable MCP on the ACI fabric.
- B. Disable STP in the external network.
- C. Disable STP on the ACI fabric.
- D. Enable STP on the ACI fabric.

Answer: A

NEW QUESTION 6

An engineer is implementing a connection that represents an external bridged network. Which two configurations are used? (Choose two.)

- A. Layer 2 remote fabric
- B. Layer 2 outside
- C. Layers 2 internal
- D. Static path binding
- E. VXLAN outside

Answer: AB

NEW QUESTION 7

Regarding the MTU value of MP-BGP EVPN control plane packets in Cisco ACI, which statement about communication between spine nodes in different sites is true?


- A. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- B. As a result, the Inter-Site network should be able to carry 9000-bytes packets.

- C. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- D. As a result, the Inter-Site network should be able to carry 1800-bytes packets.
- E. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- F. As a result, the Inter-Site network should be able to carry 1500-bytes packets.
- G. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- H. As a result, the Inter-Site network should be able to carry 9100-bytes packets.

Answer: D

NEW QUESTION 8

Refer to the exhibit.

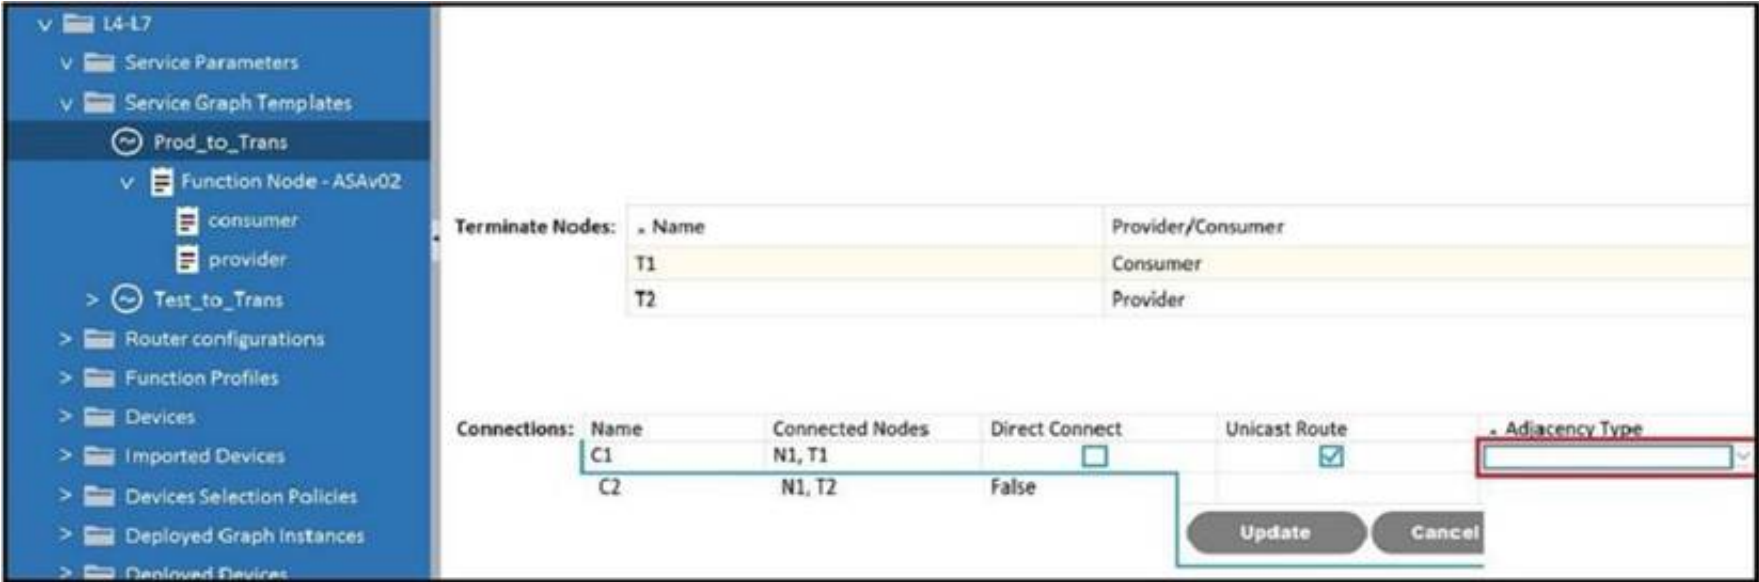


Which Adjacency Type value should be set when the client endpoint and the service node interface are in a different subnet?

- A. Routed
- B. Unicast
- C. L3Out
- D. L3

Answer: D

NEW QUESTION 9

Refer to the exhibit.

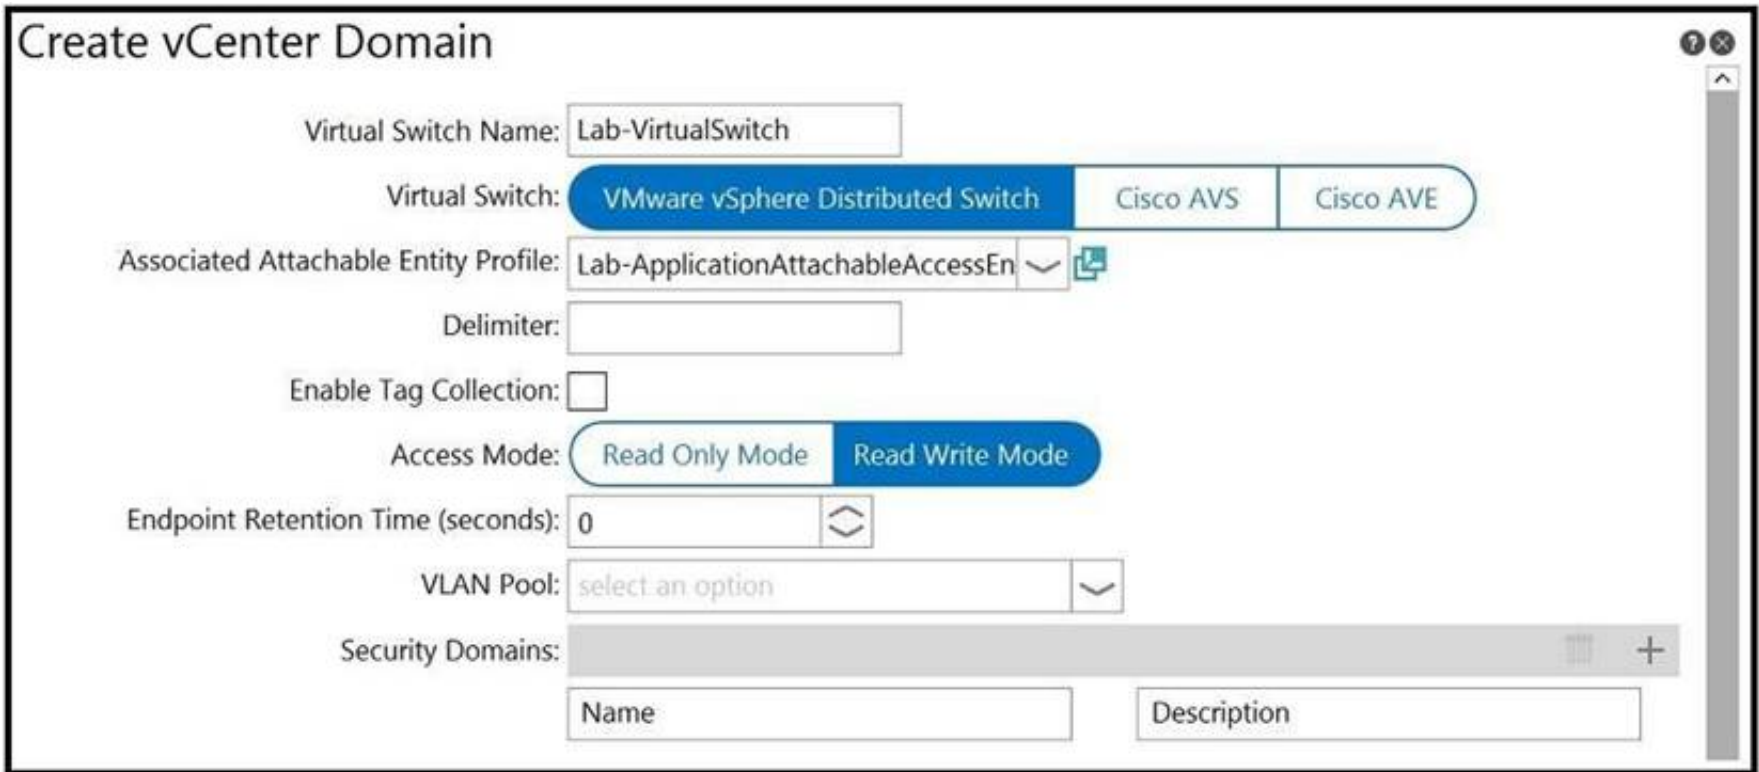

An engineer is integrating a VMware vCenter with Cisco ACI VMM domain configuration. ACI creates port-group names with the format of “Tenant | Application | EPG”. Which configuration option is used to generate port groups with names formatted as “Tenant=Application=EPG”?

- A. enable tag collection
- B. security domains
- C. delimiter
- D. virtual switch name

Answer: D

NEW QUESTION 10

Refer to the exhibit.

Create vCenter Domain

vCenter Credentials:

Profile name	Username	Description
Lab-VCenter	admin	

vCenter:

Name	IP	Type	Stats Collection
Lab-VCenter	vcenter.aci.lab	vCenter	Disabled

Port Channel Mode:

select a value

Static Channel – Mode On

LACP Active

LACP Passive

MAC Pinning+

MAC Pinning-Physical-NIC-load

Cancel

Submit

An engineer is implementing Cisco ACI – VMware vCenter integration for a blade server that lacks support of bonding. Which port channel mode results in “route based on originating virtual port” on the VMware VDS?

- A. Static Channel – Mode On
- B. MAC Pinning-Physical-NIC-load
- C. LACP Passive
- D. MAC Pinning+
- E. LACP Active

Answer: D

NEW QUESTION 10

DRAG DROP

Drag and drop the Cisco ACI Layer 4 to Layer 7 service insertion terms on the left to the correct descriptions on the right.

concrete interfaces	ensures reachability between L3 domains
service graph	rendered with local resources that are available in the fabric
device cluster	contains an active-standby pair of firewalls or load balancers
VRF stitching	encapsulations programmed based on their association with logical interfaces

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

concrete interfaces	VRF stitching
service graph	service graph
device cluster	device cluster
VRF stitching	concrete interfaces

NEW QUESTION 11

Which new construct must a user create when configuring in-band management?

- A. VLAN pool
- B. management contract

- C. management tenant
- D. bridge domain

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html

NEW QUESTION 16

A data center administrator is upgrading an ACI fabric. There are 3 APIC controllers in the fabric and all the servers are dual-homed to pairs of leaf switches configured in VPC mode. How should the fabric be upgraded to minimize possible traffic impact during the upgrade?

- A. * 1. Create two maintenance groups for the APIC controllers: VPC left and VPC right.* 2. Upgrade the first group of controllers.* 3. Upgrade the second group of controllers.* 4. Upgrade the leaf switches.
- B. * 1. Create two maintenance groups for APIC controllers: VPC left and VPC right.* 2. Upgrade the leaf switches.* 3. Upgrade the first group of controllers.* 4. Upgrade the second group of controllers.
- C. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the APIC controllers.* 3. Upgrade the first group of leaf switches.* 4. Upgrade the second group of leaf switches.
- D. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the first group of switches.* 3. Upgrade the second group of switches.* 4. Upgrade the APIC controllers.

Answer: D

NEW QUESTION 19

Which protocol does ACI use to securely sync the configuration in a remote location?

- A. SCP
- B. HTTPS
- C. TFTP
- D. FTP

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Using_Import_Export_to_Recover_Config_States.html

NEW QUESTION 22

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)