

Avaya

Exam Questions 75940X

Avaya Converged Platform Integration Exam



NEW QUESTION 1

With ACP 4200, what is mandatory to ensure Avaya Aura® High Availability across the two Data Centers?

- A. A single vCenter Server that manages both Data Centers.
- B. Network connectivity to and in between the two Data Centers.
- C. Identical compute servers in both Data Centers.
- D. The same VLANs in both Data Centers.

Answer: A

NEW QUESTION 2

The Storage dashlet contains a view of the status of the Host and Services related to the Storage. By default, in which two places can this dashlet be viewed in Avaya Orchestrator? (Choose two.)

- A. The Service Status View
- B. The Home Dashboard
- C. The Host Status View
- D. The Storage Dashboard
- E. The Rack View

Answer: AB

NEW QUESTION 3

How can the administrator check the status of all services being monitored by Avaya Orchestrator?

- A. It is not possible.
- B. Services are displayed on a per-Host basis only.
- C. By navigating to Quick View-All Service Problems.
- D. By navigating to Details-Service Status.
- E. By navigating to ACP 4200 Configuration Wizard-Service.

Answer: B

NEW QUESTION 4

Using VMware networking in ACP 4200, how are Virtual NICs mapped to physical NICs?

- A. Via DRS rules
- B. On a 1-to-1 basis
- C. Via Virtual Switches and Port Groups
- D. Via the VNIIC mapping tables

Answer: D

NEW QUESTION 5

Which three examples of hardware equipment redundancy are built into the ACP 4200? (Choose three.)

- A. Redundant iLO connections to each HP server.
- B. Redundant storage processors in the storage arrays.
- C. Redundant hot swap switch CPU modules.
- D. Redundant power supplies in all hardware components.
- E. Redundant pairs of Power Distribution Units.

Answer: ACE

NEW QUESTION 6

Refer to the exhibit.

«

Services

vSphere DRS

vSphere HA

Virtual SAN

General

Disk Management

Configuration

General

Virtual SAN Licensing

VMware EVC

DRS Groups

DRS Rules

VM Overrides

Host Options




Profiles

DRS Rules

Add...

Edit...

Delete

Name	Type	Enabled	Conflicts	Defined...
 SMRule	Separate Virtual Machines	Yes	0	User
 MSCRule	Run VMs on Hosts	Yes	0	User
 CMRule	Separate Virtual Machines	Yes	0	User



DRS Rule Details

The listed 2 Virtual Machines must run on different hosts.

Add...

Details...

Remove

Rule Members	Conflicts
 SC-Avaya Aura Session Ma...	0
 SC-Avaya Aura Session Ma...	0

Conflicts

What is the purpose of the “SMRule” DRS rule that states the two Avaya Aura® Session Managers must run off different ESXi hosts?

- A. To improve the latency of DRS load-balancing
- B. To prevent a single ESXi host from being overloaded with SIP traffic
- C. To preserve seamless failover/recovery across primary and secondary Session Managers
- D. To reduce the memory and CPU load on a single ESXi host

Answer: C

NEW QUESTION 7


What is the purpose of VMware vMotion as used in ACP 4200?

- A. It enables an operational virtual machine to migrate from one ESXi host to another, which includes its running state and storage.
- B. It dynamically allocated and balances computing capacity across the logical resource pools.
- C. It provides monitoring of operating system and hardware failures, and also restarts virtual machines on other hosts within the resource pool.
- D. It creates a pool of virtual disk space that can be shared by multiple virtual machines.

Answer: A

NEW QUESTION 8

Refer to the exhibit.

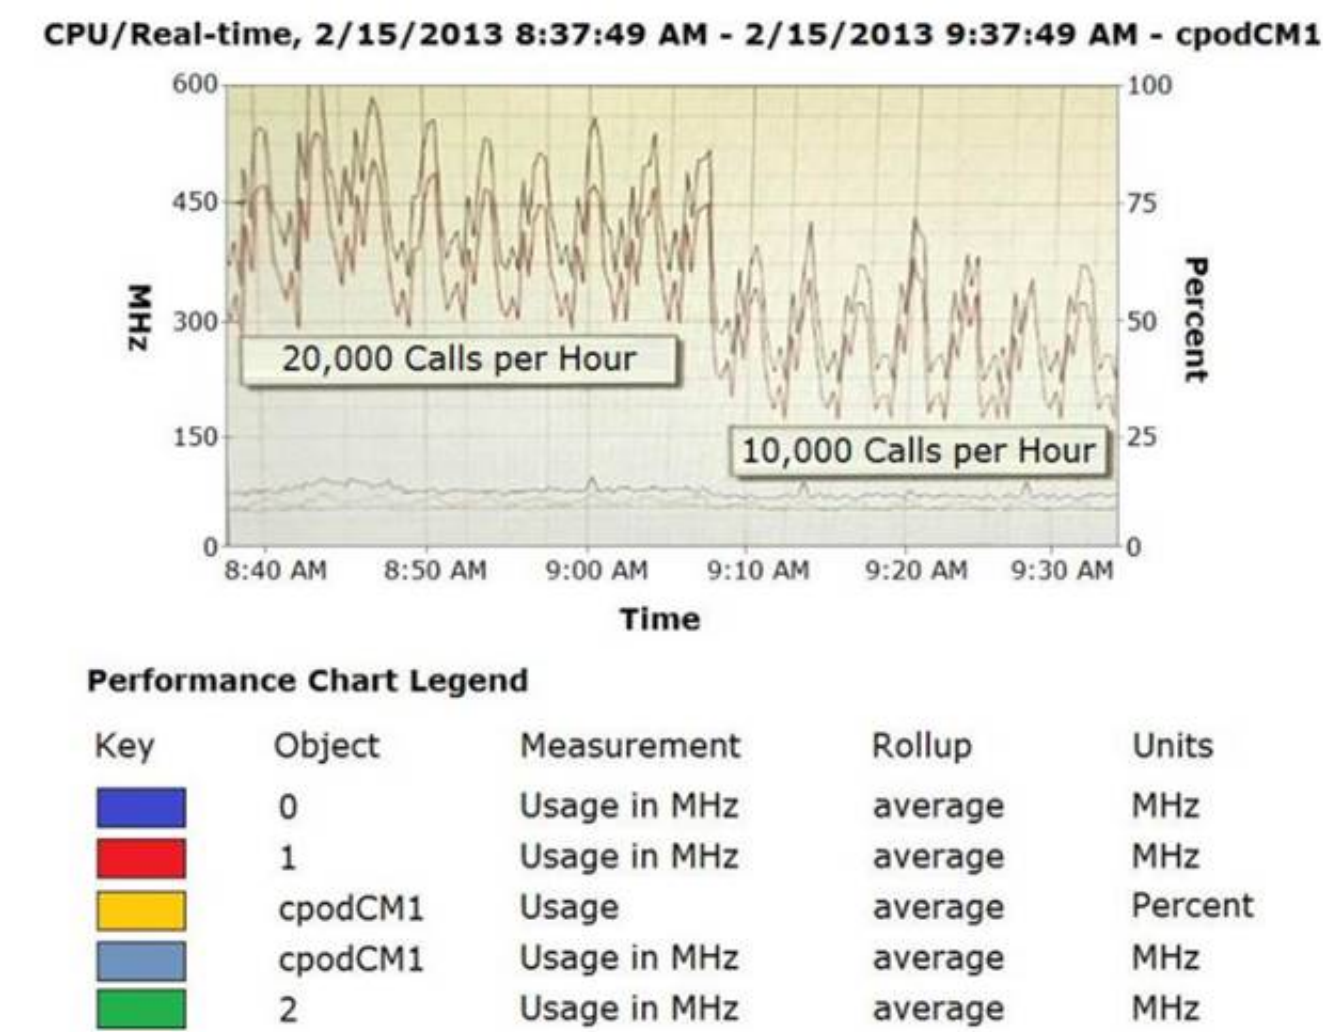

The CPU performance of Communication Manager (CM) shows a significant difference depending on the call rates. Which statement about making configuration changes is true?

- A. Increasing the number of Virtual CPUs allocated to CM might help to reduce this difference.
- B. Ensuring that a secondary CM is available to allow for load-balancing might help to reduce this difference.
- C. Migrating the CM Virtual Machine to another ESXi host that is less busy might help to reduce this difference.
- D. Reducing this difference is not necessary because this is expected behavior.

Answer: B

NEW QUESTION 9

An engineering implementation team has been asked to install an ACP 4200. Which task related to the Avaya Orchestrator is completed during the installation by the implementation team?

- A. Deploy the Rack and Device Dashboards.
- B. Install Avaya Orchestrator.
- C. Run the ACP Configuration Wizard.
- D. Power on the Avaya Orchestrator virtual machine.

Answer: B

NEW QUESTION 10

An administrator is examining the Hosts monitored by Avaya Orchestrator. Which two are examples of these Hosts? (Choose two.)

- A. Storage Devices
- B. vCenter Server Appliance
- C. Network Switches
- D. System Manager

Answer: AC

NEW QUESTION 10

Refer to the exhibit.



An administrator notices that the Rack View of Avaya Orchestrator is highlighted with a Red X on the graphical representation of the rack. What does this indicate?

- A. At least 50% of the hosts in the rack contain a service which is in critical state.
- B. The rack has a front door that is currently unlocked.
- C. The rack is currently unreachable.
- D. At least one of the hosts in the rack contains a service which is in critical state.

Answer: D

NEW QUESTION 12

When new VMs are added the ACP 4200, which action is mandatory?

- A. The new VMs must be configured to send SNMP Traps to Avaya Orchestrator.
- B. CPU and Memory reservations must be manually configured to the application recommendations for the new VMs.

- C. Avaya Orchestrator must be configured to recognize the new VMs.
- D. ACP Configurator Tool must be used to calculate resource availability for the ACP to support the new VMs.

Answer: A

NEW QUESTION 13

Which application can a technician use to remotely connect to the Management Server Console on an ACP 4200?

- A. VNC
- B. Remote Desktop Connection
- C. PuTTY
- D. Team Viewer

Answer: B

NEW QUESTION 16

Refer to the exhibit.



Which Avaya Session Border Controller for Enterprise (ASBCE) configuration option is shown?

- A. High Availability
- B. Hybrid
- C. Geographic Redundancy
- D. Two-wire

Answer: A

NEW QUESTION 18

Avaya Orchestrator monitors the ACP 4200 components by organizing them into which two groups? (Choose two.)

- A. Power
- B. Virtual Machines
- C. Storage
- D. Applications

Answer: AC

NEW QUESTION 19


What is a benefit of using Virtual Router Redundancy Protocol (VRRP) on the VSP switches in the ACP 4200?

- A. It creates virtual Layer 2 connections for the VMs.
- B. It allows you to connect to the switches for management access.
- C. It ensures the end systems do not need to change their gateway IP address in the event of a fail-over.
- D. It allows the end systems to automatically change their gateway IP address in the event of a fail-over.

Answer: D

NEW QUESTION 23

Refer to the exhibit.

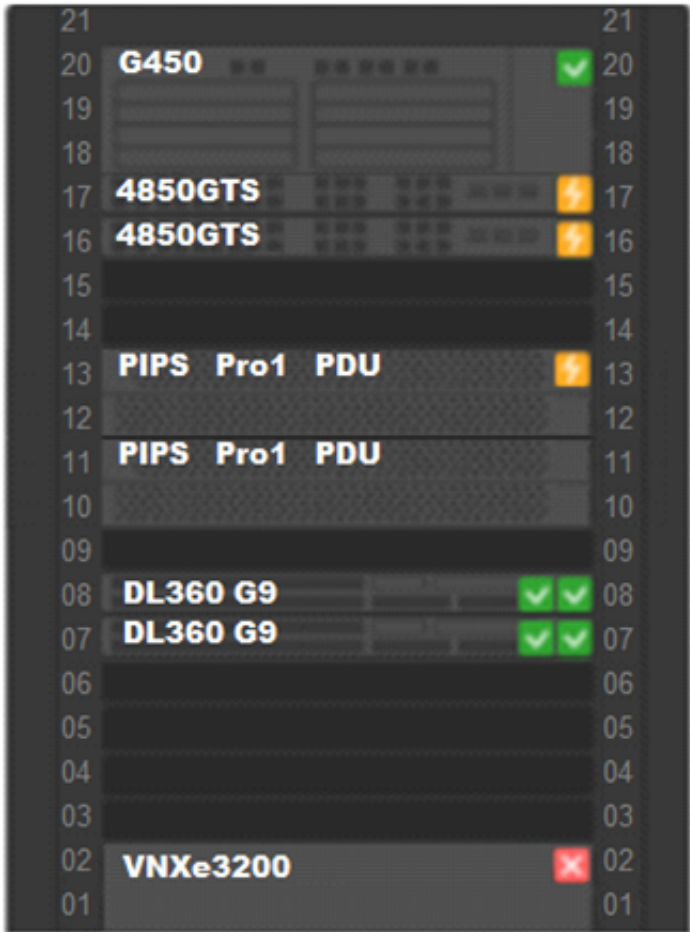

An administrator navigates to the Avaya Orchestrator page shown in the exhibit. The 4850GTS switches and the PIPS Pro1 PDUs are displaying an Orange status icon.
What does this indicate?

- A. These devices have not been configured with correct credentials.
- B. These devices have power supply issues.
- C. These devices have services with status of warning.
- D. These devices have reachability issues.

Answer: C

NEW QUESTION 24

Refer to the exhibit.




Why is the usage measurement of CPU2 (in Purple) shown in the chart highlighted in the table?

- A. Because the CPU2 has been nominated as the primary CPU in this Virtual Machine.
- B. Because the CPU2 has been highlighted with an active alarm.
- C. Because the CPU2 usage is closest to the average usage of all the CPUs.
- D. Because the CPU2 has been selected in the table under the chart.

Answer: D

NEW QUESTION 28

Refer to the exhibit.

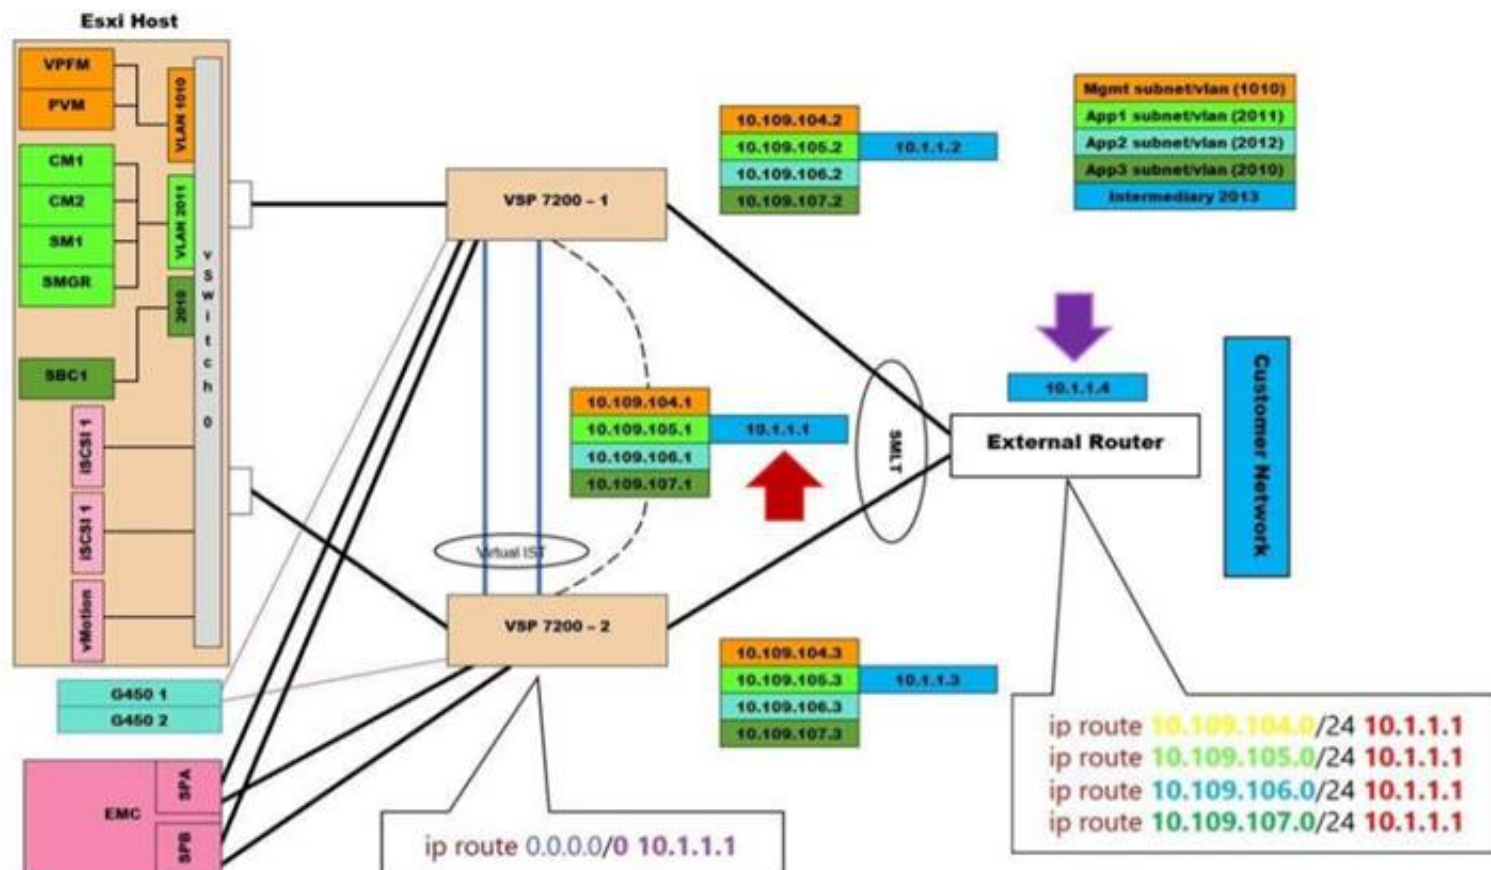

What does the IP address 10.1.1.1 represent?

- A. The IP address of the EMC storage
- B. The SMLT IP address of the two VSP 7200 switches
- C. The Virtual IST IP address of the two VSP 7200 switches
- D. The VRRP IP address of the two VSP 7200 switches

Answer: D

NEW QUESTION 32

In which two situations does the Customer and Network Lifecycle workbook need to be updated? (Choose two.)

- A. On the 31st of January every year, even if no changes have been made to the ACP 4200.
- B. When an ACP 4200 component password is changed.
- C. When a new Administrator is given access to the ACP 4200.
- D. When a new host server is added to the ACP 4200.

Answer: BD

NEW QUESTION 34

Which Extreme Networks switch model is used in a new ACP 4200 release 4.0?

- A. VSP 4850
- B. VSP 7254
- C. VSP 8400
- D. VSP 7024

Answer: B

NEW QUESTION 36

An administrator is adding new equipment to the ACP 4200 in the Avaya Orchestrator Configuration Wizard. How do the IP Address and Protocols fields get populated?

- A. These are optional fields that do not need to be populated.
- B. These are automatically detected by clicking on the Detect Hardware button.
- C. These are manually entered by the administrator.
- D. These are imported from the ACP Configurator Tool Excel spreadsheet.

Answer: B

NEW QUESTION 38

Which two statements about the HP Nimble storage systems used in ACP 4200 are true? (Choose two.)

- A. ACP 4200 may use the HP Nimble 33 Base unit with up to 2 Expansion units.
- B. ACP 4200 may use the HP Nimble 16 Base unit with up to 5 Expansion units.
- C. ACP 4200 may use the HP Nimble 16 Base unit with up to 2 Expansion units.
- D. ACP 4200 may use the HP Nimble 33 Base unit with up to 5 Expansion units.

Answer: AB

NEW QUESTION 41

Refer to the exhibit.

AVAYA Orchestrator [Home](#) [Dashboards](#) [Reports](#) [ACP Configuration Wizard](#) [Help](#) [Admin](#)

^ Configure
 ^
 ^
 ^ More Options

Configuration Wizard: Avaya Converged Platform configuration - Step 2

ACP "AL_ACP", rack "AL_ACP_RACK"

< Back Next >

Detect Hardware Undo Import Export

Slot	Device Description	Serial No	IP Address	Protocols
Orientation: Vertical				
V1			IP Address +	SNMP v2 Port Community string +
V2			IP Address +	SNMP v2 Port Community string +
V3			IP Address +	SNMP v2 Port Community string +
V4			IP Address +	SNMP v2 Port Community string +
V5			IP Address +	SNMP v2 Port Community string +

An administrator is trying to add a new VSP to the ACP 4200 rack. However, when the Configuration Wizard is run and the 'Detect Hardware' button is clicked, the VSP cannot be detected.
 What is potentially causing this to happen?

- A. The VSP has not been configured with the correct slot in Configuration Wizard.
- B. The VSP has not been configured with the correct Device Description in Configuration Wizard.
- C. The VSP has not been configured with the correct Protocol in Configuration Wizard.
- D. The VSP's device credentials has not been configured correctly in System Manager.

Answer: D

NEW QUESTION 45

Which two circumstances would require the Avaya Orchestrator ACP Configuration Wizard to be run in the field? (Choose two.)

- A. When a new G450 Gateway is added to the ACP.
- B. When a new configuration file for the ACP's VSP Switches is deployed.
- C. When a new Virtual Machine is added to the ACP.
- D. When a new ESXi Host is added to the ACP.

Answer: BD

NEW QUESTION 48

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

75940X Practice Exam Features:

- * 75940X Questions and Answers Updated Frequently
- * 75940X Practice Questions Verified by Expert Senior Certified Staff
- * 75940X Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 75940X Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 75940X Practice Test Here](#)