

# Amazon

## Exam Questions AWS-Solution-Architect-Associate

Amazon AWS Certified Solutions Architect - Associate



### NEW QUESTION 1

You are trying to launch an EC2 instance, however the instance seems to go into a terminated status immediately. What would probably not be a reason that this is happening?

- A. The AMI is missing a required part.
- B. The snapshot is corrupt.
- C. You need to create storage in EBS first.
- D. You've reached your volume limit

**Answer: C**

#### Explanation:

Amazon EC2 provides a virtual computing environments, known as an instance.

After you launch an instance, AWS recommends that you check its status to confirm that it goes from the pending status to the running status, the not terminated status.

The following are a few reasons why an Amazon EBS-backed instance might immediately terminate: You've reached your volume limit.

The AMI is missing a required part. The snapshot is corrupt. Reference:

[http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/Using\\_InstanceStraightToTerminated.html](http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/Using_InstanceStraightToTerminated.html)

### NEW QUESTION 2

In Amazon EC2 Container Service components, what is the name of a logical grouping of container instances on which you can place tasks?

- A. A cluster
- B. A container instance
- C. A container
- D. A task definition

**Answer: A**

#### Explanation:

Amazon ECS contains the following components:

A Cluster is a logical grouping of container instances that you can place tasks on.

A Container instance is an Amazon EC2 instance that is running the Amazon ECS agent and has been registered into a cluster.

A Task definition is a description of an application that contains one or more container definitions. A Scheduler is the method used for placing tasks on container instances.

A Service is an Amazon ECS service that allows you to run and maintain a specified number of instances of a task definition simultaneously.

A Task is an instantiation of a task definition that is running on a container instance. A Container is a Linux container that was created as part of a task.

Reference: <http://docs.aws.amazon.com/AmazonECS/latest/developerguide/Welcome.html>

### NEW QUESTION 3

Amazon EBS provides the ability to create backups of any Amazon EC2 volume into what is known as

- A. snapshots
- B. images
- C. instance backups
- D. mirrors

**Answer: A**

#### Explanation:

Amazon allows you to make backups of the data stored in your EBS volumes through snapshots that can later be used to create a new EBS volume.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Storage.html>

### NEW QUESTION 4

One of the criteria for a new deployment is that the customer wants to use AWS Storage Gateway. However you are not sure whether you should use gateway-cached volumes or gateway-stored volumes or even what the differences are. Which statement below best describes those differences?

- A. Gateway-cached lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- B. Gateway-stored enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.
- C. Gateway-cached is free whilst gateway-stored is not.
- D. Gateway-cached is up to 10 times faster than gateway-stored.
- E. Gateway-stored lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- F. Gateway-cached enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.

**Answer: A**

#### Explanation:

Volume gateways provide cloud-backed storage volumes that you can mount as Internet Small Computer System Interface (iSCSI) devices from your on-premises application servers. The gateway supports the following volume configurations:

Gateway-cached volumes — You store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally.

Gateway-cached volumes offer a substantial cost savings on primary storage and minimize the need to scale your storage on-premises. You also retain low-latency access to your frequently accessed data.

Gateway-stored volumes — If you need low-latency access to your entire data set, you can configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3. This configuration provides durable and inexpensive off-site backups that you can recover to your local data center or Amazon EC2. For example, if you need replacement capacity for disaster recovery, you can recover the backups to Amazon EC2.

Reference: <http://docs.aws.amazon.com/storagegateway/latest/userguide/volume-gateway.html>

#### NEW QUESTION 5

A user is launching an EC2 instance in the US East region. Which of the below mentioned options is recommended by AWS with respect to the selection of the availability zone?

- A. Always select the AZ while launching an instance
- B. Always select the US-East-1-a zone for HA
- C. Do not select the AZ; instead let AWS select the AZ
- D. The user can never select the availability zone while launching an instance

**Answer: C**

#### Explanation:

When launching an instance with EC2, AWS recommends not to select the availability zone (AZ). AWS specifies that the default Availability Zone should be accepted. This is because it enables AWS to select the best Availability Zone based on the system health and available capacity. If the user launches additional instances, only then an Availability Zone should be specified. This is to specify the same or different AZ from the running instances.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-regions-availability-zones.html>

#### NEW QUESTION 6

What is a placement group in Amazon EC2?

- A. It is a group of EC2 instances within a single Availability Zone.
- B. It the edge location of your web content.
- C. It is the AWS region where you run the EC2 instance of your web content.
- D. It is a group used to span multiple Availability Zone

**Answer: A**

#### Explanation:

A placement group is a logical grouping of instances within a single Availability Zone. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

#### NEW QUESTION 7

You are migrating an internal server on your DC to an EC2 instance with EBS volume. Your server disk usage is around 500GB so you just copied all your data to a 2TB disk to be used with AWS Import/Export. Where will the data be imported once it arrives at Amazon?

- A. to a 2TB EBS volume
- B. to an S3 bucket with 2 objects of 1TB
- C. to an 500GB EBS volume
- D. to an S3 bucket as a 2TB snapshot

**Answer: B**

#### Explanation:

An import to Amazon EBS will have different results depending on whether the capacity of your storage device is less than or equal to 1 TB or greater than 1 TB. The maximum size of an Amazon EBS snapshot is 1 TB, so if the device image is larger than 1 TB, the image is chunked and stored on Amazon S3. The target location is determined based on the total capacity of the device, not the amount of data on the device.

Reference: <http://docs.aws.amazon.com/AWSImportExport/latest/DG/Concepts.html>

#### NEW QUESTION 8

In Amazon AWS, which of the following statements is true of key pairs?

- A. Key pairs are used only for Amazon SDKs.
- B. Key pairs are used only for Amazon EC2 and Amazon CloudFront.
- C. Key pairs are used only for Elastic Load Balancing and AWS IAM.
- D. Key pairs are used for all Amazon service

**Answer: B**

#### Explanation:

Key pairs consist of a public and private key, where you use the private key to create a digital signature, and then AWS uses the corresponding public key to validate the signature. Key pairs are used only for Amazon EC2 and Amazon CloudFront.

Reference: <http://docs.aws.amazon.com/general/latest/gr/aws-sec-cred-types.html>

#### NEW QUESTION 9

Does Amazon DynamoDB support both increment and decrement atomic operations?

- A. Only increment, since decrement are inherently impossible with DynamoDB's data model.
- B. No, neither increment nor decrement operations.
- C. Yes, both increment and decrement operations.
- D. Only decrement, since increment are inherently impossible with DynamoDB's data mode

**Answer: C**

#### Explanation:

Amazon DynamoDB supports increment and decrement atomic operations.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/APISummary.html>

#### NEW QUESTION 10

You need to import several hundred megabytes of data from a local Oracle database to an Amazon RDS DB instance. What does AWS recommend you use to accomplish this?

- A. Oracle export/import utilities
- B. Oracle SQL Developer
- C. Oracle Data Pump
- D. DBMS\_FILE\_TRANSFER

**Answer: C**

#### Explanation:

How you import data into an Amazon RDS DB instance depends on the amount of data you have and the number and variety of database objects in your database.

For example, you can use Oracle SQL Developer to import a simple, 20 MB database; you want to use Oracle Data Pump to import complex databases or databases that are several hundred megabytes or several terabytes in size.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Oracle.Procedural.Importing.html>

#### NEW QUESTION 10

Can you specify the security group that you created for a VPC when you launch an instance in EC2-Classic?

- A. No, you can specify the security group created for EC2-Classic when you launch a VPC instance.
- B. No
- C. Yes
- D. No, you can specify the security group created for EC2-Classic to a non-VPC based instance onl

**Answer: B**

#### Explanation:

If you're using EC2-Classic, you must use security groups created specifically for EC2-Classic. When you launch an instance in EC2-Classic, you must specify a security group in the same region as the instance. You can't specify a security group that you created for a VPC when you launch an instance in EC2-Classic.

Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-network-security.html#ec2-classic-security-groups>

#### NEW QUESTION 11

You have been given a scope to deploy some AWS infrastructure for a large organisation. The requirements are that you will have a lot of EC2 instances but may need to add more when the average utilization of your Amazon EC2 fleet is high and conversely remove them when CPU utilization is low. Which AWS services would be best to use to accomplish this?

- A. Auto Scaling, Amazon CloudWatch and AWS Elastic Beanstalk
- B. Auto Scaling, Amazon CloudWatch and Elastic Load Balancing.
- C. Amazon CloudFront, Amazon CloudWatch and Elastic Load Balancing.
- D. AWS Elastic Beanstalk , Amazon CloudWatch and Elastic Load Balancing

**Answer: B**

#### Explanation:

Auto Scaling enables you to follow the demand curve for your applications closely, reducing the need to manually provision Amazon EC2 capacity in advance. For example, you can set a condition to add new

Amazon EC2 instances in increments to the Auto Scaling group when the average utilization of your Amazon EC2 fleet is high; and similarly, you can set a condition to remove instances in the same increments when CPU utilization is low. If you have predictable load changes, you can set a schedule through Auto Scaling to plan your scaling activities. You can use Amazon CloudWatch to send alarms to trigger scaling activities and Elastic Load Balancing to help distribute traffic to your instances within Auto Scaling groups. Auto Scaling enables you to run your Amazon EC2 fleet at optimal utilization. Reference:

<http://aws.amazon.com/autoscaling/>

#### NEW QUESTION 15

Much of your company's data does not need to be accessed often, and can take several hours for retrieval time, so it's stored on Amazon Glacier. However someone within your organization has expressed concerns that his data is more sensitive than the other data, and is wondering whether the high level of encryption that he knows is on S3 is also used on the much cheaper Glacier service. Which of the following statements would be most applicable in regards to this concern?

- A. There is no encryption on Amazon Glacier, that's why it is cheaper.
- B. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3 but you can change it to AES-256 if you are willing to pay more.
- C. Amazon Glacier automatically encrypts the data using AES-256, the same as Amazon S3.
- D. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3.

**Answer: C**

#### Explanation:

Like Amazon S3, the Amazon Glacier service provides low-cost, secure, and durable storage. But where S3 is designed for rapid retrieval, Glacier is meant to be used as an archival service for data that is not accessed often, and for which retrieval times of several hours are suitable.

Amazon Glacier automatically encrypts the data using AES-256 and stores it durably in an immutable form. Amazon Glacier is designed to provide average annual durability of 99.999999999% for an archive. It stores each archive in multiple facilities and multiple devices. Unlike traditional systems which can require laborious data verification and manual repair, Glacier performs regular, systematic data integrity checks, and is built to be automatically self-healing.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

**NEW QUESTION 18**

You've created your first load balancer and have registered your EC2 instances with the load balancer. Elastic Load Balancing routinely performs health checks on all the registered EC2 instances and automatically distributes all incoming requests to the DNS name of your load balancer across your registered, healthy EC2 instances. By default, the load balancer uses the \_ protocol for checking the health of your instances.

- A. HTTPS
- B. HTTP
- C. ICMP
- D. IPv6

**Answer: B**

**Explanation:**

In Elastic Load Balancing a health configuration uses information such as protocol, ping port, ping path (URL), response timeout period, and health check interval to determine the health state of the instances registered with the load balancer.

Currently, HTTP on port 80 is the default health check. Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/TerminologyandKeyConcepts.html>

**NEW QUESTION 19**

You need to set up a complex network infrastructure for your organization that will be reasonably easy to deploy, replicate, control, and track changes on. Which AWS service would be best to use to help you accomplish this?

- A. AWS Import/Export
- B. AWS CloudFormation
- C. Amazon Route 53
- D. Amazon CloudWatch

**Answer: B**

**Explanation:**

AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you. You don't need to manually create and configure AWS resources and figure out what's dependent on what. AWS CloudFormation handles all of that.

Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/Welcome.html>

**NEW QUESTION 22**

In Amazon EC2, while sharing an Amazon EBS snapshot, can the snapshots with AWS Marketplace product codes be public?

- A. Yes, but only for US-based providers.
- B. Yes, they can be public.
- C. No, they cannot be made public.
- D. Yes, they are automatically made public by the system

**Answer: C**

**Explanation:**

Snapshots with AWS Marketplace product codes can't be made public. Reference:

<http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/ebs-modifying-snapshot-permissions.html>

**NEW QUESTION 27**

An organization has created an application which is hosted on the AWS EC2 instance. The application stores images to S3 when the end user uploads to it. The organization does not want to store the AWS secure credentials required to access the S3 inside the instance. Which of the below mentioned options is a possible solution to avoid any security threat?

- A. Use the IAM based single sign between the AWS resources and the organization application.
- B. Use the IAM role and assign it to the instance.
- C. Since the application is hosted on EC2, it does not need credentials to access S3.
- D. Use the X.509 certificates instead of the access and the secret access key

**Answer: B**

**Explanation:**

The AWS IAM role uses temporary security credentials to access AWS services. Once the role is assigned to an instance, it will not need any security credentials to be stored on the instance. Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/iam-roles-for-amazon-ec2.html>

**NEW QUESTION 31**

Can resource record sets in a hosted zone have a different domain suffix (for example, www.blog.acme.com and www.acme.ca)?

- A. Yes, it can have for a maximum of three different TLDs.
- B. Yes
- C. Yes, it can have depending on the TLD.
- D. No

**Answer: D**



**Explanation:**

The resource record sets contained in a hosted zone must share the same suffix. For example, the example.com hosted zone can contain resource record sets for www.example.com and www.aws.example.com subdomains, but it cannot contain resource record sets for a www.example.ca subdomain.

Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/AboutHostedZones.html>

**NEW QUESTION 36**

You are running PostgreSQL on Amazon RDS and it seems to be all running smoothly deployed in one availability zone. A database administrator asks you if DB instances running PostgreSQL support Multi-AZ deployments. What would be a correct response to this QUESTION ?

- A. Yes.
- B. Yes but only for small db instances.
- C. No.
- D. Yes but you need to request the service from AW

**Answer:** A

**Explanation:**

Amazon RDS supports DB instances running several versions of PostgreSQL. Currently we support PostgreSQL versions 9.3.1, 9.3.2, and 9.3.3. You can create DB instances and DB snapshots, point-in-time restores and backups.

DB instances running PostgreSQL support Multi-AZ deployments, Provisioned IOPS, and can be created inside a VPC. You can also use SSL to connect to a DB instance running PostgreSQL.

You can use any standard SQL client application to run commands for the instance from your client computer. Such applications include pgAdmin, a popular Open Source administration and development tool for PostgreSQL, or psql, a command line utility that is part of a PostgreSQL installation. In order to deliver a managed service experience, Amazon RDS does not provide host access to DB instances, and it restricts access to certain system procedures and tables that require advanced privileges. Amazon RDS supports access to databases on a DB instance using any standard SQL client application. Amazon RDS does not allow direct host access to a DB instance via Telnet or Secure Shell (SSH).

Reference: [http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP\\_PostgreSQL.html](http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_PostgreSQL.html)

**NEW QUESTION 40**

What does the following policy for Amazon EC2 do?

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

- A. Allow users to use actions that start with "Describe" over all the EC2 resources.
- B. Share an AMI with a partner
- C. Share an AMI within the account
- D. Allow a group to only be able to describe, run, stop, start, and terminate instances

**Answer:** A

**Explanation:**

You can use IAM policies to control the actions that your users can perform against your EC2 resources. For instance, a policy with the following statement will allow users to perform actions whose name start with "Describe" against all your EC2 resources.

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

**NEW QUESTION 42**

A major customer has asked you to set up his AWS infrastructure so that it will be easy to recover in the case of a disaster of some sort. Which of the following is important when thinking about being able to quickly launch resources in AWS to ensure business continuity in case of a disaster?

- A. Create and maintain AMIs of key servers where fast recovery is required.
- B. Regularly run your servers, test them, and apply any software updates and configuration changes.
- C. All items listed here are important when thinking about disaster recovery.
- D. Ensure that you have all supporting custom software packages available in AWS

**Answer:** C

**Explanation:**

In the event of a disaster to your AWS infrastructure you should be able to quickly launch resources in Amazon Web Services (AWS) to ensure business continuity.

The following are some key steps you should have in place for preparation:

1. Set up Amazon EC2 instances to replicate or mirror data.
2. Ensure that you have all supporting custom software packages available in AWS.
3. Create and maintain AMIs of key servers where fast recovery is required.
4. Regularly run these servers, test them, and apply any software updates and configuration changes.
5. Consider automating the provisioning of AWS resources.

Reference: [http://d36cz9buwru1tt.cloudfront.net/AWS\\_Disaster\\_Recovery.pdf](http://d36cz9buwru1tt.cloudfront.net/AWS_Disaster_Recovery.pdf)

**NEW QUESTION 47**

A user needs to run a batch process which runs for 10 minutes. This will only be run once, or at maximum twice, in the next month, so the processes will be temporary only. The process needs 15 X-Large instances. The process downloads the code from S3 on each instance when it is launched, and then generates a

temporary log file. Once the instance is terminated, all the data will be lost. Which of the below mentioned pricing models should the user choose in this case?

- A. Spot instance.
- B. Reserved instance.
- C. On-demand instance.
- D. EBS optimized instanc

**Answer:** A

**Explanation:**

In Amazon Web Services, the spot instance is useful when the user wants to run a process temporarily. The spot instance can terminate the instance if the other user outbids the existing bid. In this case all storage is temporary and the data is not required to be persistent. Thus, the spot instance is a good option to save money.

Reference: <http://aws.amazon.com/ec2/purchasing-options/spot-instances/>

**NEW QUESTION 48**

Which of the following is NOT a characteristic of Amazon Elastic Compute Cloud (Amazon EC2)?

- A. It can be used to launch as many or as few virtual servers as you need.
- B. It increases the need to forecast traffic by providing dynamic IP addresses for static cloud computing.
- C. It eliminates your need to invest in hardware up front, so you can develop and deploy applications faster.
- D. It offers scalable computing capacity in the Amazon Web Services (AWS) cloud

**Answer:** B

**Explanation:**

Amazon Elastic Compute Cloud (Amazon EC2) provides scalable computing capacity in the Amazon Web Services (AWS) cloud. Using Amazon EC2 eliminates your need to invest in hardware up front, so you can develop and deploy applications faster. You can use Amazon EC2 to launch as many or as few virtual servers as you need, configure security and networking, and manage storage. Amazon EC2 enables you to scale up or down to handle changes in requirements or spikes in popularity, reducing your need to forecast traffic.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/concepts.html>

**NEW QUESTION 53**

You have been storing massive amounts of data on Amazon Glacier for the past 2 years and now start to wonder if there are any limitations on this. What is the correct answer to your QUESTION ?

- A. The total volume of data is limited but the number of archives you can store are unlimited.
- B. The total volume of data is unlimited but the number of archives you can store are limited.
- C. The total volume of data and number of archives you can store are unlimited.
- D. The total volume of data is limited and the number of archives you can store are limite

**Answer:** C

**Explanation:**

An archive is a durably stored block of information. You store your data in Amazon Glacier as archives. You may upload a single file as an archive, but your costs will be lower if you aggregate your data. TAR and ZIP are common formats that customers use to aggregate multiple files into a single file before uploading to Amazon Glacier.

The total volume of data and number of archives you can store are unlimited. Individual Amazon Glacier archives can range in size from 1 byte to 40 terabytes.

The largest archive that can be uploaded in a single upload request is 4 gigabytes.

For items larger than 100 megabytes, customers should consider using the Multipart upload capability. Archives stored in Amazon Glacier are immutable, i.e. archives can be uploaded and deleted but cannot be edited or overwritten.

Reference: <https://aws.amazon.com/glacier/faqs/>

**NEW QUESTION 54**

A user has configured ELB with two EBS backed EC2 instances. The user is trying to understand the DNS access and IP support for ELB. Which of the below mentioned statements may not help the user understand the IP mechanism supported by ELB?

- A. The client can connect over IPV4 or IPV6 using Dualstack
- B. Communication between the load balancer and back-end instances is always through IPV4
- C. ELB DNS supports both IPV4 and IPV6
- D. The ELB supports either IPV4 or IPV6 but not both

**Answer:** D

**Explanation:**

Elastic Load Balancing supports both Internet Protocol version 6 (IPv6) and Internet Protocol version 4 (IPv4). Clients can connect to the user's load balancer using either IPv4 or IPv6 (in EC2-Classic) DNS. However, communication between the load balancer and its back-end instances uses only IPv4. The user can use the Dualstack-prefixed DNS name to enable IPv6 support for communications between the client and the load balancers. Thus, the clients are able to access the load balancer using either IPv4 or IPv6 as their individual connectivity needs dictate.

Reference: <http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/UserScenariosForEC2.html>

**NEW QUESTION 57**

Does AWS CloudFormation support Amazon EC2 tagging?

- A. Yes, AWS CloudFormation supports Amazon EC2 tagging
- B. No, CloudFormation doesn't support any tagging
- C. No, it doesn't support Amazon EC2 tagging.
- D. It depends if the Amazon EC2 tagging has been defined in the template

**Answer:** A

**Explanation:**

In AWS CloudFormation, Amazon EC2 resources that support the tagging feature can also be tagged in an AWS template. The tag values can refer to template parameters, other resource names, resource attribute values (e.g. addresses), or values computed by simple functions (e.g., a concatenated list of strings).

Reference: <http://aws.amazon.com/cloudformation/faqs/>

**NEW QUESTION 60**

You have set up an Elastic Load Balancer (ELB) with the usual default settings, which route each request independently to the application instance with the smallest load. However, someone has asked you to bind a user's session to a specific application instance so as to ensure that all requests coming from the user during the session will be sent to the same application instance. AWS has a feature to do this. What is it called?

- A. Connection draining
- B. Proxy protocol
- C. Tagging
- D. Sticky session

**Answer:** D

**Explanation:**

An Elastic Load Balancer(ELB) by default, routes each request independently to the application instance with the smallest load. However, you can use the sticky session feature (also known as session affinity), which enables the load balancer to bind a user's session to a specific application instance. This ensures that all requests coming from the user during the session will be sent to the same application instance. The key to managing the sticky session is determining how long your load balancer should consistently route the user's request to the same application instance. If your application has its own session cookie, then you can set Elastic Load Balancing to create the session cookie to follow the duration specified by the application's session cookie. If your application does not have its own session cookie, then you can set Elastic Load Balancing to create a session cookie by specifying your own stickiness duration. You can associate stickiness duration for only HTTP/HTTPS load balancer listeners.

An application instance must always receive and send two cookies: A cookie that defines the stickiness duration and a special Elastic Load Balancing cookie named AWSELB, that has the mapping to the application instance.

Reference: <http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/TerminologyandKeyConcepts.html#session-stickiness>

**NEW QUESTION 64**

A user wants to achieve High Availability with PostgreSQL DB. Which of the below mentioned functionalities helps achieve HA?

- A. Multi AZ
- B. Read Replica
- C. Multi region
- D. PostgreSQL does not support HA

**Answer:** A

**Explanation:**

The Multi AZ feature allows the user to achieve High Availability. For Multi AZ, Amazon RDS automatically provisions and maintains a synchronous "standby" replica in a different Availability Zone. Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

**NEW QUESTION 67**

You are building a system to distribute confidential documents to employees. Using CloudFront, what method could be used to serve content that is stored in S3, but not publically accessible from S3 directly?

- A. Add the CloudFront account security group "amazon-cf/amazon-cf-sg" to the appropriate S3 bucket policy.
- B. Create a S3 bucket policy that lists the CloudFront distribution ID as the Principal and the target bucket as the Amazon Resource Name (ARN).
- C. Create an Identity and Access Management (IAM) User for CloudFront and grant access to the objects in your S3 bucket to that IAM User.
- D. Create an Origin Access Identity (OAI) for CloudFront and grant access to the objects in your S3 bucket to that OAI.

**Answer:** D

**Explanation:**

You restrict access to Amazon S3 content by creating an origin access identity, which is a special CloudFront user. You change Amazon S3 permissions to give the origin access identity permission to access your objects, and to remove permissions from everyone else. When your users access your Amazon S3 objects using CloudFront URLs, the CloudFront origin access identity gets the objects on your users' behalf. If your users try to access objects using Amazon S3 URLs, they're denied access. The origin access identity has permission to access objects in your Amazon S3 bucket, but users don't. Reference:

<http://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/private-content-restricting-access-to-s3.html>

**NEW QUESTION 71**

A user is planning to launch a scalable web application. Which of the below mentioned options will not affect the latency of the application?

- A. Region.
- B. Provisioned IOPS.
- C. Availability Zone.
- D. Instance size

**Answer:** C

**Explanation:**

In AWS, the instance size decides the I/O characteristics. The provisioned IOPS ensures higher throughput, and lower latency. The region does affect the latency; latency will always be less when the instance is near to the end user. Within a region the user uses any AZ and this does not affect the latency. The AZ is mainly for fault toleration or HA.

Reference: [http://media.amazonwebservices.com/AWS\\_Security\\_Best\\_Practices.pdf](http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf)



#### NEW QUESTION 73

A user is running a batch process which runs for 1 hour every day. Which of the below mentioned options is the right instance type and costing model in this case if the user performs the same task for the whole year?

- A. EBS backed instance with on-demand instance pricing.
- B. EBS backed instance with heavy utilized reserved instance pricing.
- C. EBS backed instance with low utilized reserved instance pricing.
- D. Instance store backed instance with spot instance pricing.

**Answer:** A

#### Explanation:

For Amazon Web Services, the reserved instance helps the user save money if the user is going to run the same instance for a longer period. Generally if the user uses the instances around 30-40% annually it is recommended to use RI. Here as the instance runs only for 1 hour daily it is not recommended to have RI as it will be costlier. The user should use on-demand with EBS in this case.

Reference: <http://aws.amazon.com/ec2/purchasing-options/reserved-instances/>

#### NEW QUESTION 77

You have just set up a large site for a client which involved a huge database which you set up with Amazon RDS to run as a Multi-AZ deployment. You now start to worry about what will happen if the database instance fails. Which statement best describes how this database will function if there is a database failure?

- A. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- B. Your database will not resume operation without manual administrative intervention.
- C. Updates to your DB Instance are asynchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- D. Updates to your DB Instance are synchronously replicated across S3 to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

**Answer:** A

#### Explanation:

Amazon Relational Database Service (Amazon RDS) is a managed service that makes it easy to set up, operate, and scale a relational database in the cloud. It provides cost-efficient and resizable capacity, while managing time-consuming database administration tasks, freeing you up to focus on your applications and business.

When you create or modify your DB Instance to run as a Multi-AZ deployment, Amazon RDS automatically provisions and maintains a synchronous "standby" replica in a different Availability Zone. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

During certain types of planned maintenance, or in the unlikely event of DB Instance failure or Availability Zone failure, Amazon RDS will automatically failover to the standby so that you can resume database writes and reads as soon as the standby is promoted. Since the name record for your DB Instance remains the same, your application can resume database operation without the need for manual administrative intervention. With Multi-AZ deployments, replication is transparent: you do not interact directly with the standby, and it cannot be used to serve read traffic. If you are using Amazon RDS for MySQL and are looking to scale read traffic beyond the capacity constraints of a single DB Instance, you can deploy one or more Read Replicas.

Reference: <http://aws.amazon.com/rds/faqs/>

#### NEW QUESTION 78

Which IAM role do you use to grant AWS Lambda permission to access a DynamoDB Stream?

- A. Dynamic role
- B. Invocation role
- C. Execution role
- D. Event Source role

**Answer:** C

#### Explanation:

You grant AWS Lambda permission to access a DynamoDB Stream using an IAM role known as the "execution role".

Reference: <http://docs.aws.amazon.com/lambda/latest/dg/intro-permission-model.html>

#### NEW QUESTION 81

A user is observing the EC2 CPU utilization metric on CloudWatch. The user has observed some interesting patterns while filtering over the 1 week period for a particular hour. The user wants to zoom that data point to a more granular period. How can the user do that easily with CloudWatch?

- A. The user can zoom a particular period by selecting that period with the mouse and then releasing the mouse
- B. The user can zoom a particular period by specifying the aggregation data for that period
- C. The user can zoom a particular period by double clicking on that period with the mouse
- D. The user can zoom a particular period by specifying the period in the Time Range

**Answer:** A

#### Explanation:

Amazon CloudWatch provides the functionality to graph the metric data generated either by the AWS services or the custom metric to make it easier for the user to analyse. The AWS CloudWatch console provides the option to change the granularity of a graph and zoom in to see data over a shorter time period. To zoom, the user has to click in the graph details pane, drag on the graph area for selection, and then release the mouse button.

Reference: [http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/zoom\\_in\\_on\\_graph.html](http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/zoom_in_on_graph.html)

#### NEW QUESTION 84

A user comes to you and wants access to Amazon CloudWatch but only wants to monitor a specific LoadBalancer. Is it possible to give him access to a specific

set of instances or a specific LoadBalancer?

- A. No because you can't use IAM to control access to CloudWatch data for specific resources.
- B. Ye
- C. You can use IAM to control access to CloudWatch data for specific resources.
- D. No because you need to be Sysadmin to access CloudWatch data.
- E. Ye
- F. Any user can see all CloudWatch data and needs no access right

**Answer:** A

**Explanation:**

Amazon CloudWatch integrates with AWS Identity and Access Management (IAM) so that you can specify which CloudWatch actions a user in your AWS Account can perform. For example, you could create an IAM policy that gives only certain users in your organization permission to use GetMetricStatistics. They could then use the action to retrieve data about your cloud resources. You can't use IAM to control access to CloudWatch data for specific resources. For example, you can't give a user access to CloudWatch data for only a specific set of instances or a specific LoadBalancer. Permissions granted using IAM cover all the cloud resources you use with CloudWatch. In addition, you can't use IAM roles with the Amazon CloudWatch command line tools. Using Amazon CloudWatch with IAM doesn't change how you use CloudWatch. There are no changes to CloudWatch actions, and no new CloudWatch actions related to users and access control.  
Reference: <http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/UsingIAM.html>

**NEW QUESTION 88**

A user is planning to make a mobile game which can be played online or offline and will be hosted on EC2. The user wants to ensure that if someone breaks the highest score or they achieve some milestone they can inform all their colleagues through email. Which of the below mentioned AWS services helps achieve this goal?

- A. AWS Simple Workflow Service.
- B. AWS Simple Email Service.
- C. Amazon Cognito
- D. AWS Simple Queue Servic

**Answer:** B

**Explanation:**

Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. It integrates with other AWS services, making it easy to send emails from applications that are hosted on AWS.  
Reference: <http://aws.amazon.com/ses/faqs/>

**NEW QUESTION 92**

You need to create an Amazon Machine Image (AM) for a customer for an application which does not appear to be part of the standard AWS AM template that you can see in the AWS console. What are the alternative possibilities for creating an AM on AWS?

- A. You can purchase an AMs from a third party but cannot create your own AM.
- B. You can purchase an AMIs from a third party or can create your own AMI.
- C. Only AWS can create AMIs and you need to wait till it becomes available.
- D. Only AWS can create AMIs and you need to request them to create one for yo

**Answer:** B

**Explanation:**

You can purchase an AMIs from a third party, including AMIs that come with service contracts from organizations such as Red Hat. You can also create an AMI and sell it to other Amazon EC2 users. After you create an AMI, you can keep it private so that only you can use it, or you can share it with a specified list of AWS accounts. You can also make your custom AMI public so that the community can use it. Building a safe, secure, usable AMI for public consumption is a fairly straightforward process, if you follow a few simple guidelines.  
Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/AMIs.htm>

**NEW QUESTION 93**

A user has deployed an application on his private cloud. The user is using his own monitoring tool. He wants to configure it so that whenever there is an error, the monitoring tool will notify him via SMS. Which of the below mentioned AWS services will help in this scenario?

- A. AWS SES
- B. AWS SNS
- C. None because the user infrastructure is in the private cloud.
- D. AWS SMS

**Answer:** B

**Explanation:**

Amazon Simple Notification Service (Amazon SNS) is a fast, flexible, and fully managed push messaging service. Amazon SNS can be used to make push notifications to mobile devices. Amazon SNS can deliver notifications by SMS text message or email to the Amazon Simple Queue Service (SQS) queues or to any HTTP endpoint. In this case user can use the SNS apis to send SMS.  
Reference: <http://aws.amazon.com/sns/>

**NEW QUESTION 94**

You receive the following request from a client to quickly deploy a static website for them, specifically on AWS. The requirements are low-cost, reliable, online storage, and a reliable and cost-effective way to route customers to the website, as well as a way to deliver content with low latency and high data transfer speeds so that visitors to his website don't experience unnecessary delays. What do you think would be the minimum AWS services that could fulfill the client's request?

- A. Amazon Route 53, Amazon CloudFront and Amazon VPC.
- B. Amazon S3, Amazon Route 53 and Amazon RDS
- C. Amazon S3, Amazon Route 53 and Amazon CloudFront
- D. Amazon S3 and Amazon Route 53.

**Answer:** C

**Explanation:**

You can easily and inexpensively use AWS to host a website that uses client-side technologies (such as HTML, CSS, and JavaScript) and does not require server-side technologies (such as PHP and ASP.NET). This type of site is called a static website, and is used to display content that does not change frequently. Before you create and deploy a static website, you must plan your architecture to ensure that it meets your requirements. Amazon S3, Amazon Route 53, and Amazon CloudFront would be required in this instance.

Reference: <http://docs.aws.amazon.com/gettingstarted/latest/swb/website-hosting-intro.html>

**NEW QUESTION 95**

What is the default maximum number of Access Keys per user?

- A. 10
- B. 15
- C. 2
- D. 20

**Answer:** C

**Explanation:**

The default maximum number of Access Keys per user is 2.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/LimitationsOnEntities.html>

**NEW QUESTION 97**

You need to create a JSON-formatted text file for AWS CloudFormation. This is your first template and the only thing you know is that the templates include several major sections but there is only one that is required for it to work. What is the only section required?

- A. Mappings
- B. Outputs
- C. Resources
- D. Conditions

**Answer:** C

**Explanation:**

AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you.

A template is a JSON-formatted text file that describes your AWS infrastructure. Templates include several major sections.

The Resources section is the only section that is required.

The first character in the template must be an open brace ({), and the last character must be a closed brace (}). The following template fragment shows the template structure and sections.

Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/template-anatomy.html>

**NEW QUESTION 101**

You have been asked to tighten up the password policies in your organization after a serious security breach, so you need to consider every possible security measure. Which of the following is not an account password policy for IAM Users that can be set?

- A. Force IAM users to contact an account administrator when the user has allowed his or her password to expire.
- B. A minimum password length.
- C. Force IAM users to contact an account administrator when the user has entered his password incorrectly.
- D. Prevent IAM users from reusing previous password

**Answer:** C

**Explanation:**

IAM users need passwords in order to access the AWS Management Console. (They do not need passwords if they will access AWS resources programmatically by using the CLI, AWS SDKs, or the APIs.)

You can use a password policy to do these things: Set a minimum password length.

Require specific character types, including uppercase letters, lowercase letters, numbers, and non-alphanumeric characters. Be sure to remind your users that passwords are case sensitive. Allow all IAM users to change their own passwords.

Require IAM users to change their password after a specified period of time (enable password expiration). Prevent IAM users from reusing previous passwords.

Force IAM users to contact an account administrator when the user has allowed his or her password to expire.

Reference: [http://docs.aws.amazon.com/IAM/latest/UserGuide/Using\\_ManagingPasswordPolicies.html](http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_ManagingPasswordPolicies.html)

**NEW QUESTION 103**

You have just set up your first Elastic Load Balancer (ELB) but it does not seem to be configured properly. You discover that before you start using ELB, you have to configure the listeners for your load balancer. Which protocols does ELB use to support the load balancing of applications?

- A. HTTP and HTTPS
- B. HTTP, HTTPS, TCP, SSL and SSH
- C. HTTP, HTTPS, TCP, and SSL
- D. HTTP, HTTPS, TCP, SSL and SFTP

**Answer:** C

**Explanation:**

Before you start using Elastic Load Balancing(ELB), you have to configure the listeners for your load balancer. A listener is a process that listens for connection requests. It is configured with a protocol and a port number for front-end (client to load balancer) and back-end (load balancer to back-end instance) connections. Elastic Load Balancing supports the load balancing of applications using HTTP, HTTPS (secure HTTP), TCP, and SSL (secure TCP) protocols. The HTTPS uses the SSL protocol to establish secure connections over the HTTP layer. You can also use SSL protocol to establish secure connections over the TCP layer. The acceptable ports for both HTTPS/SSL and HTTP/TCP connections are 25, 80, 443, 465, 587, and 1024-65535.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/elb-listener-config.html>

**NEW QUESTION 104**

After setting up some EC2 instances you now need to set up a monitoring solution to keep track of these instances and to send you an email when the CPU hits a certain threshold. Which statement below best describes what thresholds you can set to trigger a CloudWatch Alarm?

- A. Set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.
- B. Thresholds need to be set in IAM not CloudWatch
- C. Only default thresholds can be set you can't choose your own thresholds.
- D. Set a target value and choose whether the alarm will trigger when the value hits this threshold

**Answer:** A

**Explanation:**

Amazon CloudWatch is a monitoring service for AWS cloud resources and the applications you run on AWS. You can use Amazon CloudWatch to collect and track metrics, collect and monitor log files, and set alarms.

When you create an alarm, you first choose the Amazon CloudWatch metric you want it to monitor. Next, you choose the evaluation period (e.g., five minutes or one hour) and a statistical value to measure (e.g., Average or Maximum).

To set a threshold, set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.

Reference: <http://aws.amazon.com/cloudwatch/faqs/>

**NEW QUESTION 109**

You're trying to delete an SSL certificate from the IAM certificate store, and you're getting the message "Certificate: <certificate-id> is being used by CloudFront." Which of the following statements is probably the reason why you are getting this error?

- A. Before you can delete an SSL certificate, you need to either rotate SSL certificates or revert from using a custom SSL certificate to using the default CloudFront certificate.
- B. You can't delete SSL certificates . You need to request it from AWS.
- C. Before you can delete an SSL certificate, you need to set up the appropriate access level in IAM
- D. Before you can delete an SSL certificate you need to set up https on your serve

**Answer:** A

**Explanation:**

CloudFront is a web service that speeds up distribution of your static and dynamic web content, for example, .html, .css, .php, and image files, to end users.

Every CloudFront web distribution must be associated either with the default CloudFront certificate or with a custom SSL certificate. Before you can delete an SSL certificate, you need to either rotate SSL certificates (replace the current custom SSL certificate with another custom SSL certificate) or revert from using a custom SSL certificate to using the default CloudFront certificate.

Reference: <http://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/Troubleshooting.html>

**NEW QUESTION 114**

You are setting up some IAM user policies and have also become aware that some services support resource-based permissions, which let you attach policies to the service's resources instead of to IAM users or groups. Which of the below statements is true in regards to resource-level permissions?

- A. All services support resource-level permissions for all actions.
- B. Resource-level permissions are supported by Amazon CloudFront
- C. All services support resource-level permissions only for some actions.
- D. Some services support resource-level permissions only for some action

**Answer:** D

**Explanation:**

AWS Identity and Access Management is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS. The service is targeted at organizations with multiple users or systems that use AWS products such as Amazon EC2, Amazon RDS, and the AWS Management Console. With IAM, you can centrally manage users, security credentials such as access keys, and permissions that control which AWS resources users can access.

In addition to supporting IAM user policies, some services support resource-based permissions, which let you attach policies to the service's resources instead of to IAM users or groups. Resource-based permissions are supported by Amazon S3, Amazon SNS, and Amazon SQS.

The resource-level permissions service supports IAM policies in which you can specify individual resources using Amazon Resource Names (ARNs) in the policy's Resource element.

Some services support resource-level permissions only for some actions.

Reference: [http://docs.aws.amazon.com/IAM/latest/UserGuide/Using\\_SpecificProducts.html](http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_SpecificProducts.html)

**NEW QUESTION 119**

Any person or application that interacts with AWS requires security credentials. AWS uses these credentials to identify who is making the call and whether to allow the requested access. You have just set up a VPC network for a client and you are now thinking about the best way to secure this network. You set up a security



group called vpcsecuritygroup. Which following statement is true in respect to the initial settings that will be applied to this security group if you choose to use the default settings for this group?

- A. Allow all inbound traffic and allow no outbound traffic.
- B. Allow no inbound traffic and allow all outbound traffic.
- C. Allow inbound traffic on port 80 only and allow all outbound traffic.
- D. Allow all inbound traffic and allow all outbound traffi

**Answer: B**

**Explanation:**

Amazon VPC provides advanced security features such as security groups and network access control lists to enable inbound and outbound filtering at the instance level and subnet level.

AWS assigns each security group a unique ID in the form sg-xxxxxxx. The following are the initial settings for a security group that you create:

Allow no inbound traffic Allow all outbound traffic

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-network-security.html>

**NEW QUESTION 122**

You are using Amazon SES as an email solution but are unsure of what its limitations are. Which statement below is correct in regards to that?

- A. New Amazon SES users who have received production access can send up to 1,000 emails per 24-hour period, at a maximum rate of 10 emails per second.
- B. Every Amazon SES sender has a the same set of sending limits
- C. Sending limits are based on messages rather than on recipients
- D. Every Amazon SES sender has a unique set of sending limits

**Answer: D**

**Explanation:**

Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. Amazon SES eliminates the complexity and expense of building an in-house email solution or licensing, installing, and operating a third-party email service for this type of email communication.

Every Amazon SES sender has a unique set of sending limits, which are calculated by Amazon SES on an ongoing basis:

Sending quota — the maximum number of emails you can send in a 24-hour period. Maximum send rate — the maximum number of emails you can send per second.

New Amazon SES users who have received production access can send up to 10,000 emails per 24-hour period, at a maximum rate of 5 emails per second.

Amazon SES automatically adjusts these limits upward, as long as you send high-quality email. If your existing quota is not adequate for your needs and the system has not automatically increased your quota, you can submit an SES Sending Quota Increase case at any time.

Sending limits are based on recipients ratherthan on messages. You can check your sending limits at any time by using the Amazon SES console.

Note that if your email is detected to be of poor or QUESTION able quality (e.g., high complaint rates, high bounce rates, spam, or abusive content), Amazon SES might temporarily or permanently reduce your permitted send volume, or take other action as AWS deems appropriate.

Reference: <https://aws.amazon.com/ses/faqs/>

**NEW QUESTION 125**

You have set up an S3 bucket with a number of images in it and you have decided that you want anybody to be able to access these images, even anonymous users. To accomplish this you create a bucket policy. You will need to use an Amazon S3 bucket policy that specifies a in the principal element, which means anyone can access the bucket.

- A. hash tag (#)
- B. anonymous user
- C. wildcard (\*)
- D. S3 user

**Answer: C**

**Explanation:**

You can use the AWS Policy Generator to create a bucket policy for your Amazon S3 bucket. You can then use the generated document to set your bucket policy by using the Amazon S3 console, by a number of third-party tools, or via your application.

You use an Amazon S3 bucket policy that specifies a wildcard (\*) in the principal element, which means anyone can access the bucket. With anonymous access, anyone (including users without an AWS account) will be able to access the bucket.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#d0e20565>

**NEW QUESTION 129**

In Amazon CloudFront, if you use Amazon EC2 instances and other custom origins with CloudFront, it is recommended to .

- A. not use Elastic Load Balancing
- B. restrict Internet communication to private instances while allowing outgoing traffic
- C. enable access key rotation for CloudWatch metrics
- D. specify the URL of the load balancer for the domain name of your origin server

**Answer: D**

**Explanation:**

In Amazon CloudFront, you should use an Elastic Load Balancing load balancer to handle traffic across multiple Amazon EC2 instances and to isolate your application from changes to Amazon EC2 instances. When you create your CloudFront distribution, specify the URL of the load balancer for the domain name of your origin server.

Reference: <http://docs.aws.amazon.com/AmazonCoudFront/latest/DeveloperGuide/CustomOriginBestPractices.html>

**NEW QUESTION 134**

A government client needs you to set up secure cryptographic key storage for some of their extremely confidential data. You decide that the AWS CloudHSM is

the best service for this. However, there seem to be a few pre-requisites before this can happen, one of those being a security group that has certain ports open. Which of the following is correct in regards to those security groups?

- A. A security group that has port 22 (for SSH) or port 3389 (for RDP) open to your network.
- B. A security group that has no ports open to your network.
- C. A security group that has only port 3389 (for RDP) open to your network.
- D. A security group that has only port 22 (for SSH) open to your network.

**Answer:** A

**Explanation:**

AWS CloudHSM provides secure cryptographic key storage to customers by making hardware security modules (HSMs) available in the AWS cloud.

AWS CloudHSM requires the following environment before an HSM appliance can be provisioned. A virtual private cloud (VPC) in the region where you want the AWS CloudHSM service.

One private subnet (a subnet with no Internet gateway) in the VPC. The HSM appliance is provisioned into this subnet.

One public subnet (a subnet with an Internet gateway attached). The control instances are attached to this subnet.

An AWS Identity and Access Management (IAM) role that delegates access to your AWS resources to AWS CloudHSM.

An EC2 instance, in the same VPC as the HSM appliance, that has the SafeNet client software installed. This instance is referred to as the control instance and is used to connect to and manage the HSM appliance.

A security group that has port 22 (for SSH) or port 3389 (for RDP) open to your network. This security group is attached to your control instances so you can access them remotely.

**NEW QUESTION 136**

In AWS CloudHSM, in addition to the AWS recommendation that you use two or more HSM appliances in a high-availability configuration to prevent the loss of keys and data, you can also perform a remote backup/restore of a Luna SA partition if you have purchased a:

- A. Luna Restore HSM.
- B. Luna Backup HSM.
- C. Luna HSM.
- D. Luna SA HSM.

**Answer:** B

**Explanation:**

In AWS CloudHSM, you can perform a remote backup/restore of a Luna SA partition if you have purchased a Luna Backup HSM.

Reference: <http://docs.aws.amazon.com/cloudhsm/latest/userguide/cloud-hsm-backup-restore.html>

**NEW QUESTION 139**

A user has launched a large EBS backed EC2 instance in the US-East-1a region. The user wants to achieve Disaster Recovery (DR) for that instance by creating another small instance in Europe. How can the user achieve DR?

- A. Copy the instance from the US East region to the EU region
- B. Use the "Launch more like this" option to copy the instance from one region to another
- C. Copy the running instance using the "Instance Copy" command to the EU region
- D. Create an AMI of the instance and copy the AMI to the EU region
- E. Then launch the instance from the EU AMI

**Answer:** D

**Explanation:**

To launch an EC2 instance it is required to have an AMI in that region. If the AMI is not available in that region, then create a new AMI or use the copy command to copy the AMI from one region to the other region.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/CopyingAMIs.html>

**NEW QUESTION 141**

Which one of the below doesn't affect Amazon CloudFront billing?

- A. Distribution Type
- B. Data Transfer Out
- C. Dedicated IP SSL Certificates
- D. Requests

**Answer:** A

**Explanation:**

Amazon CloudFront is a web service for content delivery. CloudFront delivers your content using a global network of edge locations and works seamlessly with Amazon S3 which durably stores the original and definitive versions of your files.

Amazon CloudFront billing is mainly affected by Data Transfer Out

Edge Location Traffic Distribution Requests

Dedicated IP SSL Certificates

Reference: <http://calculator.s3.amazonaws.com/index.html>

**NEW QUESTION 145**

A user is trying to launch a similar EC2 instance from an existing instance with the option "Launch More like this". The AMI of the selected instance is deleted. What will happen in this case?

- A. AWS does not need an AMI for the "Launch more like this" option
- B. AWS will launch the instance but will not create a new AMI
- C. AWS will create a new AMI and launch the instance

D. AWS will throw an error saying that the AMI is deregistered

**Answer:** D

**Explanation:**

If the user has deregistered the AMI of an EC2 instance and is trying to launch a similar instance with the option "Launch more like this", AWS will throw an error saying that the AMI is deregistered or not available.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/launching-instance.html>

**NEW QUESTION 148**

A company wants to review the security requirements of Glacier. Which of the below mentioned statements is true with respect to the AWS Glacier data security?

- A. All data stored on Glacier is protected with AES-256 serverside encryption.
- B. All data stored on Glacier is protected with AES-128 serverside encryption.
- C. The user can set the serverside encryption flag to encrypt the data stored on Glacier.
- D. The data stored on Glacier is not encrypted by default

**Answer:** A

**Explanation:**

For Amazon Web Services, all the data stored on Amazon Glacier is protected using serverside encryption. AWS generates separate unique encryption keys for each Amazon Glacier archive, and encrypts it using AES-256. The encryption key then encrypts itself using AES-256 with a master key that is stored in a secure location.

Reference: [http://media.amazonwebservices.com/AWS\\_Security\\_Best\\_Practices.pdf](http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf)

**NEW QUESTION 153**

Which DNS name can only be resolved within Amazon EC2?

- A. Public DNS name
- B. Internal DNS name
- C. External DNS name
- D. Global DNS name

**Answer:** B

**Explanation:**

Only Internal DNS name can be resolved within Amazon EC2. Reference:

<http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-instance-addressing.html>

**NEW QUESTION 157**

While controlling access to Amazon EC2 resources, which of the following acts as a firewall that controls the traffic allowed to reach one or more instances?

- A. A security group
- B. An instance type
- C. A storage cluster
- D. An object

**Answer:** A

**Explanation:**

A security group acts as a firewall that controls the traffic allowed to reach one or more instances. When you launch an instance, you assign it one or more security groups.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

**NEW QUESTION 161**

Just when you thought you knew every possible storage option on AWS you hear someone mention Reduced Redundancy Storage (RRS) within Amazon S3.

What is the ideal scenario to use Reduced Redundancy Storage (RRS)?

- A. Huge volumes of data
- B. Sensitive data
- C. Non-critical or reproducible data
- D. Critical data

**Answer:** C

**Explanation:**

Reduced Redundancy Storage (RRS) is a new storage option within Amazon S3 that enables customers to reduce their costs by storing non-critical, reproducible data at lower levels of redundancy than Amazon S3's standard storage. RRS provides a lower cost, less durable, highly available storage option that is designed to sustain the loss of data in a single facility.

RRS is ideal for non-critical or reproducible data.

For example, RRS is a cost-effective solution for sharing media content that is durably stored elsewhere. RRS also makes sense if you are storing thumbnails and other resized images that can be easily reproduced from an original image.

Reference: <https://aws.amazon.com/s3/faqs/>

**NEW QUESTION 165**

You have some very sensitive data stored on AWS S3 and want to try every possible alternative to keeping it secure in regards to access control. What are the mechanisms available for access control on AWS S3?

- A. (IAM) policies, Access Control Lists (ACLs), bucket policies, and query string authentication.
- B. (IAM) policies, Access Control Lists (ACLs) and bucket policies.
- C. Access Control Lists (ACLs), bucket policies, and query string authentication
- D. (IAM) policies, Access Control Lists (ACLs), bucket policies, query string authentication and encryption.

**Answer:** A

**Explanation:**

Amazon S3 supports several mechanisms that give you flexibility to control who can access your data as well as how, when, and where they can access it.

Amazon S3 provides four different access control mechanisms:

AWS Identity and Access Management (IAM) policies, Access Control Lists (ACLs), bucket policies, and query string authentication.

IAM enables organizations to create and manage multiple users under a single AWS account. With IAM policies, you can grant IAM users fine-grained control to your Amazon S3 bucket or objects. You can use ACLs to selectively add (grant) certain permissions on individual objects.

Amazon S3 bucket policies can be used to add or deny permissions across some or all of the objects within a single bucket.

With Query string authentication, you have the ability to share Amazon S3 objects through URLs that are valid for a specified period of time.

**NEW QUESTION 166**

A user is planning to host a mobile game on EC2 which sends notifications to active users on either high score or the addition of new features. The user should get this notification when he is online on his mobile device. Which of the below mentioned AWS services can help achieve this functionality?

- A. AWS Simple Notification Service.
- B. AWS Simple Email Service.
- C. AWS Mobile Communication Service.
- D. AWS Simple Queue Service.

**Answer:** A

**Explanation:**

Amazon Simple Notification Service (Amazon SNS) is a fast, flexible, and fully managed push messaging service. Amazon SNS makes it simple and cost-effective to push to mobile devices, such as iPhone, iPad, Android, Kindle Fire, and internet connected smart devices, as well as pushing to other distributed services.

Reference: <http://aws.amazon.com/sns>

**NEW QUESTION 167**

After deciding that EMR will be useful in analysing vast amounts of data for a gaming website that you are architecting you have just deployed an Amazon EMR Cluster and wish to monitor the cluster performance. Which of the following tools cannot be used to monitor the cluster performance?

- A. Kinesis
- B. Ganglia
- C. CloudWatch Metrics
- D. Hadoop Web Interfaces

**Answer:** A

**Explanation:**

Amazon EMR provides several tools to monitor the performance of your cluster. Hadoop Web Interfaces

Every cluster publishes a set of web interfaces on the master node that contain information about the cluster. You can access these web pages by using an SSH tunnel to connect them on the master node. For more information, see View Web Interfaces Hosted on Amazon EMR Clusters.

CloudWatch Metrics

Every cluster reports metrics to CloudWatch. CloudWatch is a web service that tracks metrics, and which you can use to set alarms on those metrics. For more information, see Monitor Metrics with CloudWatch. Ganglia

Ganglia is a cluster monitoring tool. To have this available, you have to install Ganglia on the cluster when you launch it. After you've done so, you can monitor the cluster as it runs by using an SSH tunnel to connect to the Ganglia UI running on the master node. For more information, see Monitor Performance with Ganglia.

Reference:

<http://docs.aws.amazon.com/ElasticMapReduce/latest/DeveloperGuide/emr-troubleshoot-tools.html>

**NEW QUESTION 171**

A customer has a 10 GB AWS Direct Connect connection to an AWS region where they have a web application hosted on Amazon Elastic Computer Cloud (EC2).

The application has dependencies on an on-premises mainframe database that uses a BASE (Basic Available. Sort stale Eventual consistency) rather than an ACID (Atomicity. Consistency isolation. Durability) consistency model.

The application is exhibiting undesirable behavior because the database is not able to handle the volume of writes. How can you reduce the load on your on-premises database resources in the most cost-effective way?

- A. Use an Amazon Elastic Map Reduce (EMR) S3DistCp as a synchronization mechanism between the on-premises database and a Hadoop cluster on AWS.
- B. Modify the application to write to an Amazon SQS queue and develop a worker process to flush the queue to the on-premises database.
- C. Modify the application to use DynamoDB to feed an EMR cluster which uses a map function to write to the on-premises database.
- D. Provision an RDS read-replica database on AWS to handle the writes and synchronize the two databases using Data Pipeline.

**Answer:** A

**Explanation:**

Reference: <https://aws.amazon.com/blogs/aws/category/amazon-elastic-map-reduce/>

**NEW QUESTION 175**

Company B is launching a new game app for mobile devices. Users will log into the game using their existing social media account to streamline data capture.

Company B would like to directly save player data and scoring information from the mobile app to a DynamoDB table named Score Data

When a user saves their game the progress data will be stored to the Game state S3 bucket. What is the best approach for storing data to DynamoDB and S3?

- A. Use an EC2 Instance that is launched with an EC2 role providing access to the Score Data DynamoDB table and the GameState S3 bucket that communicates



with the mobile app via web services.

- B. Use temporary security credentials that assume a role providing access to the Score Data DynamoDB table and the Game State 53 bucket using web identity federation.
- C. Use Login with Amazon allowing users to sign in with an Amazon account providing the mobile app with access to the Score Data DynamoDB table and the Game State 53 bucket.
- D. Use an IAM user with access credentials assigned a role providing access to the Score Data DynamoDB table and the Game State 53 bucket for distribution with the mobile app.

**Answer: B**

**Explanation:**

Web Identity Federation

Imagine that you are creating a mobile app that accesses AWS resources, such as a game that runs on a mobile device and stores player and score information using Amazon S3 and DynamoDB. When you write such an app, you'll make requests to AWS services that must be signed with an AWS access key. However, we strongly recommend that you do not embed or distribute long-term AWS credentials with apps that a user downloads to a device, even in an encrypted store. Instead, build your app so that it requests temporary AWS security credentials dynamically when needed using web identity federation. The supplied temporary credentials map to an AWS role that has only the permissions needed to perform the tasks required by the mobile app.

With web identity federation, you don't need to create custom sign-in code or manage your own user identities. Instead, users of your app can sign in using a well-known identity provider (IdP) - such as Login with Amazon, Facebook, Google, or any other OpenID Connect (OIDC)-compatible IdP, receive an authentication token, and then exchange that token for temporary security credentials in AWS that map to an IAM role with permissions to use the resources in your AWS account. Using an IdP helps you keep your AWS account secure, because you don't have to embed and distribute longterm security credentials with your application.

For most scenarios, we recommend that you use Amazon Cognito because it acts as an identity broker and does much of the federation work for you. For details, see the following section, Using Amazon Cognito for Mobile Apps.

If you don't use Amazon Cognito, then you must write code that interacts with a web IdP (Login with Amazon, Facebook, Google, or any other OIDC-compatible IdP) and then calls the Assume Role With Web Identity API to trade the authentication token you get from those IdPs for AWS temporary security credentials. If you have already used this approach for existing apps, you can continue to use it.

Using Amazon Cognito for Mobile Apps

The preferred way to use web identity federation is to use Amazon Cognito. For example, Adele the developer is building a game for a mobile device where user data such as scores and profiles is stored in Amazon S3 and Amazon DynamoDB. Adele could also store this data locally on the device and use Amazon Cognito to keep it synchronized across devices. She knows that for security and maintenance reasons, long-term AWS security credentials should not be distributed with the game. She also knows that the game might have a large number of users. For all of these reasons, she does not want to create new user identities in IAM for each player. Instead, she builds the game so that users can sign in using an identity that they've already established with a well-known identity provider, such as Login with Amazon, Facebook, Google, or any OpenID Connect (OIDC)-compatible identity provider.

Her game can take advantage of the authentication mechanism from one of these providers to validate the user's identity.

To enable the mobile app to access her AWS resources, Adele first registers for a developer ID with her chosen IdPs. She also configures the application with each of these providers. In her AWS account that contains the Amazon S3 bucket and DynamoDB table for the game, Adele uses Amazon Cognito to create IAM roles that precisely define permissions that the game needs. If she is using an OIDC IdP, she also creates an IAM OIDC identity provider entity to establish trust between her AWS account and the IdP.

In the app's code, Adele calls the sign-in interface for the IdP that she configured previously. The IdP handles all the details of letting the user sign in, and the app gets an OAuth access token or OIDC ID token from the provider. Adele's app can trade this authentication information for a set of temporary security credentials that consist of an AWS access key ID, a secret access key, and a session token.

The app can then use these credentials to access web services offered by AWS. The app is limited to the permissions that are defined in the role that it assumes. The following figure shows a simplified flow for how this might work, using Login with Amazon as the IdP.

For Step 2, the app can also use Facebook, Google, or any OIDC-compatible identity provider, but that's not shown here.

Sample workflow using Amazon Cognito to federate users for a mobile application



A customer starts your app on a mobile device. The app asks the user to sign in. The app uses Login with Amazon resources to accept the user's credentials. The app uses Cognito APIs to exchange the Login with Amazon ID token for a Cognito token. The app requests temporary security credentials from AWS STS, passing the Cognito token.

The temporary security credentials can be used by the app to access any AWS resources required by the app to operate. The role associated with the temporary security credentials and its assigned policies determines what can be accessed.

Use the following process to configure your app to use Amazon Cognito to authenticate users and give your app access to AWS resources. For specific steps to accomplish this scenario, consult the documentation for Amazon Cognito.

(Optional) Sign up as a developer with Login with Amazon, Facebook, Google, or any other OpenID Connect (OIDC)-compatible identity provider and configure one or more apps with the provider. This step is optional because Amazon Cognito also supports unauthenticated (guest) access for your users.

Go to Amazon Cognito in the AWS IAM Management Console. Use the Amazon Cognito wizard to create an identity pool, which is a container that Amazon Cognito uses to keep end user identities organized for your apps. You can share identity pools between apps. When you set up an identity pool, Amazon Cognito creates one or two IAM roles (one for authenticated identities, and one for unauthenticated "guest" identities) that define permissions for Amazon Cognito users.

Download and integrate the AWS SDK for iOS or the AWS SDK for Android with your app, and import the files required to use Amazon Cognito.

Create an instance of the Amazon Cognito credentials provider, passing the identity pool ID, your AWS account number, and the Amazon Resource Name (ARN) of the roles that you associated with the identity pool. The Amazon Cognito wizard in the AWS Management Console provides sample code to help you get started.

When your app accesses an AWS resource, pass the credentials provider instance to the client object, which passes temporary security credentials to the client. The permissions for the credentials are based on the role or roles that you defined earlier.

**NEW QUESTION 177**

Your company plans to host a large donation website on Amazon Web Services (AWS). You anticipate a large and undetermined amount of traffic that will create many database writes. To be certain that you do not drop any writes to a database hosted on AWS. Which service should you use?

- A. Amazon RDS with provisioned IOPS up to the anticipated peak write throughput.
- B. Amazon Simple Queue Service (SQS) for capturing the writes and draining the queue to write to the database.
- C. Amazon ElastiCache to store the writes until the writes are committed to the database.
- D. Amazon DynamoDB with provisioned write throughput up to the anticipated peak write throughput

**Answer: B**

**Explanation:**

Amazon Simple Queue Service (Amazon SQS) offers a reliable, highly scalable hosted queue for storing messages as they travel between computers. By using Amazon SQS, developers can simply move data between distributed application components performing different tasks, without losing messages or requiring each component to be always available. Amazon SQS makes it easy to build a distributed, decoupled application, working in close conjunction with the Amazon Elastic Compute Cloud (Amazon EC2) and the other AWS infrastructure web services.

What can I do with Amazon SQS?

Amazon SQS is a web service that gives you access to a message queue that can be used to store messages while waiting for a computer to process them. This allows you to quickly build message queuing applications that can be run on any computer on the internet. Since Amazon SQS is highly scalable and you only pay for what you use, you can start small and grow your application as you wish, with no compromise on performance or reliability. This lets you focus on building sophisticated message-based applications, without worrying about how the messages are stored and managed.

You can use Amazon SQS with software applications in various ways. For example, you can: Integrate Amazon SQS with other AWS infrastructure web services to make applications more reliable and flexible.

Use Amazon SQS to create a queue of work where each message is a task that needs to be completed by a process. One or many computers can read tasks from the queue and perform them. Build a microservices architecture, using queues to connect your microservices.

Keep notifications of significant events in a business process in an Amazon SQS queue. Each event can have a corresponding message in a queue, and applications that need to be aware of the event can read and process the messages.

**NEW QUESTION 180**

Your company is in the process of developing a next generation pet collar that collects biometric information to assist families with promoting healthy lifestyles for their pets. Each collar will push 30kb of biometric data in JSON format every 2 seconds to a collection platform that will process and analyze the data providing health trending information back to the pet owners and veterinarians via a web portal. Management has tasked you to architect the collection platform ensuring the following requirements are met.

Provide the ability for real-time analytics of the inbound biometric data. Ensure processing of the biometric data is highly durable, elastic, and parallel. The results of the analytic processing should be persisted for data mining.

Which architecture outlined below will meet the initial requirements for the collection platform?

- A. Utilize S3 to collect the inbound sensor data, analyze the data from S3 with a daily scheduled Data Pipeline, and save the results to a Redshift Cluster.
- B. Utilize Amazon Kinesis to collect the inbound sensor data, analyze the data with Kinesis clients, and save the results to a Redshift cluster using EMR.
- C. Utilize SQS to collect the inbound sensor data, analyze the data from SQS with Amazon Kinesis, and save the results to a Microsoft SQL Server RDS instance.
- D. Utilize EMR to collect the inbound sensor data, analyze the data from EMR with Amazon Kinesis, and save the results to DynamoDB.

**Answer: B**

**NEW QUESTION 181**

Your company runs a customer-facing event registration site. This site is built with a 3-tier architecture with web and application tier servers and a MySQL database. The application requires 6 web tier servers and 6 application tier servers for normal operation, but can run on a minimum of 65% server capacity and a single MySQL database. When deploying this application in a region with three availability zones (AZs), which architecture provides high availability?

- A. A web tier deployed across 2 AZs with 3 EC2 (Elastic Compute Cloud) instances in each AZ inside an Auto Scaling Group behind an ELB (elastic load balancer), and an application tier deployed across 2 AZs with 3 EC2 instances in each AZ inside an Auto Scaling Group behind an ELB, and one RDS (Relational Database Service) instance deployed with read replicas in the other AZ.
- B. A web tier deployed across 3 AZs with 2 EC2 (Elastic Compute Cloud) instances in each AZ inside an Auto Scaling Group behind an ELB (elastic load balancer), and an application tier deployed across 3 AZs with 2 EC2 instances in each AZ inside an Auto Scaling Group behind an ELB, and one RDS (Relational Database Service) instance deployed with read replicas in the two other AZs.
- C. A web tier deployed across 2 AZs with 3 EC2 (Elastic Compute Cloud) instances in each AZ inside an Auto Scaling Group behind an ELB (elastic load balancer), and an application tier deployed across 2 AZs with 3 EC2 instances in each AZ inside an Auto Scaling Group behind an ELB and a Multi-AZ RDS (Relational Database Service) deployment.
- D. A web tier deployed across 3 AZs with 2 EC2 (Elastic Compute Cloud) instances in each AZ inside an Auto Scaling Group behind an ELB (elastic load balancer), and an application tier deployed across 3 AZs with 2 EC2 instances in each AZ inside an Auto Scaling Group behind an ELB.
- E. And a Multi-AZ RDS (Relational Database Service) deployment.

**Answer: D**

**Explanation:**

Amazon RDS Multi-AZ Deployments

Amazon RDS Multi-AZ deployments provide enhanced availability and durability for Database (DB) Instances, making them a natural fit for production database workloads. When you provision a Multi-AZ DB Instance, Amazon RDS automatically creates a primary DB Instance and synchronously replicates the data to a standby instance in a different Availability Zone (AZ). Each AZ runs on its own physically distinct, independent infrastructure, and is engineered to be highly reliable. In case of an infrastructure failure (for example, instance hardware failure, storage failure, or network disruption), Amazon RDS performs an automatic failover to the standby, so that you can resume database operations as soon as the failover is complete. Since the endpoint for your DB Instance remains the same after a failover, your application can resume database operation without the need for manual administrative intervention.

Enhanced Durability

Multi-AZ deployments for the MySQL, Oracle, and PostgreSQL engines utilize synchronous physical replication to keep data on the standby up-to-date with the primary. Multi-AZ deployments for the SQL Server engine use synchronous logical replication to achieve the same result, employing SQL Server-native Mirroring technology. Both approaches safeguard your data in the event of a DB Instance failure or loss of an Availability Zone.

If a storage volume on your primary fails in a Multi-AZ deployment, Amazon RDS automatically initiates a failover to the up-to-date standby. Compare this to a Single-AZ deployment: in case of a Single-AZ database failure, a user-initiated point-in-time-restore operation will be required. This operation can take several hours to complete, and any data updates that occurred after the latest restorable time (typically within the last five minutes) will not be available.

Amazon Aurora employs a highly durable, SSD-backed virtualized storage layer purpose-built for database workloads. Amazon Aurora automatically replicates your volume six ways, across three Availability Zones. Amazon Aurora storage is fault-tolerant, transparently handling the loss of up to two copies of data without



affecting database write availability and up to three copies without affecting read availability. Amazon Aurora storage is also self-healing. Data blocks and disks are continuously scanned for errors and replaced automatically.

#### Increased Availability

You also benefit from enhanced database availability when running Multi-AZ deployments. If an Availability Zone failure or DB Instance failure occurs, your availability impact is limited to the time automatic failover takes to complete: typically under one minute for Amazon Aurora and one to two minutes for other database engines (see the RDS FAQ for details).

The availability benefits of Multi-AZ deployments also extend to planned maintenance and backups. In the case of system upgrades like QS patching or DB Instance scaling, these operations are applied first on

the standby, prior to the automatic failover. As a result, your availability impact is, again, only the time required for automatic failover to complete.

Unlike Single-AZ deployments, I/O activity is not suspended on your primary during backup for Multi-AZ deployments for the MySQL, Oracle, and PostgreSQL engines, because the backup is taken from the standby. However, note that you may still experience elevated latencies for a few minutes during backups for Multi-AZ deployments.

On instance failure in Amazon Aurora deployments, Amazon RDS uses RDS Multi-AZ technology to automate failover to one of up to 15 Amazon Aurora Replicas you have created in any of three Availability Zones. If no Amazon Aurora Replicas have been provisioned, in the case of a failure, Amazon RDS will attempt to create a new Amazon Aurora DB instance for you automatically.

#### NEW QUESTION 182

An International company has deployed a multi-tier web application that relies on DynamoDB in a single region. For regulatory reasons they need disaster recovery capability in a separate region with a Recovery Time Objective of 2 hours and a Recovery Point Objective of 24 hours. They should synchronize their data on a regular basis and be able to provision the web application rapidly using CloudFormation.

The objective is to minimize changes to the existing web application, control the throughput of DynamoDB used for the synchronization of data and synchronize only the modified elements.


Which design would you choose to meet these requirements?

- A. Use AWS data Pipeline to schedule a DynamoDB cross region copy once a day.
- B. Create a 'Last updated' attribute in your DynamoDB table that would represent the timestamp of the last update and use it as a filter.
- C. Use EMR and write a custom script to retrieve data from DynamoDB in the current region using a SCAN operation and push it to DynamoDB in the second region.
- D. Use AWS data Pipeline to schedule an export of the DynamoDB table to S3 in the current region once a day then schedule another task immediately after it that will import data from S3 to DynamoDB in the other region.
- E. Send also each item into an SNS queue in the second region; use an auto-scaling group behind the SNS queue to replay the write in the second region.

**Answer: A**

#### NEW QUESTION 187

Refer to the architecture diagram above of a batch processing solution using Simple Queue Service (SQS) to set up a message queue between EC2 instances which are used as batch processors. CloudWatch monitors the number of Job requests (queued messages) and an Auto Scaling group adds or deletes batch processors automatically based on parameters set in CloudWatch alarms. You can use this architecture to implement which of the following features in a cost effective and efficient manner?

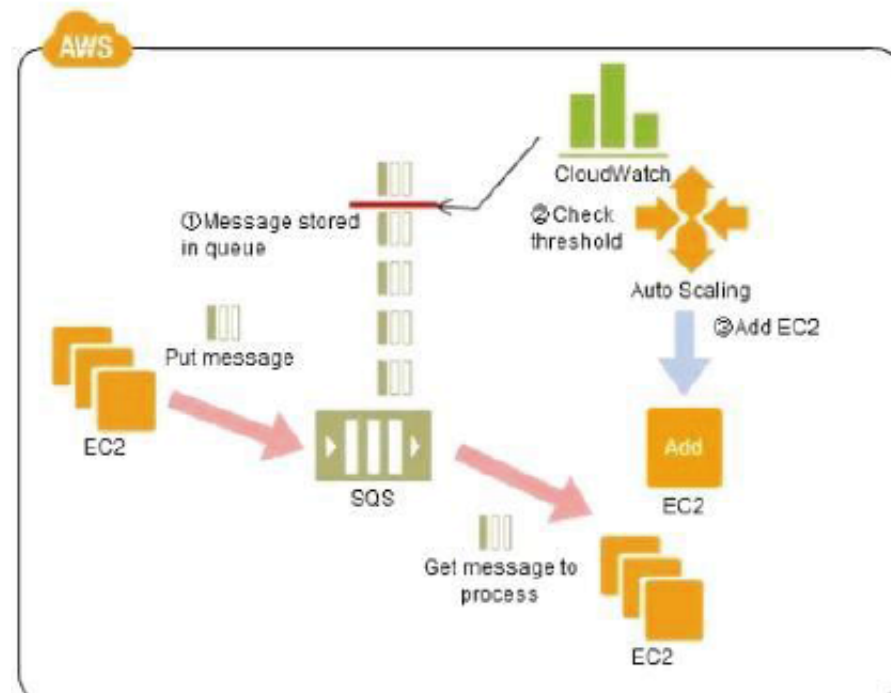

- A. Reduce the overall time for executing jobs through parallel processing by allowing a busy EC2 instance that receives a message to pass it to the next instance in a daisy-chain setup.
- B. Implement fault tolerance against EC2 instance failure since messages would remain in SQS and work can continue with recovery of EC2 instances. Implement fault tolerance against SQS failure by backing up messages to S3.
- C. Implement message passing between EC2 instances within a batch by exchanging messages through SQS.
- D. Coordinate number of EC2 instances with number of job requests automatically thus improving cost effectiveness.
- E. Handle high priority jobs before lower priority jobs by assigning a priority metadata field to SQS messages.

**Answer: D**

#### Explanation:

Reference:

There are cases where a large number of batch jobs may need processing, and where the jobs may need to be re-prioritized.

For example, one such case is one where there are differences between different levels of services for unpaid users versus subscriber users (such as the time until publication) in services enabling, for example, presentation files to be uploaded for publication from a web browser. When the user uploads a presentation file, the conversion processes, for example, for publication are performed as batch

processes on the system side, and the file is published after the conversion. Is it then necessary to be able to assign the level of priority to the batch processes for each type of subscriber.

Explanation of the Cloud Solution/Pattern

A queue is used in controlling batch jobs. The queue need only be provided with priority numbers. Job requests are controlled by the queue, and the job requests

in the queue are processed by a batch server. In Cloud computing, a highly reliable queue is provided as a service, which you can use to structure a highly reliable batch system with ease. You may prepare multiple queues depending on priority levels, with job requests put into the queues depending on their priority levels, to apply prioritization to batch processes. The performance (number) of batch servers corresponding to a queue must be in accordance with the priority level thereof.

#### Implementation

In AWS, the queue service is the Simple Queue Service (SQS). Multiple SQS queues may be prepared to prepare queues for individual priority levels (with a priority queue and a secondary queue).

Moreover, you may also use the message Delayed Send function to delay process execution. Use SQS to prepare multiple queues for the individual priority levels. Place those processes to be executed immediately (job requests) in the high priority queue. Prepare numbers of batch servers, for processing the job requests of the queues, depending on the priority levels.

Queues have a message "Delayed Send" function. You can use this to delay the time for starting a process.

#### Configuration

##### Benefits

You can increase or decrease the number of servers for processing jobs to change automatically the processing speeds of the priority queues and secondary queues.

You can handle performance and service requirements through merely increasing or decreasing the number of EC2 instances used in job processing.

Even if an EC2 were to fail, the messages (jobs) would remain in the queue service, enabling processing to be continued immediately upon recovery of the EC2 instance, producing a system that is robust to failure.

##### Cautions

Depending on the balance between the number of EC2 instances for performing the processes and the number of messages that are queued, there may be cases where processing in the secondary queue may be completed first, so you need to monitor the processing speeds in the primary queue and the secondary queue.

### NEW QUESTION 188

Your startup wants to implement an order fulfillment process for selling a personalized gadget that needs an average of 3-4 days to produce with some orders taking up to 6 months you expect 10 orders per day on your first day. 1000 orders per day after 6 months and 10,000 orders after 12 months.

Orders coming in are checked for consistency then dispatched to your manufacturing plant for production quality control packaging shipment and payment processing. If the product does not meet the quality standards at any stage of the process employees may force the process to repeat a step. Customers are notified via email about order status and any critical issues with their orders such as payment failure.

Your case architecture includes AWS Elastic Beanstalk for your website with an RDS MySQL instance for customer data and orders.

How can you implement the order fulfillment process while making sure that the emails are delivered reliably?

- A. Add a business process management application to your Elastic Beanstalk app servers and re-use the RDS database for tracking order status use one of the Elastic Beanstalk instances to send emails to customers.
- B. Use SWF with an Auto Scaling group of actMty workers and a decider instance in another Auto Scaling group with min/max=1 Use the decider instance to send emails to customers.
- C. Use SWF with an Auto Scaling group of actMty workers and a decider instance in another Auto Scaling group with min/max=1 use SES to send emails to customers.
- D. Use an SOS queue to manage all process tasks Use an Auto Scaling group of EC2 Instances that poll the tasks and execute the
- E. Use SES to send emails to customers.

**Answer: C**

### NEW QUESTION 192

You are designing the network infrastructure for an application server in Amazon VPC. Users will access all the application instances from the Internet as well as from an on-premises network. The on-premises network is connected to your VPC over an AWS Direct Connect link.

How would you design routing to meet the above requirements?

- A. Configure a single routing Table with a default route via the Internet gateway Propagate a default route via BGP on the AWS Direct Connect customer route
- B. Associate the routing table with all VPC subnets.
- C. Configure a single routing table with a default route via the internet gateway Propagate specific routes for the on-premises networks via BGP on the AWS Direct Connect customer router Associate the routing table with all VPC subnets.
- D. Configure a single routing table with two default routes: one to the internet via an Internet gateway the other to the on-premises network via the VPN gateway use this routing table across all subnets in your VPC,
- E. Configure two routing tables one that has a default route via the Internet gateway and another that has a default route via the VPN gateway Associate both routing tables with each VPC subnet.

**Answer: A**

### NEW QUESTION 193

You are designing Internet connectivity for your VPC. The Web servers must be available on the Internet. The application must have a highly available architecture. Which alternatives should you consider? (Choose 2 answers)

- A. Configure a NAT instance in your VPC Create a default route via the NAT instance and associate it with all subnets Configure a DNS A record that points to the NAT instance public IP address.
- B. Configure a CloudFront distribution and configure the origin to point to the private IP addresses of your Web servers Configure a Route53 CNAME record to your Cloud Front distribution.
- C. Place all your web servers behind ELB Configure a Route53 CNAME to point to the ELB DNS name.
- D. Assign EIPs to all web server
- E. Configure a Route53 record set with all EIP
- F. With health checks and DNS failover.
- G. Configure ELB with an EIP Place all your Web servers behind ELB Configure a Route53 A record that points to the EIP.

**Answer: CD**

### NEW QUESTION 194

You are tasked with moving a legacy application from a virtual machine running inside your datacenter to an Amazon VPC. Unfortunately this app requires access to a number of on-premises services and no one who configured the app still works for your company. Even worse there's no documentation for it. What will allow the application running inside the VPC to reach back and access its internal dependencies without being reconfigured? (Choose 3 answers)



- A. An AWS Direct Connect link between the VPC and the network housing the internal services.
- B. An Internet Gateway to allow a VPN connection.
- C. An Elastic IP address on the VPC instance
- D. An IP address space that does not conflict with the one on-premises
- E. Entries in Amazon Route 53 that allow the Instance to resolve its dependencies' IP addresses
- F. A VM Import of the current virtual machine

**Answer:** ADF

**Explanation:**

AWS Direct Connect

AWS Direct Connect makes it easy to establish a dedicated network connection from your premises to AWS. Using AWS Direct Connect, you can establish private connectivity between AWS, your datacenter, office, or colocation environment, which in many cases can reduce your network costs, increase bandwidth throughput, and provide a more consistent network experience than Internet based connections.

AWS Direct Connect lets you establish a dedicated network connection between your network and one of the AWS Direct Connect locations. Using industry standard 802.1q VLANs, this dedicated connection can be partitioned into multiple virtual interfaces. This allows you to use the same connection to access public resources such as objects stored in Amazon S3 using public IP address space, and private resources such as Amazon EC2 instances running within an Amazon Virtual Private Cloud (VPC) using private IP space, while maintaining network separation between the public and private environments. Virtual interfaces can be reconfigured at any time to meet your changing needs.

What is AWS Direct Connect?

AWS Direct Connect links your internal network to an AWS Direct Connect location over a standard 1 gigabit or 10 gigabit Ethernet fiber-optic cable. One end of the cable is connected to your router, the other to an AWS Direct Connect router. With this connection in place, you can create virtual interfaces directly to the AWS cloud (for example, to Amazon Elastic Compute Cloud (Amazon EC2) and Amazon Simple Storage Service (Amazon S3)) and to Amazon Virtual Private Cloud (Amazon VPC), bypassing Internet service providers in your network path. An AWS Direct Connect location provides access to Amazon Web Services in the region it is associated with, as well as access to other US regions. For example, you can provision a single connection to any AWS Direct Connect location in the US and use it to access public AWS services in all US Regions and AWS GovCloud (US).

The following diagram shows how AWS Direct Connect interfaces with your network.

Requirements

To use AWS Direct Connect, your network must meet one of the following conditions:

Your network is colocated with an existing AWS Direct Connect location. For more information on available AWS Direct Connect locations, go to <http://aws.amazon.com/directconnect/>.

You are working with an AWS Direct Connect partner who is a member of the AWS Partner Network (APN). For a list of AWS Direct Connect partners who can help you connect, go to <http://aws.amazon.com/directconnect>

You are working with an independent service provider to connect to AWS Direct Connect. In addition, your network must meet the following conditions:

Connections to AWS Direct Connect require single mode fiber, 1000BASE-LX (1310nm) for 1 gigabit Ethernet, or 10GBASE-LR (1310nm) for 10 gigabit Ethernet.

Auto Negotiation for the port must be disabled. You must support 802.1Q VLANs across these connections.

Your network must support Border Gateway Protocol (BGP) and BGP MD5 authentication. Optionally, you may configure Bidirectional Forwarding Detection (BFD).

To connect to Amazon Virtual Private Cloud (Amazon VPC), you must first do the following: Provide a private Autonomous System Number (ASN). Amazon allocates a private IP address in the 169.x.x.x range to you.

Create a virtual private gateway and attach it to your VPC. For more information about creating a virtual private gateway, see Adding a Hardware Virtual Private Gateway to Your VPC in the Amazon VPC User Guide.

To connect to public AWS products such as Amazon EC2 and Amazon S3, you need to provide the following:

A public ASN that you own (preferred) or a private ASN.

Public IP addresses (/31) (that is, one for each end of the BGP session) for each BGP session. If you do not have public IP addresses to assign to this connection, log on to AWS and then open a ticket with AWS Support.

The public routes that you will advertise over BGP.

**NEW QUESTION 196**

Your company produces customer commissioned one-of-a-kind skiing helmets combining high fashion with custom technical enhancements. Customers can show off their individuality on the ski slopes and have access to head-up-displays. GPS rear-view cams and any other technical innovation they wish to embed in the helmet.

The current manufacturing process is data rich and complex including assessments to ensure that the custom electronics and materials used to assemble the helmets are to the highest standards. Assessments are a mixture of human and automated assessments; you need to add a new set of assessment to model the failure modes of the custom electronics using GPUs with CUDA, across a cluster of servers with low latency networking.

What architecture would allow you to automate the existing process using a hybrid approach and ensure that the architecture can support the evolution of processes over time?

- A. Use AWS Data Pipeline to manage movement of data & meta-data and assessments. Use an autoscaling group of G2 instances in a placement group.
- B. Use Amazon Simple Workflow (SWF) to manage assessments, movement of data & meta-data. Use an auto-scaling group of G2 instances in a placement group.
- C. Use Amazon Simple Workflow (SWF) to manage assessments. Use movement of data & meta-data. Use an auto-scaling group of C3 instances with SR-IOV (Single Root I/O Virtualization).
- D. Use AWS Data Pipeline to manage movement of data & meta-data and assessments. Use an autoscaling group of C3 with SR-IOV (Single Root I/O virtualization).

**Answer:** B

**NEW QUESTION 197**

You require the ability to analyze a large amount of data, which is stored on Amazon S3 using Amazon Elastic MapReduce. You are using the cc2.8xlarge Instance type, whose CPUs are mostly idle during processing. Which of the below would be the most cost efficient way to reduce the runtime of the job?

- A. Create more smaller files on Amazon S3.
- B. Add additional cc2.8xlarge instances by introducing a task group.
- C. Use smaller instances that have higher aggregate I/O performance.
- D. Create fewer, larger files on Amazon S3.

**Answer:** C

**NEW QUESTION 202**

Your website is serving on-demand training videos to your workforce. Videos are uploaded monthly in high resolution MP4 format. Your workforce is distributed globally often on the move and using company-provided tablets that require the HTTP Live Streaming (HLS) protocol to watch a video. Your company has no video transcoding expertise and it required you may need to pay for a consultant.

How do you implement the most cost-efficient architecture without compromising high availability and quality of video delivery'?

- A. A video transcoding pipeline running on EC2 using SQS to distribute tasks and Auto Scaling to adjust the number of nodes depending on the length of the queue
- B. EBS volumes to host videos and EBS snapshots to incrementally backup original files after a few day
- C. CloudFront to serve HLS transcoded videos from EC2.
- D. Elastic Transcoder to transcode original high-resolution MP4 videos to HL
- E. EBS volumes to host videos and EBS snapshots to incrementally backup original files after a few day
- F. CloudFront to serve HLS transcoded videos from EC2.
- G. Elastic Transcoder to transcode original high-resolution NIP4 videos to HL
- H. 53 to host videos with Lifecycle Management to archive original files to Glacier after a few day
- I. CloudFront to serve HLS transcoded videos from 53.
- J. A video transcoding pipeline running on EC2 using SQS to distribute tasks and Auto Scaling to adjust the number of nodes depending on the length of the queue
- K. 53 to host videos with Lifecycle Management to archive all files to Glacier after a few day
- L. CloudFront to serve HLS transcoded videos from Glacier.

**Answer: C**

#### NEW QUESTION 205

You currently operate a web application In the AWS US-East region The application runs on an autoscaled layer of EC2 instances and an RDS Multi-AZ database Your IT security compliance officer has tasked you to develop a reliable and durable logging solution to track changes made to your EC2. IAM And RDS resources. The solution must ensure the integrity and confidentiality of your log data. Which of these solutions would you recommend?

- A. Create a new CloudTrail trail with one new S3 bucket to store the logs and with the global services option selected Use IAM roles S3 bucket policies and Multi Factor Authentication (MFA) Delete on the S3 bucket that stores your logs.
- B. Create a new CloudTrail with one new S3 bucket to store the logs Configure SNS to send log file delivery notifications to your management system Use IAM roles and S3 bucket policies on the S3 bucket that stores your logs.
- C. Create a new CloudTrail trail with an existing S3 bucket to store the logs and with the global services option selected Use S3 ACLs and Multi Factor Authentication (MFA) Delete on the S3 bucket that stores your logs.
- D. Create three new CloudTrail trails with three new S3 buckets to store the logs one for the AWS Management console, one for AWS SDKs and one for command line tools Use IAM roles and S3 bucket policies on the S3 buckets that store your logs.

**Answer: A**

#### NEW QUESTION 209

An enterprise wants to use a third-party SaaS application. The SaaS application needs to have access to issue several API commands to discover Amazon EC2 resources running within the enterprise's account The enterprise has internal security policies that require any outside access to their environment must conform to the principles of least privilege and there must be controls in place to ensure that the credentials used by the SaaS vendor cannot be used by any other third party. Which of the following would meet all of these conditions?

- A. From the AWS Management Console, navigate to the Security Credentials page and retrieve the access and secret key for your account.
- B. Create an IAM user within the enterprise account assign a user policy to the IAM user that allows only the actions required by the SaaS application create a new access and secret key for the user and provide these credentials to the SaaS provider.
- C. Create an IAM role for cross-account access allows the SaaS provider's account to assume the role and assign it a policy that allows only the actions required by the SaaS application.
- D. Create an IAM role for EC2 instances, assign it a policy that allows only the actions required for the SaaS application to work, provide the role ARN to the SaaS provider to use when launching their application instances.

**Answer: C**

#### Explanation:

Granting Cross-account Permission to objects It Does Not Own

In this example scenario, you own a bucket and you have enabled other AWS accounts to upload objects. That is, your bucket can have objects that other AWS accounts own.

Now, suppose as a bucket owner, you need to grant cross-account permission on objects, regardless of who the owner is, to a user in another account. For example, that user could be a billing application that needs to access object metadata. There are two core issues:

The bucket owner has no permissions on those objects created by other AWS accounts. So for the bucket owner to grant permissions on objects it does not own, the object owner, the AWS account that created the objects, must first grant permission to the bucket owner. The bucket owner can then delegate those permissions.

Bucket owner account can delegate permissions to users in its own account but it cannot delegate permissions to other AWS accounts, because cross-account delegation is not supported.

In this scenario, the bucket owner can create an AWS Identity and Access Management (IAM) role with permission to access objects, and grant another AWS account permission to assume the role temporarily enabling it to access objects in the bucket.

Background: Cross-Account Permissions and Using IAM Roles

IAM roles enable several scenarios to delegate access to your resources, and cross-account access is

one of the key scenarios. In this example, the bucket owner, Account A, uses an IAM role to temporarily delegate object access cross-account to users in another AWS account, Account C. Each IAM role you create has two policies attached to it:

A trust policy identifying another AWS account that can assume the role.

An access policy defining what permissions—for example, s3:GetObject—are allowed when someone assumes the role. For a list of permissions you can specify in a policy, see Specifying Permissions in a Policy.

The AWS account identified in the trust policy then grants its user permission to assume the role. The user can then do the following to access objects:

Assume the role and, in response, get temporary security credentials. Using the temporary security credentials, access the objects in the bucket.

For more information about IAM roles, go to Roles (Delegation and Federation) in IAM User Guide. The following is a summary of the walkthrough steps:

Account A administrator user attaches a bucket policy granting Account B conditional permission to upload objects.

Account A administrator creates an IAM role, establishing trust with Account C, so users in that account can access Account A. The access policy attached to the role limits what user in Account C can do when the user accesses Account A.

Account B administrator uploads an object to the bucket owned by Account A, granting full control permission to the bucket owner.

Account C administrator creates a user and attaches a user policy that allows the user to assume the role. User in Account C first assumes the role, which returns the user temporary security credentials.

Using those temporary credentials, the user then accesses objects in the bucket.

For this example, you need three accounts. The following table shows how we refer to these accounts and the administrator users in these accounts. Per IAM guidelines (see About Using an Administrator User to Create Resources and Grant Permissions) we do not use the account root credentials in this walkthrough. Instead, you create an administrator user in each account and use those credentials in creating resources and granting them permissions

#### NEW QUESTION 210

You are designing a data leak prevention solution for your VPC environment. You want your VPC Instances to be able to access software depots and distributions on the Internet for product updates. The depots and distributions are accessible via third party CONs by their URLs. You want to explicitly deny any other outbound connections from your VPC instances to hosts on the internet.

Which of the following options would you consider?

- A. Configure a web proxy server in your VPC and enforce URL-based ru les for outbound access Removedefault routes.
- B. Implement security groups and configure outbound rules to only permit traffic to software depots.
- C. Move all your instances into private VPC subnets remove default routes from all routing tables and add specific routes to the software depots and distributions only.
- D. Implement network access control lists to all specific destinations, with an Implicit deny as a rul

**Answer:** A

#### NEW QUESTION 212

You have an application running on an EC2 Instance which will allow users to download fl ies from a private 53 bucket using a pre-assigned URL. Before generating the URL the application should verify the existence of the fi le in 53.

How should the application use AWS credentials to access the 53 bucket securely?

- A. Use the AWS account access Keys the application retrieves the credentials from the source code of the application.
- B. Create an IAM user for the application with permissions that allow list access to the 53 bucket launch the instance as the IAM user and retrieve the IAM user's credentials from the EC2 instance user data.
- C. Create an IAM role for EC2 that allows list access to objects in the 53 bucke
- D. Launch the instance with the role, and retrieve the role's credentials from the EC2 Instance metadata
- E. Create an IAM user for the application with permissions that allow list access to the 53 bucke
- F. The application retrieves the IAM user credentials from a temporary directory with permissions that allow read access only to the application user.

**Answer:** C

#### NEW QUESTION 215

You are designing a social media site and are considering how to mitigate distributed denial-of service (DDoS) attacks. Which of the below are viable mitigation techniques? (Choose 3 answers)

- A. Add multiple elastic network interfaces (ENIs) to each EC2 instance to increase the network bandwidth.
- B. Use dedicated instances to ensure that each instance has the maximum performance possible.
- C. Use an Amazon C|oudFront distribution for both static and dynamic content.
- D. Use an Elastic Load Balancer with auto scaling groups at the we
- E. App and Amazon Relational Database Service (RDS) tiers
- F. Add alert Amazon CloudWatch to look for high Network in and CPU utilization.
- G. Create processes and capabilities to quickly add and remove rules to the instance OS firewal

**Answer:** CEF

#### NEW QUESTION 218

Your fortune 500 company has under taken a TCO analysis evaluating the use of Amazon 53 versus acquiring more hardware The outcome was that ail employees would be granted access to use Amazon 53 for storage of their personal documents.

Which of the following will you need to consider so you can set up a solution that incorporates single sign-on from your corporate AD or LDAP directory and restricts access for each user to a designated user folder in a bucket? (Choose 3 Answers)

- A. Setting up a federation proxy or identity provider
- B. Using AWS Security Token Service to generate temporary tokens
- C. Tagging each folder in the bucket
- D. Configuring IAM role
- E. Setting up a matching IAM user for every user in your corporate directory that needs access to a folder in the bucket

**Answer:** ABD

#### NEW QUESTION 222

Your company policies require encryption of sensitive data at rest. You are considering the possible options for protecting data while storing it at rest on an EBS data volume, attached to an EC2 instance. Which of these options would allow you to encrypt your data at rest? (Choose 3 answers)

- A. Implement third party volume encryption tools
- B. Do nothing as EBS volumes are encrypted by default
- C. Encrypt data inside your applications before storing it on EBS
- D. Encrypt data using native data encryption drivers at the file system level
- E. Implement SSL/TLS for all services running on the server

**Answer:** ACD

#### NEW QUESTION 224

To serve Web traffic for a popular product your chief financial officer and IT director have purchased 10 ml large heavy utilization Reserved Instances (RIs) evenly



spread across two availability zones:

Route 53 is used to deliver the traffic to an Elastic Load Balancer (ELB). After several months, the product grows even more popular and you need additional capacity. As a result, your company purchases two C3.2xlarge medium utilization RIs. You register the two c3 2xlarge instances with your ELB and quickly find that the ml large instances are at 100% of capacity and the c3 2xlarge instances have significant capacity that's unused. Which option is the most cost effective and uses EC2 capacity most effectively?

- A. Use a separate ELB for each instance type and distribute load to ELBs with Route 53 weighted round robin
- B. Configure Autoscaling group and Launch Configuration with ELB to add up to 10 more on-demand ml large instances when triggered by Cloudwatch shut off c3 2xlarge instances
- C. Route traffic to EC2 ml large and c3 2xlarge instances directly using Route 53 latency based routing and health checks shut off ELB
- D. Configure ELB with two c3 2xlarge Instances and use on-demand Autoscaling group for up to two additional c3.2xlarge instances Shut on ml .large instances.

**Answer: D**

#### NEW QUESTION 229

You are developing a new mobile application and are considering storing user preferences in AWS. This would provide a more uniform cross-device experience to users using multiple mobile devices to access the application. The preference data for each user is estimated to be 50KB in size. Additionally 5 million customers are expected to use the application on a regular basis. The solution needs to be cost-effective, highly available, scalable and secure, how would you design a solution to meet the above requirements?

- A. Setup an RDS MySQL instance in 2 availability zones to store the user preference data
- B. Deploy a public facing application on a server in front of the database to manage security and access credentials
- C. Setup a DynamoDB table with an item for each user having the necessary attributes to hold the user preference
- D. The mobile application will query the user preferences directly from the DynamoDB table
- E. Utilize STS
- F. Web Identity Federation, and DynamoDB Fine Grained Access Control to authenticate and authorize access.
- G. Setup an RDS MySQL instance with multiple read replicas in 2 availability zones to store the user preference data. The mobile application will query the user preferences from the read replica
- H. Leverage the MySQL user management and access privilege system to manage security and access credentials.
- I. Store the user preference data in S3. Setup a DynamoDB table with an item for each user and an item attribute pointing to the user's S3 object
- J. The mobile application will retrieve the S3 URL from DynamoDB and then access the S3 object directly utilize STS, Web identity Federation, and S3 ACLs to authenticate and authorize access.

**Answer: B**

#### NEW QUESTION 232

You must assign each server to at least \_\_ security group

- A. 3
- B. 2
- C. 4
- D. 1

**Answer: A**

#### NEW QUESTION 237

Before I delete an EBS volume, what can I do if I want to recreate the volume later?

- A. Create a copy of the EBS volume (not a snapshot)
- B. Store a snapshot of the volume
- C. Download the content to an EC2 instance
- D. Back up the data in to a physical disk

**Answer: B**

#### NEW QUESTION 238

Fill in the blanks: Resources that are created in AWS are identified by a unique identifier called an

- A. Amazon Resource Number
- B. Amazon Resource Name tag
- C. Amazon Resource Name
- D. Amazon Resource Namespace

**Answer: C**

#### NEW QUESTION 240

Every user you create in the IAM system starts with \_\_

- A. Partial permissions
- B. Full permissions
- C. No permissions

**Answer: C**

#### NEW QUESTION 241

In the Amazon CloudWatch, which metric should I be checking to ensure that your DB Instance has enough free storage space?



- A. Free Storage
- B. Free Storage Space
- C. Free Storage Volume
- D. Free DB Storage Space

**Answer:** B

**NEW QUESTION 246**

Groups can't \_.

- A. be nested more than 3 levels
- B. be nested at all
- C. be nested more than 4 levels
- D. be nested more than 2 levels

**Answer:** B

**NEW QUESTION 249**

Which is the default region in AWS?

- A. eu-west-1
- B. us-east-1
- C. us-east-2
- D. ap-southeast-1

**Answer:** B

**NEW QUESTION 251**

What are the two types of licensing options available for using Amazon RDS for Oracle?

- A. BYOL and Enterprise License
- B. BYOL and License Included
- C. Enterprise License and License Included
- D. Role based License and License Included

**Answer:** B

**NEW QUESTION 255**

EBS Snapshots occur \_

- A. Asynchronously
- B. Synchronously
- C. Weekly

**Answer:** A

**NEW QUESTION 256**

Can Amazon S3 uploads resume on failure or do they need to restart?

- A. Restart from beginning
- B. You can resume them, if you flag the "resume on failure" option before uploading.
- C. Resume on failure
- D. Depends on the file size

**Answer:** C

**NEW QUESTION 260**

What is the durability of S3 RRS?

- A. 99.99%
- B. 99.95%
- C. 99.995%
- D. 99.999999999%

**Answer:** A

**NEW QUESTION 261**

Is Federated Storage Engine currently supported by Amazon RDS for MySQL?

- A. Only for Oracle RDS instances
- B. No
- C. Yes
- D. Only in VPC

**Answer:** B

**NEW QUESTION 265**

Is there a limit to how many groups a user can be in?

- A. Yes for all users
- B. Yes for all users except root
- C. No
- D. Yes unless special permission granted

**Answer:** A

**NEW QUESTION 270**

A/An \_ acts as a firewall that controls the traffic allowed to reach one or more instances.

- A. security group
- B. ACL
- C. IAM
- D. Private IP Addresses

**Answer:** A

**NEW QUESTION 275**

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### AWS-Solution-Architect-Associate Practice Exam Features:

- \* AWS-Solution-Architect-Associate Questions and Answers Updated Frequently
- \* AWS-Solution-Architect-Associate Practice Questions Verified by Expert Senior Certified Staff
- \* AWS-Solution-Architect-Associate Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* AWS-Solution-Architect-Associate Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The AWS-Solution-Architect-Associate Practice Test Here](#)**