

Exam Questions OmniStudio-Developer

Salesforce Certified OmniStudio Developer (SU21)

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>



NEW QUESTION 1

A developer writes an OmniScript that includes a DataRaptor that updates the Account statue based on information provided from the OmniScript. The information must be updated only if the Account record already exists. Otherwise, a new account must be created.

How should the developer accomplish this task?

- A. Populate the Lookup object and Lookup fields
- B. Check the Upset key and is required for Upsert checkboxes on the Account id field
- C. Check the Upsert key checkbox on the Account Status field
- D. Check Overwrite Target for all Null input checkbox on the Account id field

Answer: B

NEW QUESTION 2

What should a developer's first step be when troubleshooting whether a DataRaptor Extract is retrieving data?

- A. Go to the Lightning Console and reload the page to test.
- B. Go to the PREVIEW tab In OmniScript to test.
- C. Deactivate the card and layout,and go to the PREVIEW tab for the card to test.
- D. Add a key/value pair in the DataRaptor to test it.

Answer: D

NEW QUESTION 3

A developer is configuring a DataRaptor Load to Save contract data. The developer needs to set the record type of the contact using DeveloperName. Which two configuration actions should the developer take to set this up in the DataRaptor Load?

- A. Check is Lookup property when mapping the fields.
- B. Add Link to RecordType object in the Contact Object with the id field of RecordType object.
- C. Select RecordType in theLookup object lis
- D. Development in the lookup Field list, and ID in the Lookup Requested Field list.
- E. Select RecordType in the Lookup Object lis
- F. ID in the Lookup Field list, and Development in the Lookup requested Field list.

Answer: AC

NEW QUESTION 4


A developer has a requirement to create a child FlexCard that contains all of its parent FlexCard's records In a Datable How should the developer configure the parent FlexCard's Node?

- A. {Records{0}}
- B. {Records}
- C. {Params, records}
- D. {Recorded}

Answer: C

NEW QUESTION 5

What is the reason for this? Refer to the exhibit below.

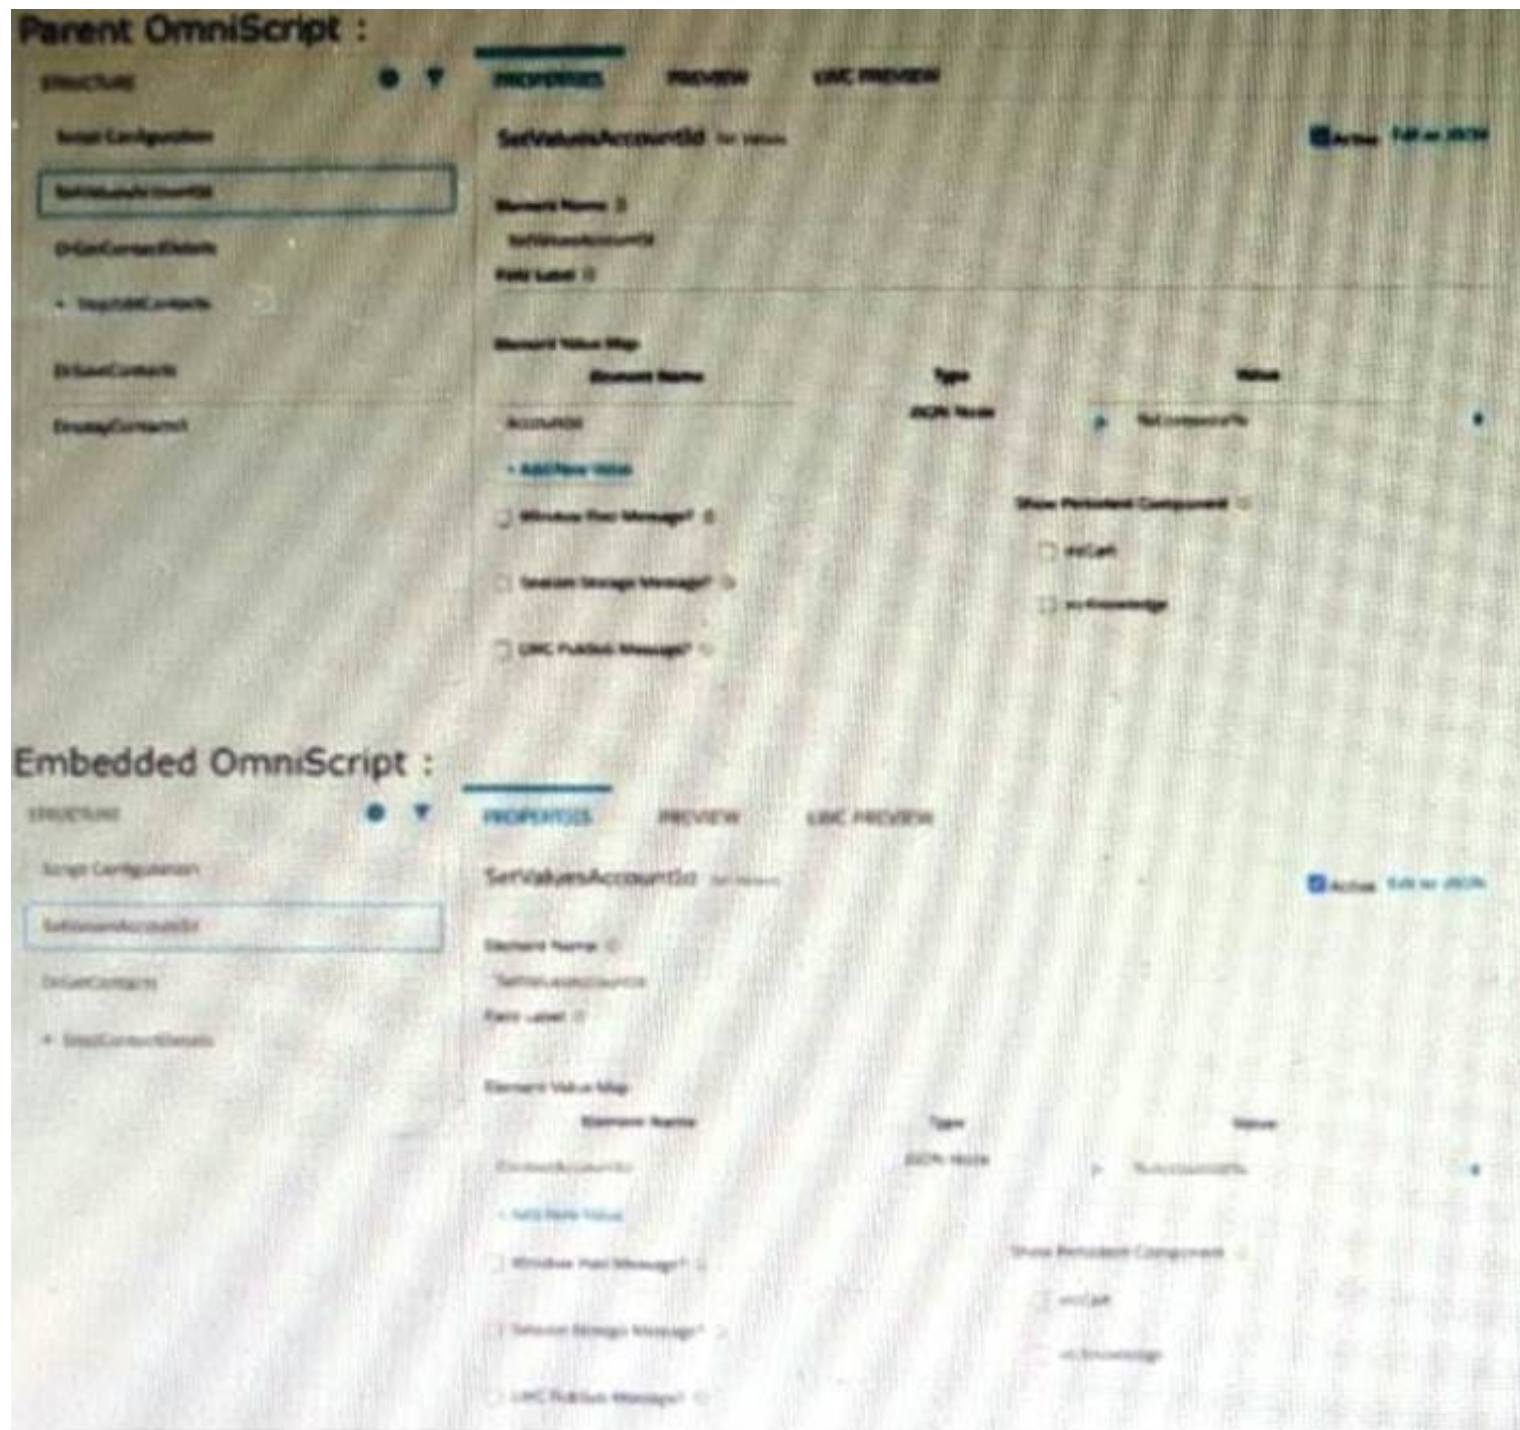

- A. The WLC PubSub Message flag in the Set Values action of the parent OmniScript has not been set.
- B. The flag passData.JSON in the parent OmniScript is not configured correctly.
- C. A developer failed to include a Navigate Action Element to pass data from the parent OmniScript.
- D. Both parent and embedded OmniScripts have the same element name for the Set Values element.

Answer: C

NEW QUESTION 6

A developer needs to build a multi-step intake form. Each step must allow the user to cancel the intake at any time. The developer is using an LWC OmniScript to build the form.

How should the developer implement the cancel functionality for all steps using the LWC OmniScript Designer?

- A. Check the Enable Cancel checkbox in the Setup tab under Cancel Options.
- B. Add a navigation Action inside each step and set the Component name to "Cancel",
- C. Add a navigation Action outside each step and set the Element Name to "Cancel",
- D. Add a navigation Action inside each step and set the ElementName to "Cancel",

Answer: A

NEW QUESTION 7

A developer builds a new OmniScript. It contains a Set Values element with a ContextId key/value pair that was used during testing. What should the developer do before moving the OmniScript to a production org?

- A. Update the ContextId value to specify an id from the Production org.
- B. Add a Show/Hide condition on the Set Values element.
- C. Delete or Deactivate the Set Values element.
- D. Deactivate the contextId key/value pair

Answer: B

NEW QUESTION 8

A developer needs to change some field labels on a FlexCard. The FlexCard is currently deployed to production. The developer that the best course of action is to version the FlexCard rather than cloning it.

Which factor would lead the developer to this decision?

- A. The new version of the FlexCard will be used in a new Console, and the current version of the FlexCard should remain unchanged.

- B. Another team member is developing new action, fields and styling for the current version of the FlexCard.
- C. The new and current versions will be displayed together on the same target.
- D. All instance of the FlexCard must be updated with the changes.

Answer: B

NEW QUESTION 9

..... configure Additional input to send exactly the same data?
Assume that the develop checked Send Only Additional input.

▼ SEND/RESPONSE TRANSFORMATIONS

Send JSON Path ⓘ	Send JSON Node ⓘ
DRExtractAction Account	SecondaryAccount
Response JSON Path ⓘ	Response JSON Node

A)

Key	Value
SecondaryAccount	!DRExtractAction:Account!

B)

Key	Value
DRExtractAction:Account	SecondaryAccount

C)

Key	Value
!DRExtractAction:Account!	SecondaryAccount

D)

Key	Value
SecondaryAccount	[DRExtractAction]Account

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 10

A developer needs to build a DataRaptor Transform to send current weather to both an OmniScript Card Layout. Which of these samples would be valid for the Expected Output JSON?

- A)
- ```
{
 "Current:TempF": 53.1,
 "Current:citystate": "Baltimore, MD",
 "Current:TempF": 14.6
}
```
- B)
- ```
{
  "current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempF": 14.6
  }
}
```
- C)


```
<root>
  <Current>
    <TempF>53.1</TempF>
    <CityState>Baltimore, MD</CityState>
    <TempC>14.6</TempC>
  </Current>
</root>
```

D)

```
{
  "Current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempC": 14.6
  }
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 10

A developer needs to display the following information together on one FlexCard:

- * Account name, address, phone number, website
- * Primary contact first name, contact name, address, phone number,email

The account information must always be visible, and the contact information should only be visible as needed by the user.

What approach should the developer use to display the contact information on the card?

- A. Use a Datatable element
- B. Set the class" collapsible" on the block element
- C. Set the collapsible property on the block element
- D. Use a conditional FlexCard State

Answer: C

NEW QUESTION 15

An integration procedure contains a Remote Action element that calls a method of an APEX class. The method requires two fields are input: AccountId and ProductId. The integration Procedure data JSONcontains the following nodes:

How should the Remote Action element be configured to pass the data correctly to the method?

- A. Check the Send Only Additional Input checkbox, and the following/ value pairs to Additional input:

```
* AccountId: %AccountId%
* ProductId: %Details:ProductId%
```

- B. Set Return Only AdditionalOutput to true, and add the following Key/Value pairs to additional input.

```
* AccountId: %AccountId%
* ProductId: %Details:ProductId%
```

- C. Check the DataRaptor Transform checkbox, and add the following Key/Value pairs to Output JSON Path:

```
* AccountId: %AccountId%
* ProductId: %Details:ProductId%
```

- D. Add the following to Send JSON Path: accountId: %Accountd% ProductId%Details Products%

Answer: B

NEW QUESTION 16

A developer is troubleshooting an Integration Procedure with two elements: A Remote Action named FetchCart and a Response Action namedResponseCart. In Preview, what JSON node shows the data sent to the Response Action?

- A. FetchCart
- B. Response
- C. ResponseCartDebug
- D. ResponseCart

Answer: C

NEW QUESTION 19

Which two of these options can a developer use to retrieve data from a Salesforce object? Choose 2 answers

- A. A DataRaptor Load Action
- B. A DataRaptor Extract Action
- C. A Lookup Input Element
- D. A DataRapt or Post Action

Answer: BD

NEW QUESTION 22

A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy Community portal. The developer on the project decides to use an OmniScript.

How should the developer configure the OmniScript to provide this functionality?

- A. Use an Edit Block element configured with Remote Actions.
- B. Use an Edit Block element configured with SOQL statements.
- C. Use an Input Block element and a DataRaptor Post Action element.
- D. Use a Text Block element and a Remote Action element.

Answer: A

NEW QUESTION 24

Refer to the exhibit.



A)

```
"Step1": {
  "Block1": {
    "Text1": "Text",
    "Block2": {
      "Telephone1": "1234567890",
      "Checkbox1": false
    }
  },
  "Block3": {
    "Multi-select1": "Value A;Value B"
  }
}
```

B)

```
"Step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890",
    "Block2": {
      "Checkbox1": false
    }
  },
  "Block3": {
  }
}
```

A. Option A

B. Option B

Answer: A

NEW QUESTION 28

A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions, which are represented by more than 20 different FlexCards.

What is the most efficient way for the developer to configure the action that invokes the OmniScript?

- A. As an OS Action
- B. As a Custom Action
- C. As an OmniStudio Action
- D. As a Lightning Action

Answer: C

NEW QUESTION 32

A developer is configuring the API URL in an HTTP Action element within an Integration procedure. What is the merge code syntax for passing a Date node from an element named SetValue in the URL?


- A. x%SetValue.Date%

- B. (' Setvalues'] ['Date']
- C. %SetValues Date
- D. {(SetValue
- E. Date)}

Answer: C

NEW QUESTION 34

Refer to the exhibit.

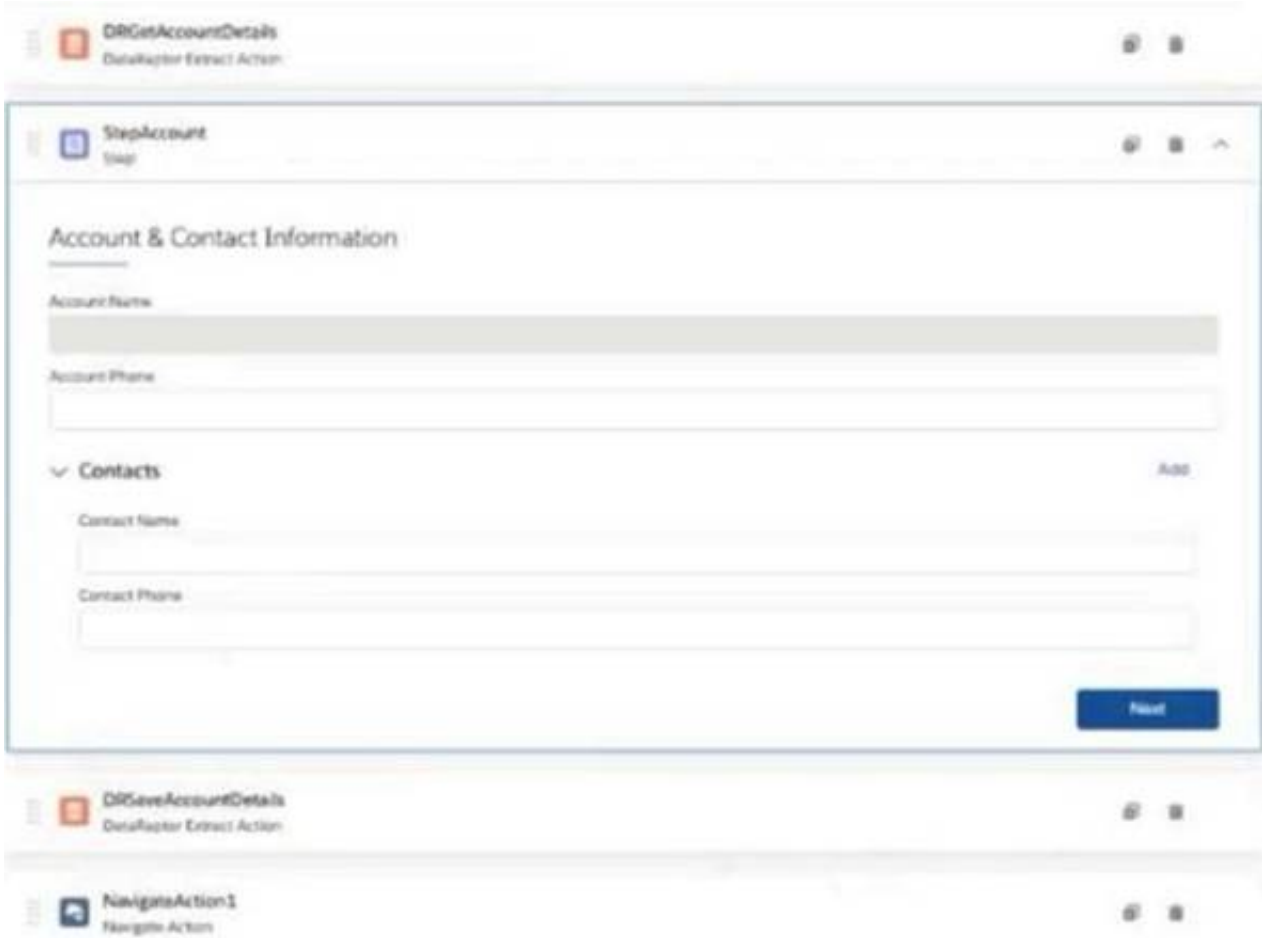

What JSON from the DRGetAccountDetails action would display all six values correctly in the OmniScript structure shown? BlkContacts is a Repeat Block.

A)

```
{
  "Contacts": [{
    "ContactPhone": "(212) 169-1475",
    "ContactName": "Edward Stamos"
  }, {
    "ContactPhone": "(212) 189-8979",
    "ContactName": "Leanne Tomlin"
  }],
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}
```

B)

```
{
  "ContactPhone": "(212) 169-1475",
  "ContactName": "Edward Stamos",
  "ContactPhone": "(212) 189-8979",
  "ContactName": "Leanne Tomlin",
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}
```

C)

```
{
  "BlkContacts": [{
    "ContactPhone": "(212) 169-1475",
    "ContactName": "Edward Stamos"
  }, {
    "ContactPhone": "(212) 189-8979",
    "ContactName": "Leanne Tomlin"
  }],
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}
```

D)

```
{
  "BlkContacts": [{
    "Phone": "(212) 169-1475",
    "Name": "Edward Stamos"
  }, {
    "Phone": "(212) 189-8979",
    "Name": "Leanne Tomlin"
  }],
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 36

A developer is creating a FlexCard and needs to display additional information using a Flyout. Which two types of components can the developer embed in the flyout?

Choose 2 answer

- A. An OmniScript
- B. An Integration Procedure
- C. A DataRaptor
- D. A Child FlexCard

Answer: BD

NEW QUESTION 41

A developer configure a Flexcard with a DataRaptor data source that uses the params.id as an. When the developer clicks Views Data on the FlexCard, valid data displays. However, when the developer previews the layout, the FlexCard does not display. What could cause this error?

Choose 2 answers

- A. The Data Node field for the FlexCard is empty.
- B. The RecordId in the Test Data Source settings ins for the wrong record type.
- C. The attribute haven't been configured to pass the data to the fields.
- D. There is not Salesforce record for the FlexCard based on the RecordId in the layout's Test Data Source Settings.

Answer: BC

NEW QUESTION 46

A developer needs to create a list of cases for an account in a single Datable in a FlexCard. Like the one shown below.

Origin	Type	Subject	Status	Created	Case Number	Priority
Web	Mechanical	Generator won't start	New	2020-07-22T00:22:42.000Z	00001028	High
Phone	Electrical	Component missing	Escalated	2020-07-22T00:21:41.000Z	00001027	High
Phone	Electrical	Starting generator after electrical failure	Escalated	2020-02-27T22:28:20.000Z	00001000	High
Web	Other	Easy installation process	Closed	2020-02-27T22:28:20.000Z	00001003	Low
Web	Mechanical	Shutting down of generator	Closed	2020-02-27T22:28:20.000Z	00001017	Medium
Phone	Electrical	Cannot start generator after electrical failure	Closed	2020-02-27T22:28:20.000Z	00001018	Medium

How can the developer configure the FlexCard to display the case records in this way?

- A. Enable the record Looping feature on the data table elements
- B. Select the Repeatable Mode property on the data table elements
- C. Enable the Repeat Records feature on the FlexCard Setup tab
- D. Disable the Repeat Record feature on the FlexCard setup tab

Answer: D

NEW QUESTION 47

A developer creates a DataRaptor Extract to retrieve data to pass to an external service. The external service expects the field value to be integer. However, the DataRaptor is sending it as a string.


Which action can the developer take to fix this?

- A. In the DataRaptor Output tab, select the Output Data Type of that field to Integer.
- B. In the DataRaptor Output tab, enter the default value as 0 on the field.
- C. In the DataRaptor Extract tab, set the Input Data Type field to Integer.
- D. In the DataRaptor Formula tab, define a formula using the function TOINTEGER and use the formula as output.

Answer: A

NEW QUESTION 50

Refer to the exhibit.

Input Data	Output Data
ProductCode (Text) 	BasePrice (a)
<input type="text" value="Search column"/>	<input type="text" value="Search column"/>
ACC154	10.23
CAA876B	20.36
HRA320	12.99
HRA320B	13.99

All inputs to the Calculation Matric are set correctly.
The Calculation Matrix has the following input:

```
{
  "input": {
    "ProductCode": "HRA320"
  }
}
```

What is the output?

- A. Null
- B. 13.99
- C. 12.99,13.99
- D. 12.99

Answer: D

NEW QUESTION 53

Refer to the exhibit below.

STRUCTURE
Procedure Configuration
DRReadCase
HTTPGetCaseDetails
DRXformCaseData
ResponseAction

What is the marge code needed for this integration procedure structure to pass a CaseNumber node from the DRReadCase DataRaptor Extract Action to the HTTP Action's HTTP URL?

- A. %DRReadCase: CaseNumber%
- B. ((DRRCase,CaseNumber))
- C. MTTOPDetCaseDetail: CaseNumber%
- D. ((CaseNumber))

Answer: A

NEW QUESTION 56

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual OmniStudio-Developer Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the OmniStudio-Developer Product From:

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>

Money Back Guarantee

OmniStudio-Developer Practice Exam Features:

- * OmniStudio-Developer Questions and Answers Updated Frequently
- * OmniStudio-Developer Practice Questions Verified by Expert Senior Certified Staff
- * OmniStudio-Developer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * OmniStudio-Developer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year