



UiPath

Exam Questions UiPath-ARDv1

UiPath Advanced RPA Developer v1.0 Exam (UiARD)

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

- (Topic 1)

What represents an example of a full selector?

- A. <webctrl href='/studio/docs/about-licensing' parented='hub-sidebar-content' tag='A' /><webctrl parented='hub-sidebar-content' tag='SPAN' />
- B. <ctrl name='File' role='popup menu' /><ctrl automationid='6' />
- C. <html app='chrome.exe' title='Full versus Partial Selectors' /><webctrl aaname='About Selectors' parentid='content-container' tag='A' />
- D. <wnd aaname='Explorer Pane' cls='DirectUIHWND' /><ctrl automationid='System.ItemNameDisplay' />

Answer: D

NEW QUESTION 2

- (Topic 1)

A developer is working on an automation. The automated process must log into Citrix and click on the "Generate Shipment Details" button. Ideally, this generates a table of shipping records. If the generated table displays only the header row and no data is available, then it should be marked as an exception since the data is incomplete.

What is this type of exception?

- A. BusinessException
- B. NullReferenceException
- C. ApplicationException
- D. SystemException

Answer: B

NEW QUESTION 3

- (Topic 1)

You want to automate a process on the <https://acme-test.uipath.com/work-items> web page. On this page, the following table is displayed:

Search Results						
Please find below your work items. They need to be completed in the order specified by your manager.						
Actions	WIID	Description	Type	Status	Date	
 	649871	Verify Account Position	WI1	Open	2018-11-30	
 	635853	Process Vendor Invoice	WI3	Open	2019-03-12	
 	580174	Generate Yearly Report for Vendor	WI4	Open	2019-03-15	
 	884652	Research Client Check Copy	WI2	Open	2018-03-10	
 	202471	Verify Account Position	WI1	Open	2019-11-14	
 	656171	Verify Account Position	WI1	Open	2019-08-05	
 	910891	Verify Account Position	WI1	Open	2017-03-13	
 	207652	Research Client Check Copy	WI2	Open	2019-01-23	
 	815321	Verify Account Position	WI1	Open	2018-01-28	
 	628122	Research Client Check Copy	WI2	Open	2017-07-16	

You observe that the selector of the element highlighted in red is:

```
<html app='chrome.exe' title='ACME System 1 - Work Items' />
<webctrl tag='TABLE' />
<webctrl tag='TD' tableCol='2' tableRow='2' />
```

What is a valid selector to get the 5-th element in the WIID column?

- A. <html app='chrome.exe' title='ACME System 1 - Work Items' /><webctrl tag='TABLE' /><webctrl tag='TD' tableCol='6' tableRow='2' />
- B. <html app='chrome.exe' title='ACME System 1 - Work Items' /><webctrl tag='TABLE' /><webctrl tag='TD' tableCol='2' tableRow='5' />
- C. <html app='chrome.exe' title='ACME System 1 - Work Items' /><webctrl tag='TABLE' /><webctrl tag='TD' tableCol='2' tableRow='6' />
- D. <html app='chrome.exe' title='ACME System 1 - Work Items' /><webctrl tag='TABLE' /><webctrl tag='TD' tableCol='5' tableRow='2' />

Answer: C

NEW QUESTION 4

- (Topic 1)

A developer wants to ensure that a process they are developing includes coherent logs with meaningful log messages. During the execution of the process, an application exception is caught and stored in a local variable called exception.

Based on UiPath best practices, how should the Log Message activity in the Catch section of this exception be configured?


- A. Level: WarnMessage: exception.Message + "at" + exception.Source
- B. Level: ErrorMessage: "Exception occurred at" + exception.Source
- C. Level: FatalMessage: exception.Message
- D. Level: InfoMessage: "Application Exception at" + exception.Source

Answer: C

NEW QUESTION 5

- (Topic 1)

You have two variables, varA and varB, as shown in the following exhibit:

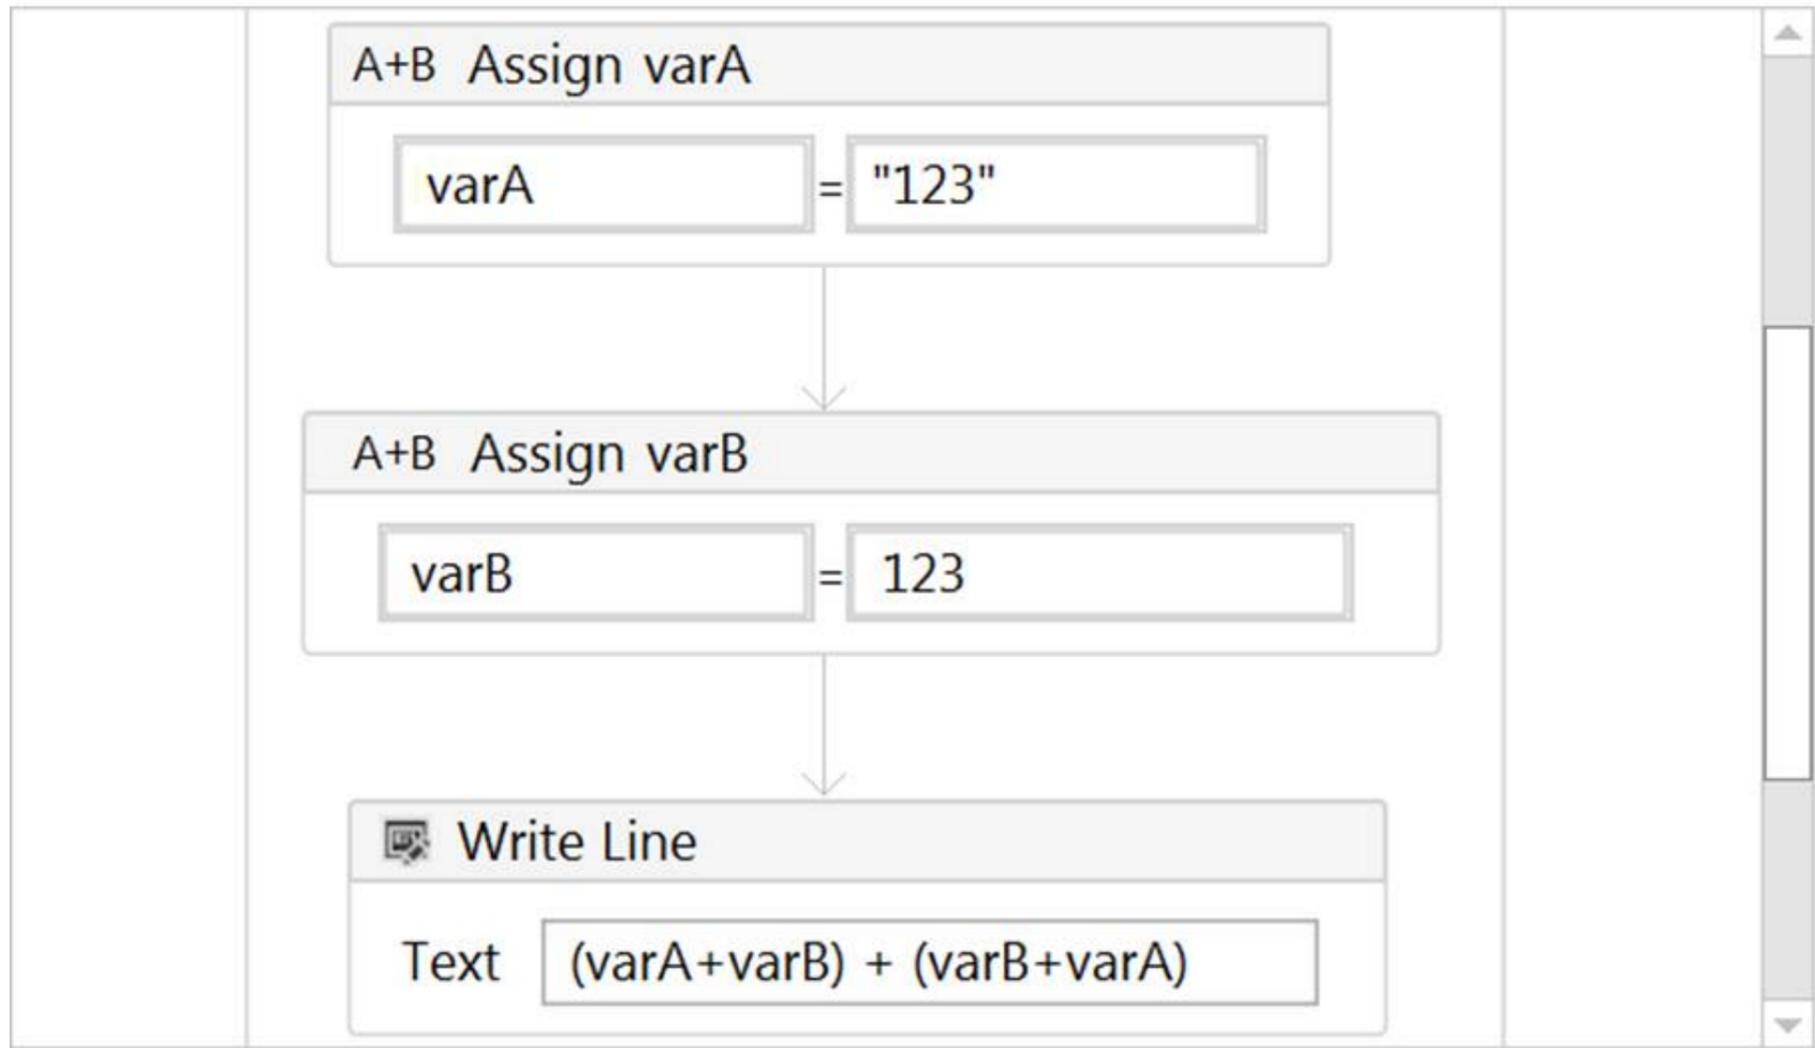

Name	Variable type	Scope	Default
varA	GenericValue	Sequence	<i>Enter a VB expression</i>
varB	GenericValue	Sequence	<i>Enter a VB expression</i>
<i>Create Variable</i>			

What is the output of the Write Line activity?

- A. 246246
- B. 123123246
- C. 246123123
- D. 123123123123

Answer: D

NEW QUESTION 6

- (Topic 1)

A developer automates a process which has an Excel file as input data; however, Orchestrator is not available. As a result, the developer needs to adapt the Robotic Enterprise (RE) Framework for use with tabular data.

Based on UiPath best practices, where should the Excel file be read and stored in a global DataTable variable?

- A. In the new state in the Main.xaml that transitions from Init.
- B. In the InitAllApplications.xaml workflow.
- C. In the Get Transaction Data state in the Main.xaml.
- D. In the Ina state of the Main.xaml in the First Run sequence.

Answer: C

Explanation:

Reference: <https://forum.uipath.com/t/can-we-use-robotic-enterprise-framework-for-small-scenario-like-printing-table-of-5/72507>

NEW QUESTION 7

- (Topic 1)

You are developing a .xaml file to interact with multiple fields of a web page. You want to Auto Empty the fields that require input. Which input method(s) will automatically empty the target input fields?

- A. "SendMessageMessages" only
- B. "Default" and "SimulateType"
- C. "SimulateType" only
- D. "SimulateType" and "SendMessageMessages"

Answer: C

Explanation:

Reference: <https://tutorials4sharepoint.wordpress.com/category/rpa/uiopath/>

NEW QUESTION 8

- (Topic 2)

What status does a job have when a schedule is triggered in Orchestrator, but there are no available robots to execute it?

- A. In progress
- B. Pending
- C. New

Answer: B

NEW QUESTION 9

- (Topic 2)

How can you delay the Automatic Recording? Options are :


- A. By hitting the Escape key
- B. By right clicking
- C. Not possible
- D. By hitting the F2 key

Answer: D

NEW QUESTION 10

- (Topic 2)

A developer uses Read Range and Write Range activities to copy data from one worksheet to another. What will be the value of "A1" cell in "Sheet2" worksheet when the following sequence is executed?

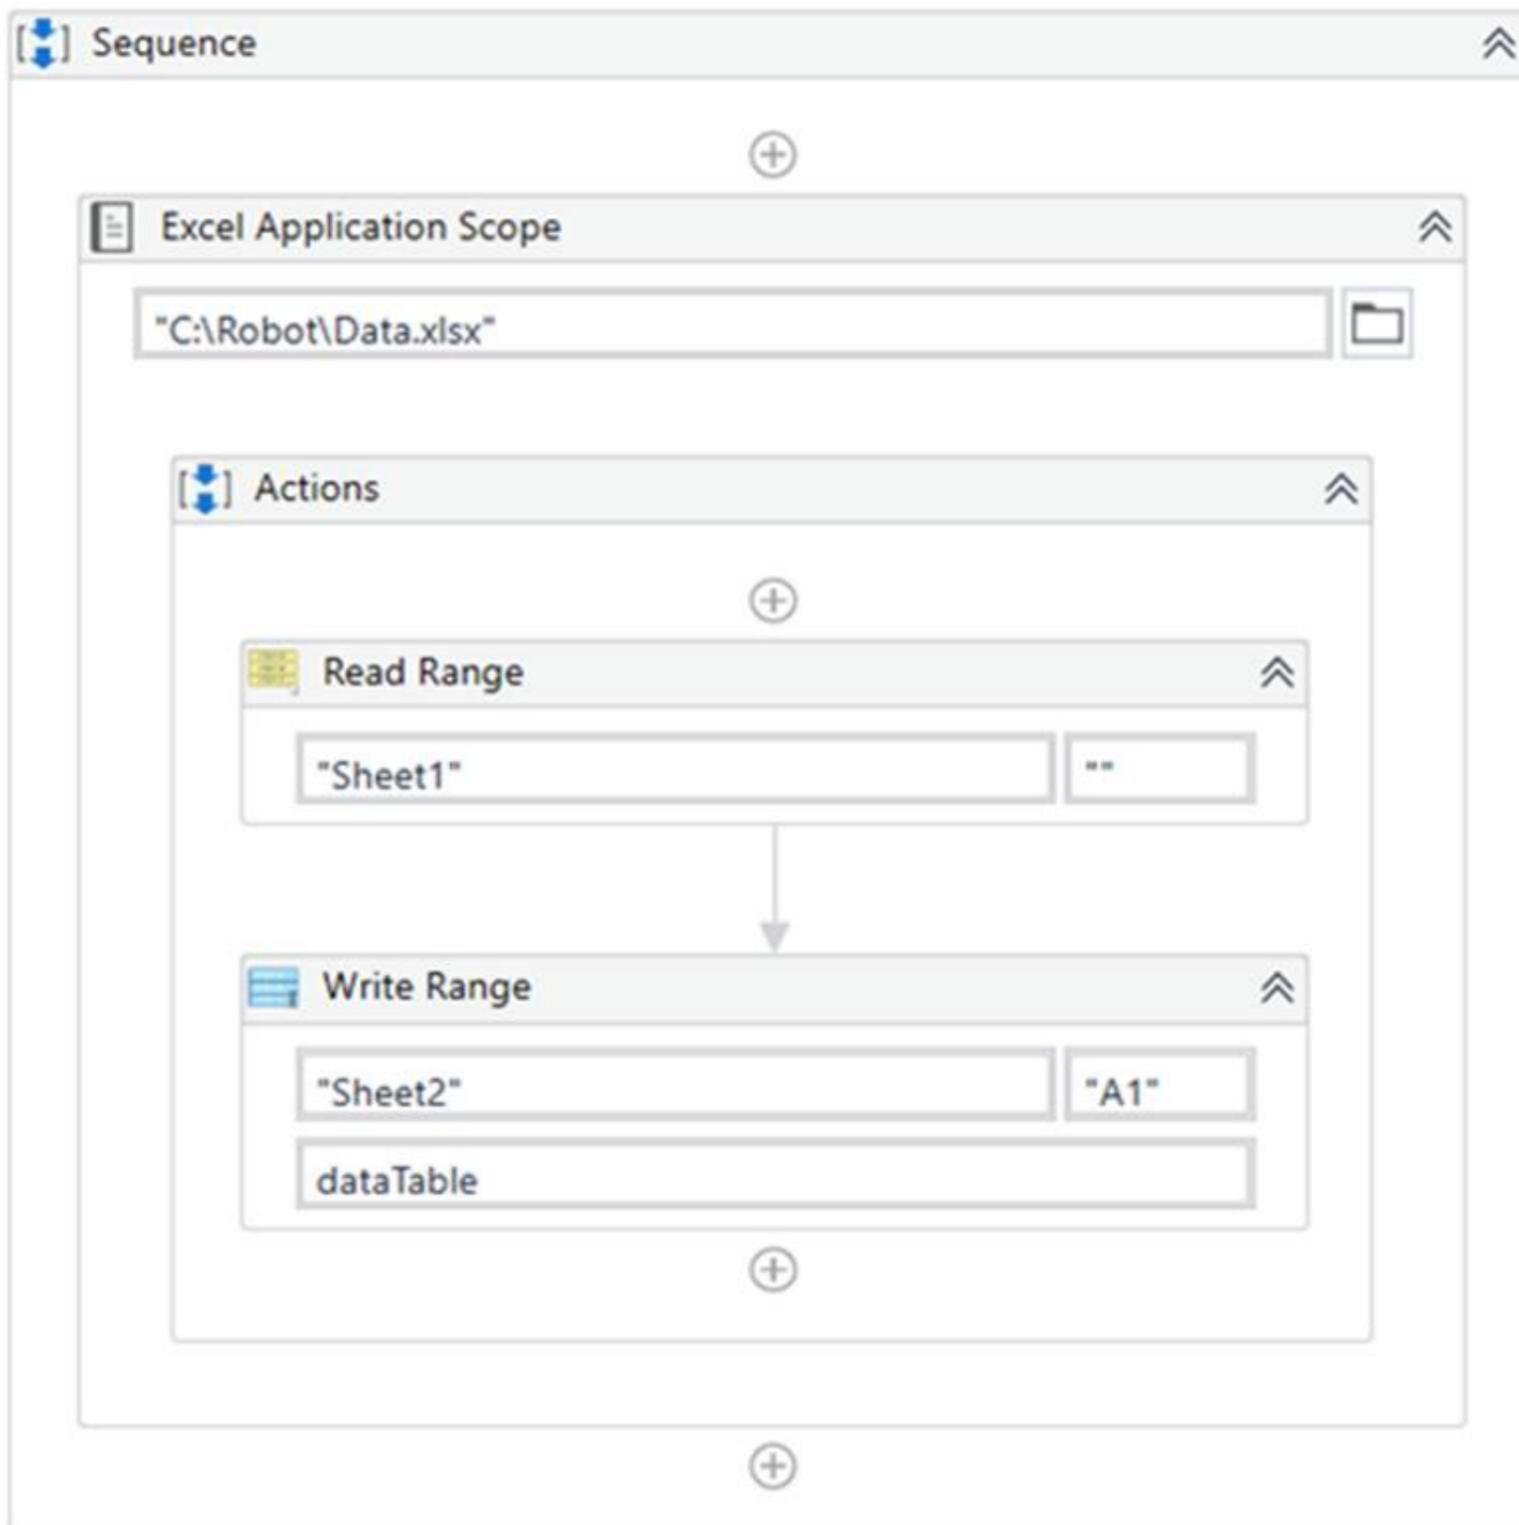

Please find below the properties of the Read Range activity

UiPath.Excel.Activities.ExcelReadRange	
Common	
DisplayName	Read Range
Input	
Range	""
SheetName	"Sheet1"
Misc	
Private	<input type="checkbox"/>
Options	
AddHeaders	<input checked="" type="checkbox"/>
PreserveFormat	<input type="checkbox"/>
UseFilter	<input type="checkbox"/>
Output	
DataTable	dataTable

Please find below the properties of the Write Range activity

UiPath.Excel.Activities.ExcelWriteRange

Common

DisplayName Write Range

Destination

SheetName "Sheet2" ...

StartingCell "A1" ...

Input

DataTable dataTable ...

Misc

Private

Options

AddHeaders

Please find below the data in "Sheet1"

	A	B	C	D
1	Drug Name	Drug Company	State	Phone
2	Hay Fever	Washington Homeopathic Prc	North Carolina	336-143-4463
3	Aspergillus repens	Nelco Laboratories, Inc.	Connecticut	860-187-9159
4	Notatum	USPharmaCo	North Carolina	910-950-2264
5	CEFTIN	GlaxoSmithKline LLC	Texas	469-635-1757
6	Hygienic Cleansing Pads	Kmart Corporation	Colorado	719-567-7345
7	TISSEEL	Baxter Healthcare Corporatio	Maryland	410-878-6998
8	IPRATROPIUM BROMIDE AND ALBUTEROL SULFATE	Ritedose Pharmaceuticals, LL	Texas	281-509-9155

- A. Drug Name
- B. Hay Fever
- C. Column1
- D. Column0

Answer: B

Explanation:

In the Read Range activity, when AddHeaders is selected, the column headers from the specified spreadsheet range are also extracted and set as the column names for the output datatable.

In the Write Range activity, when AddHeaders is selected, column headers are also written to the specified range. Otherwise, everything starting from the first row of the datatable is written to the worksheet (headers are not written).

In this case, robot first sets Drug Name, Drug Company, State and Phone as column names for the output datatable, however doesn't write them in Sheet2, as AddHeaders is not selected in the Write Range activity.

UiPath Documentation Read Range UiPath Documentation Write Range

Exam Topic: Identify and describe how activities are used to automate actions in Excel, e- mail, and .pdfs

NEW QUESTION 10

- (Topic 2)

Where can you trigger an unattended robot from? Select all the options that apply. Options are :

- A. The UiPath Robot icon in the system tray
- B. UiPath Studio
- C. Remotely, from Orchestrator

Answer: AC

NEW QUESTION 11

- (Topic 2)

What type of Output variable do all Get Mail activities return? (POP3, IMAP, Outlook, Exchange)

Options are :

- A. List
- B. List
- C. MailMessage

Answer: B

NEW QUESTION 15

- (Topic 2)

What layout should be used for UI navigation and data processing? Options are :

- A. State Machine
- B. Sequence
- C. Flowchart

Answer: B

NEW QUESTION 20

- (Topic 2)

Which of the following statements are true? Select all the options that apply. Options are :

- A. You cannot use a recorder in a Citrix environment
- B. The recorder is used to create a skeleton for the UI automation
- C. The Desktop recorder generates partial selectors

Answer: BC

NEW QUESTION 21

- (Topic 2)

What will be the value of isEven variable at the breakpoint, once the robot runs in Debug mode?

Name	Variable type	Scope	Default
isEven	Boolean	Sequence	Enter a VB expression

- A. False
- B. True
- C. empty
- D. null

Answer: A

Explanation:

The default value of a Boolean variable is False. As $10 \text{ mod } 2 = 0$ is True, robot will assign True to the isEven variable. However, the processing is paused before executing the activity with a breakpoint. So at the moment of the breakpoint, the value of isEven will still be False, and will be changed once Continue or Step Into button is pressed.

UiPath Documentation

Exam Topic: Examine and describe the activities and/or features used to troubleshoot, debug, and modify processes

NEW QUESTION 23

- (Topic 2)

A developer extracts data about employees from an Excel workbook. The developer uses the following expression to filter the extracted datatable.

`extractedDataTable.Select("[Age]>=21 AND ([Education]='Master' OR [Salary]>100000) AND [Education]='Bachelor'")`

How many rows will be returned as the result of the filtering? Please find below the worksheet with data.

	A	B	C	D	E	F	G
1	First Name	Last Name	Age	Email	Education	Salary	
2	Eric	Morris	22	e.morris@randatmail.com	Master	141214	
3	Adele	West	23	a.west@randatmail.com	Bachelor	115694	
4	Amber	Payne	24	a.payne@randatmail.com	Lower secondary	81527	
5	David	Davis	23	d.davis@randatmail.com	Lower secondary	100244	
6	Lydia	Rogers	23	l.rogers@randatmail.com	Master	50297	
7	Honey	Spencer	21	h.spencer@randatmail.com	Master	120858	
8	Naomi	Roberts	18	n.roberts@randatmail.com	Bachelor	173582	
9	Julia	Campbell	28	j.campbell@randatmail.com	Primary	63435	
10	Tara	Ellis	18	t.ellis@randatmail.com	Lower secondary	133410	
11	Ryan	Gray	24	r.gray@randatmail.com	Master	100962	
12							
13							

- A. 6
- B. 5
- C. 1

Answer: D

Explanation:

The expression [Education]='Master' OR [Salary]>100000 would return all rows except for 4 and 9.
 Next, [Age]>=21 would also eliminate rows 8 and 10.
 Out of the remaining rows, only row 3 has a Bachelor degree, so [Education]='Bachelor' would leave only that 1 row. UiPath forum
 Exam Topic: Describe how to initialize variables such as lists and datatables, and how to filter datatables

NEW QUESTION 26

- (Topic 2)

At the end of the execution of Workflow1, which retrieves some items from a database, is the database connection closed automatically?
 Options are :

- A. Yes, the connection is closed after 30 seconds.
- B. The connection has to be closed using a Disconnect activity.
- C. Only the database admin can decide this aspect.

Answer: B

NEW QUESTION 30

- (Topic 2)

Which activity provides the easiest way to loop through all the rows in a DataTable? Options are :

- A. Repeat Until
- B. For Each Row
- C. For Each
- D. Do While
- E. While

Answer: B

NEW QUESTION 35

- (Topic 2)

Please choose the incorrect statement about the usage of the State Machine activity.

- A. You can directly connect Start and Final State.
- B. Every State activity should have at least 1 transition.
- C. Every State Machine must have a Final State to avoid an infinite loop.
- D. You can only create one initial state, yet it is possible to have more than one Final State.


Answer: A

Explanation:

You can only create one initial state, yet it is possible to have more than one Final State. You can only create one link from Start, so it is impossible to connect more than one initial state to it. However, you can connect a State activity to the different Final States depending on the required conditions.


Every State Machine must have a Final State to avoid an infinite loop. If you interconnect States between each other without a Final State, then the process will enter an infinite loop, which would result in incorrect processing.

Every State activity should have at least 1 transition. If you do not create a transition, a red symbol of an error will appear in the corner of the State.

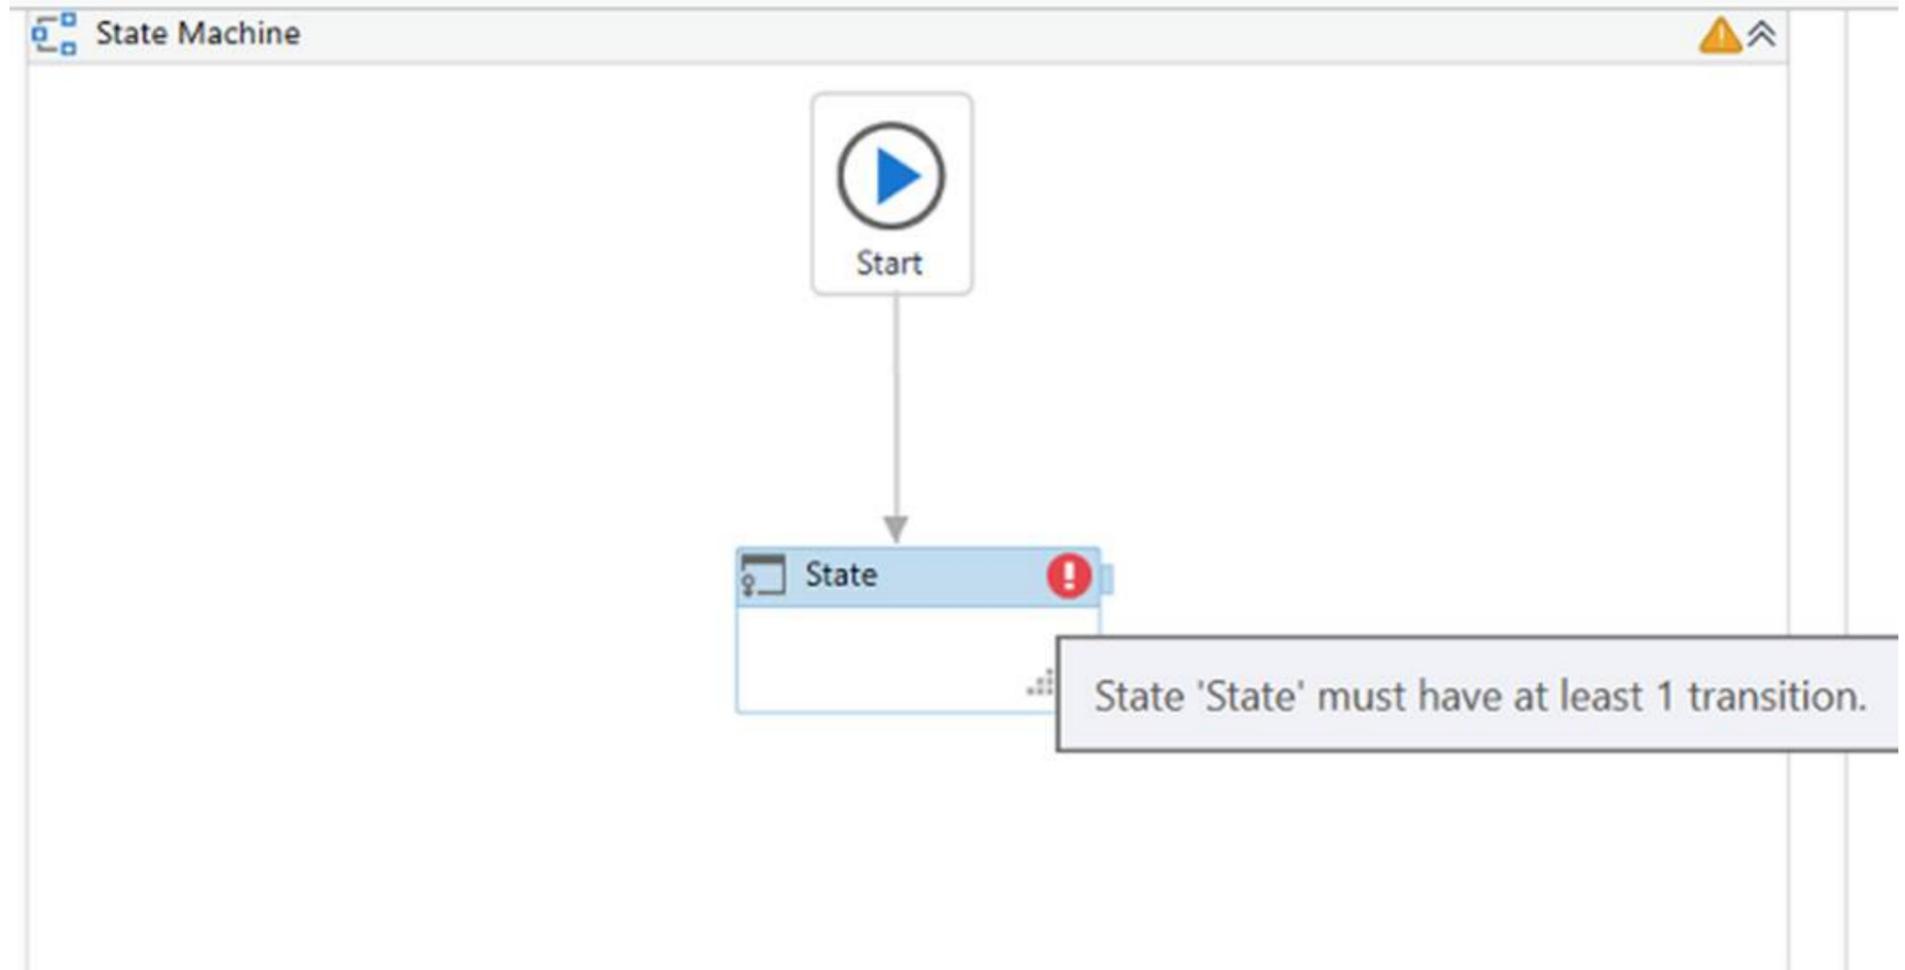

Incorrect statement:

You can directly connect Start and Final State. That is an incorrect statement, as Final State cannot be an initial state. UiPath Studio does not allow to create a link directly from Start to Final State.

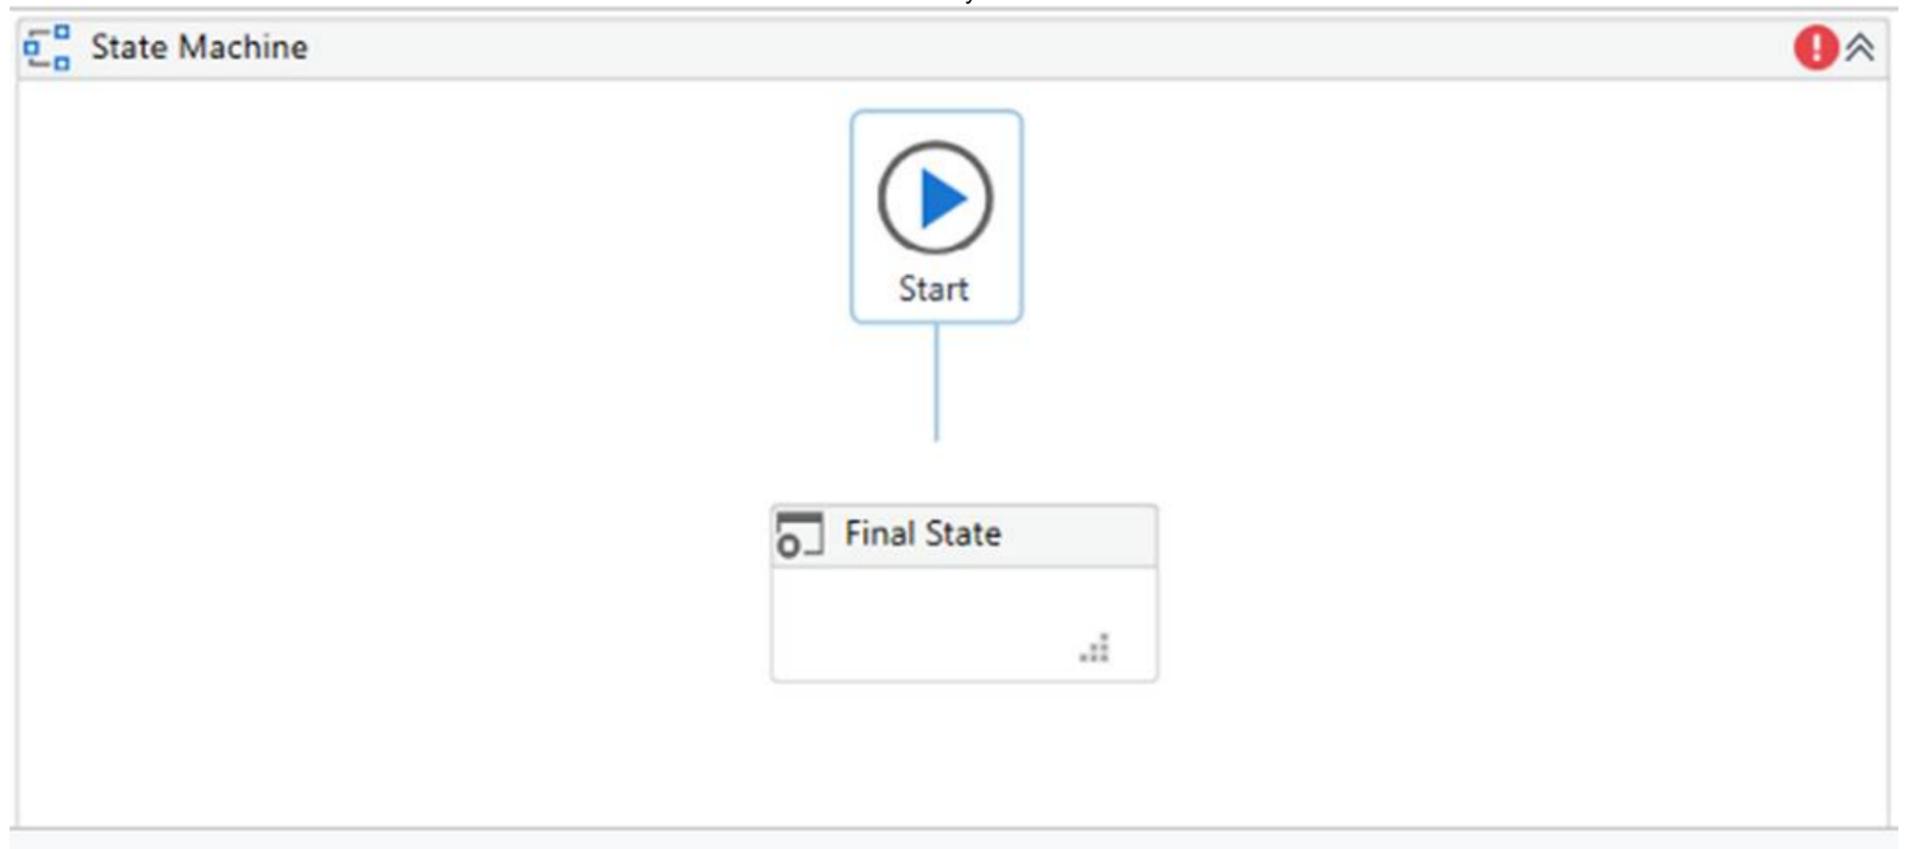

NEW QUESTION 36

- (Topic 2)

Which is the best way to delete unreferenced variables? Options are :

- A. Delete them one by one from the Variables pane
- B. UiPath Studio performs the workflow validation in real time, therefore you can see which variable is being used.
- C. The unreferenced variables do not utilise memory, therefore you do not have to delete them.
- D. You can manage your variables from the Design panel > Manage Variables > Remove Unreferenced.

Answer: C

NEW QUESTION 38

- (Topic 2)

Which button in the Debug ribbon should be enabled to highlight the currently executed step?

- A. Slow Step

- B. Execution Trail
- C. Highlight Elements
- D. Focus

Answer: B

Explanation:

The Execution Trail ribbon button is disabled by default. When enabled, it shows the exact execution path at debugging. As the process is executed, each activity is highlighted and marked in the Designer panel, showing you the execution as it happens:

- executed activities are marked and highlighted in green;
 - activities that were not executed are not marked in any way;
 - activities that threw an exception are marked and highlighted in red. UiPath Documentation
- Exam Topic: Examine and describe the activities and/or features used to troubleshoot and debug projects

NEW QUESTION 42

- (Topic 2)

A developer wants to run a VBA code in Excel using the Execute Macro activity. The developer wants to pass 3 arguments: string value, a value from a Config file and a boolean value. What is the correct setting in the MacroParameters property?

- A. ("Some Text", Config("ValueFromOrchestrator").ToString, TRUE)
- B. {"Some Text", Config("ValueFromOrchestrator").ToString, ??TRUE??}
- C. {"Some Text", Config("ValueFromOrchestrator").ToString, TRUE}
- D. {"Some Text", Config(ValueFromOrchestrator).ToString, TRUE}

Answer: C

Explanation:

To pass parameters to a VBA macro, place values into curly brackets { } in the format that is accepted in the macro (string, integer, boolean and so on).

Example: Write {"Hello", 5} if the macro accepts a string variable and an integer variable. UiPath Forum

UiPath Documentation

NEW QUESTION 46

- (Topic 2)

A developer uses the following selector to extract the title of the invoice opened in the Chrome browser.

```
<wnd app='chrome.exe' title='Invoice *- ???.??.*.pdf' />
```

```
<ctrl name='Page 1' role='pane' />
```

```
<ctrl role='grouping' idx='2' />
```

Which of the following documents would not be recognized by UiPath?

- A. Invoice 1263 - 12.04.2021.pdf
- B. Invoice - 04.04.2021.pdf
- C. Invoice - 17.05.21.pdf
- D. Invoice 4324 - 2.06.2021.pdf

Answer: D

Explanation:

Wildcards are symbols that enable you to replace zero or multiple characters in a string. These can be quite useful when dealing with dynamically-changing attributes in a selector. Asterisk (*) – replaces zero or more characters

Question mark (?) – replaces a single character

Invoice 4324 - 2.06.2021.pdf wouldn't work with Invoice *- ???.??.*.pdf, because it has only 1 character of the day in date, instead of the required 2 characters.

UiPath Documentation

Exam Topic: Determine and describe how robust selectors are created; for example, dynamic versus static selectors

NEW QUESTION 49

- (Topic 2)

In which types of variable can you store text? Options are :

- A. Integer
- B. String
- C. Double
- D. Generic

Answer: BD

NEW QUESTION 52

- (Topic 2)

Please select the incorrect statement about partial selectors.

- A. Activities containing partial selectors can be enclosed in Attach Window activity.
- B. Partial selectors do not contain information about the top-level window.
- C. Partial selectors are recommended when performing multiple actions in the same window.
- D. Partial selectors are generated by the Basic recorder.

Answer: D

Explanation:

Partial selectors are generated by the Desktop recorder. They contain information about the top-level window and are enclosed in Attach Window or Attach Browser activities. It is recommended to use partial selectors when performing multiple actions in the same window.

UiPath Documentation

Exam Topic: Describe the differences between using full selectors versus using partial selectors

NEW QUESTION 53

CORRECT TEXT - (Topic 2)

In this exercise, you will create a UiPath automation that performs the steps below.

To achieve this, you will use the REFrameWork as the starting template and follow the UiPath development best practices.

Here are the steps performed by the Robot:

* 1. Log in to <https://www.acme-test.com>

* 2. On the landing page, Dashboard, click or hover over the Vendors menu item and then click on Search for Vendor. Click on Display All Vendors. Scrape the data from the whole table displayed. The resulting datatable will be used as the input data for the process. Navigate back to the dashboard.

Note: Navigation can be achieved in multiple ways by the robot - choose whichever you find best.

* 3. For each Tax ID:

- Navigate to Vendors - Search page (click or hover over the Vendors menu item and then click on Search for Vendor);

- Type the Tax ID into the Vendor Tax ID field;

- Click on Search;

- Extract the values for the Vendor, City and Country and compare them with the values from the previously extracted table from the Display All Vendors page (check for EXACT match for all fields!);

- If the values are not matching, this should be categorized as a Business Rule Exception;

- If the City does NOT belong to the group {"Rimini", "Berlin", "Roma", "Iasi", "Koln"}, this should be categorized as the second Business Rule Exception.

We can only process requests from these cities. Check the City value extracted after the individual Tax ID search;

- If no Business Rule Exception, Append the resulting datatable from each page into an CSV file; you shouldn't worry about the headers and format of the output file.

Constraints to follow in the development, using the REFrameWork:

* 1. TransactionItem datatype should be a DataRow. The process should recover and retry 2 times in case of errors in navigation between the Vendor Search and Vendor Search

Results pages. One transaction is the action of navigating to the Vendor Search page, searching for the TaxID and scraping the values from the resulting one row table. (Similar to ACME Process 5 from the UiPath Academy).

* 2. Create a separate workflow file for the Login to ACME. File input arguments: URL ; Username ; Password .

* 3. Create a separate workflow file for closing ACME.

* 4. Add the ACME_URL and ACME_Credential to the Excel Config file.

* 5. Populate InitAllApplications.xaml from the Framework folder with Invoking the Login to ACME and navigation to the Work Items.

* 6. Populate CloseAllApplications.xaml from the Framework folder with Invoking the Close ACME.

* 7. Populate KillAllProcesses.xaml from the Framework folder with killing the process used.

* 8. Populate the Process.xaml file with the following actions: Navigation, Searching for TaxID, Scraping, Checking if the values match, Checking for the correct City, Appending to CSV.

Important Note: Don't use external file references outside of the project folder (including Orchestrator Assets). Place all the used files within the project folder, zip that folder and upload it to the UiPath Certification Platform.

Zip ALL the used workflow files AND the output Excel file. Then upload the .zip file to the UiPath Certification Platform.

Options are : ALL THE BEST!

A. Mastered

B. Not Mastered

Answer: A

Explanation:

Send us your feedback on this.

NEW QUESTION 56

- (Topic 2)

Please choose the correct statement about selectors in UiPath.

A. Selectors in UiPath are case-sensitive by default

B. You cannot change the case sensitivity of attributes.

C. Selectors in UiPath are case-insensitive by default

D. You can change the case sensitivity of attributes.

E. Selectors in UiPath are case-insensitive by default

F. You cannot change the case sensitivity of attributes.

G. Selectors in UiPath are case-sensitive by default

H. You can change the case sensitivity of attributes.

Answer: D

Explanation:

When a selector is built, the Case-Sensitive property makes it possible to identify elements by also taking into consideration the casing of an attribute's value.

In order to enable identification of attributes by casing, the case-sensitive() attribute needs to be included in the selector, in the tag of the target attribute:

```
casesensitive:<attribute-name>='false'
```

Enables you to validate a selector by also including an attribute's value casing. By default, the value of this option is set to true. If set to false, the casing of the attribute's value is not taken into account.

Example:

The following selector will be recognized by UI Explorer:

```
<html app='chrome.exe' title='Case-Sensitive Selectors'/>
```

If capital letters are changed to lowercase, UI Explorer will not recognize this selector:

```
<html app='chrome.exe' title='case-sensitive selectors'/>
```

However, you can set to ignore case sensitivity of the title attribute in the following way:

<html app='chrome.exe' title='case-sensitive selectors' casesensitive:title='false' /> UiPath Documentation

Exam Topic: Describe how Tags and Attributes, Dynamic Selectors, Anchor Base, etc. are used in UI Explorer to create a robust selector in the Default, Active Accessibility, or UI Automation frameworks

NEW QUESTION 58

- (Topic 2)

In the UiPath Robotic Enterprise Framework template, in the Get Transaction Data state of the Main workflow, what happens before the next transaction item is retrieved?

Options are :

- A. We check if the previous transaction has been completed
- B. We check if a kill signal was sent from Orchestrator
- C. We check if a stop signal was sent from Orchestrator

Answer: C

NEW QUESTION 62

- (Topic 2)

Which activity can be used if you want to test whether a condition evaluates to true or false?

Options are :

- A. Flow Decision activity
- B. If activity
- C. For Each activity

Answer: AB

NEW QUESTION 66

- (Topic 2)

How can you retrieve the value stored in a Queue Item variable? Options are :

- A. Use the Deserialize Xml activity
- B. Use the Deserialize Json activity
- C. Use the SpecificContent property

Answer: C

NEW QUESTION 70

- (Topic 2)

What can be used to debug a workflow? Options are :

- A. Breakpoints
- B. The Slow Step option.
- C. Highlighting activities.

Answer: AB

NEW QUESTION 71

- (Topic 2)

A developer wants to pass a value of a variable to a workflow and modify it inside. However, after the workflow is finished, developer wants to use the original value of the variable.

What should be the direction of the argument?

- A. In
- B. Reserved
- C. Out
- D. In/Out

Answer: A

Explanation:

The following directions are available:

In – the argument can only be used within the given project. If the variable is modified inside the workflow, its value is not changed in the main workflow.

Out – the argument can be used to pass data outside of a given project. In/Out – the arguments can be used both within and outside of a given project. UiPath Documentation

Exam Topic: Explain how to use the Invoke Code, Invoke Method, and Invoke Workflow activities and how arguments are used to pass data

NEW QUESTION 73

- (Topic 2)

What is the robot able to do when the Full Text scraping method is used? Options are :

- A. Get the entire visible text
- B. Get font Information (Size color)
- C. Get editable text
- D. Get hidden information

Answer: ACD

NEW QUESTION 74

- (Topic 2)

Which emails are deleted if you use Get IMAP Mail Messages with the DeleteMessages property set to true?

Options are :

- A. Only the emails that were marked as previously read.
- B. There is no DeleteMessages property for the Get IMAP Mail Message activit
- C. This option is available only for Get Exchange Mail Message.
- D. The ones in the list that is retrieved by the Get IMAP Mail Messages activity.

Answer: C

NEW QUESTION 78

- (Topic 2)

What is the difference between a Click activity whose SimulateClick property is checked and another one with the same property unchecked?

Options are :

- A. The activity with an enabled SimulateClick flag does not click the target element, it just simulates the action
- B. The activity with the SimulateClick flag unchecked moves the mouse cursor over the target element, while the one with flag set does not move the mouse cursor
- C. The activity with an enabled SimulateClick flag does not click the target element, it just simulates the action

Answer: C

NEW QUESTION 81

- (Topic 2)

How can you fine tune a selector?

Options are :

- A. Replacing variable attribute parts with *
- B. Adding all parents
- C. Making sure you have an idx attribute

Answer: AB

NEW QUESTION 83

- (Topic 2)

In the UiPath Robotic Enterprise Framework template, what happens if the processing of a transaction item falls with an Application Exception of a System Error?

Options are :

- A. All use application are closed and then re-initialized
- B. The execution of the transaction item is retried if the MaxRetryNumber config value is greater than 0
- C. The process executes the End Process state

Answer: AB

NEW QUESTION 86

- (Topic 2)

Which of the following statements related to Orchestrator are true? Options are :

- A. A robot can execute many different jobs at the same time.
- B. Robots can be assigned to multiple environments.
- C. A robot can execute many different jobs one after the other.

Answer: BC

NEW QUESTION 90

- (Topic 2)

When is it recommended to use Desktop recording?

Options are :

- A. When you automate Citrix Applications
- B. When you automate more steps in the same window
- C. When you automate one step
- D. When you automate Web pages

Answer: B

NEW QUESTION 94

- (Topic 2)

What can the UiPath Robotic Enterprise Framework template be used as? Options are :

- A. A consumer of a queue in Orchestrator

- B. A complete library for front office robots
- C. The starting point for every automation project

Answer: C

NEW QUESTION 97

- (Topic 2)

What type of assets can be stored in Orchestrator? Options are :

- A. Array, Datatable, Bool, String
- B. Bool, String, Integer, Credential
- C. Integer, Passowrd, GenericValue, String

Answer: B

NEW QUESTION 100

- (Topic 2)

While automating an installation wizard, a pop-up window may or may not appear. What can you use to close the window without stopping the workflow?

- A. Use a Click activity inside a Try Catch activity.
- B. Use a Click activity with the ContinueOnError property set to True.
- C. Use a Click activity and set its TimeoutMS property to 30.

Answer: AB

NEW QUESTION 104

- (Topic 2)

A developer wants to use an Anchor Base activity to search for a UI element by using another UI element as an anchor.

What activity can be used to provide an anchor?

- A. Find Image
- B. Find Relative Element
- C. Element Exists
- D. Find Children

Answer: A

Explanation:

Find Image would return a UI element that can be used as an anchor. UiPath Documentation

Exam Topic: Describe how Tags and Attributes, Dynamic Selectors, Anchor Base, etc. are used in UI Explorer to create a robust selector in the Default, Active Accessibility, or UI Automation frameworks


NEW QUESTION 108

- (Topic 2)


What activities will be executed if the following Try Catch activity if the Notepad application is not running?

Catch block contains catches in the following order:

- * 1. System.InvalidOperationException
- * 2. System.SelectorNotFoundException

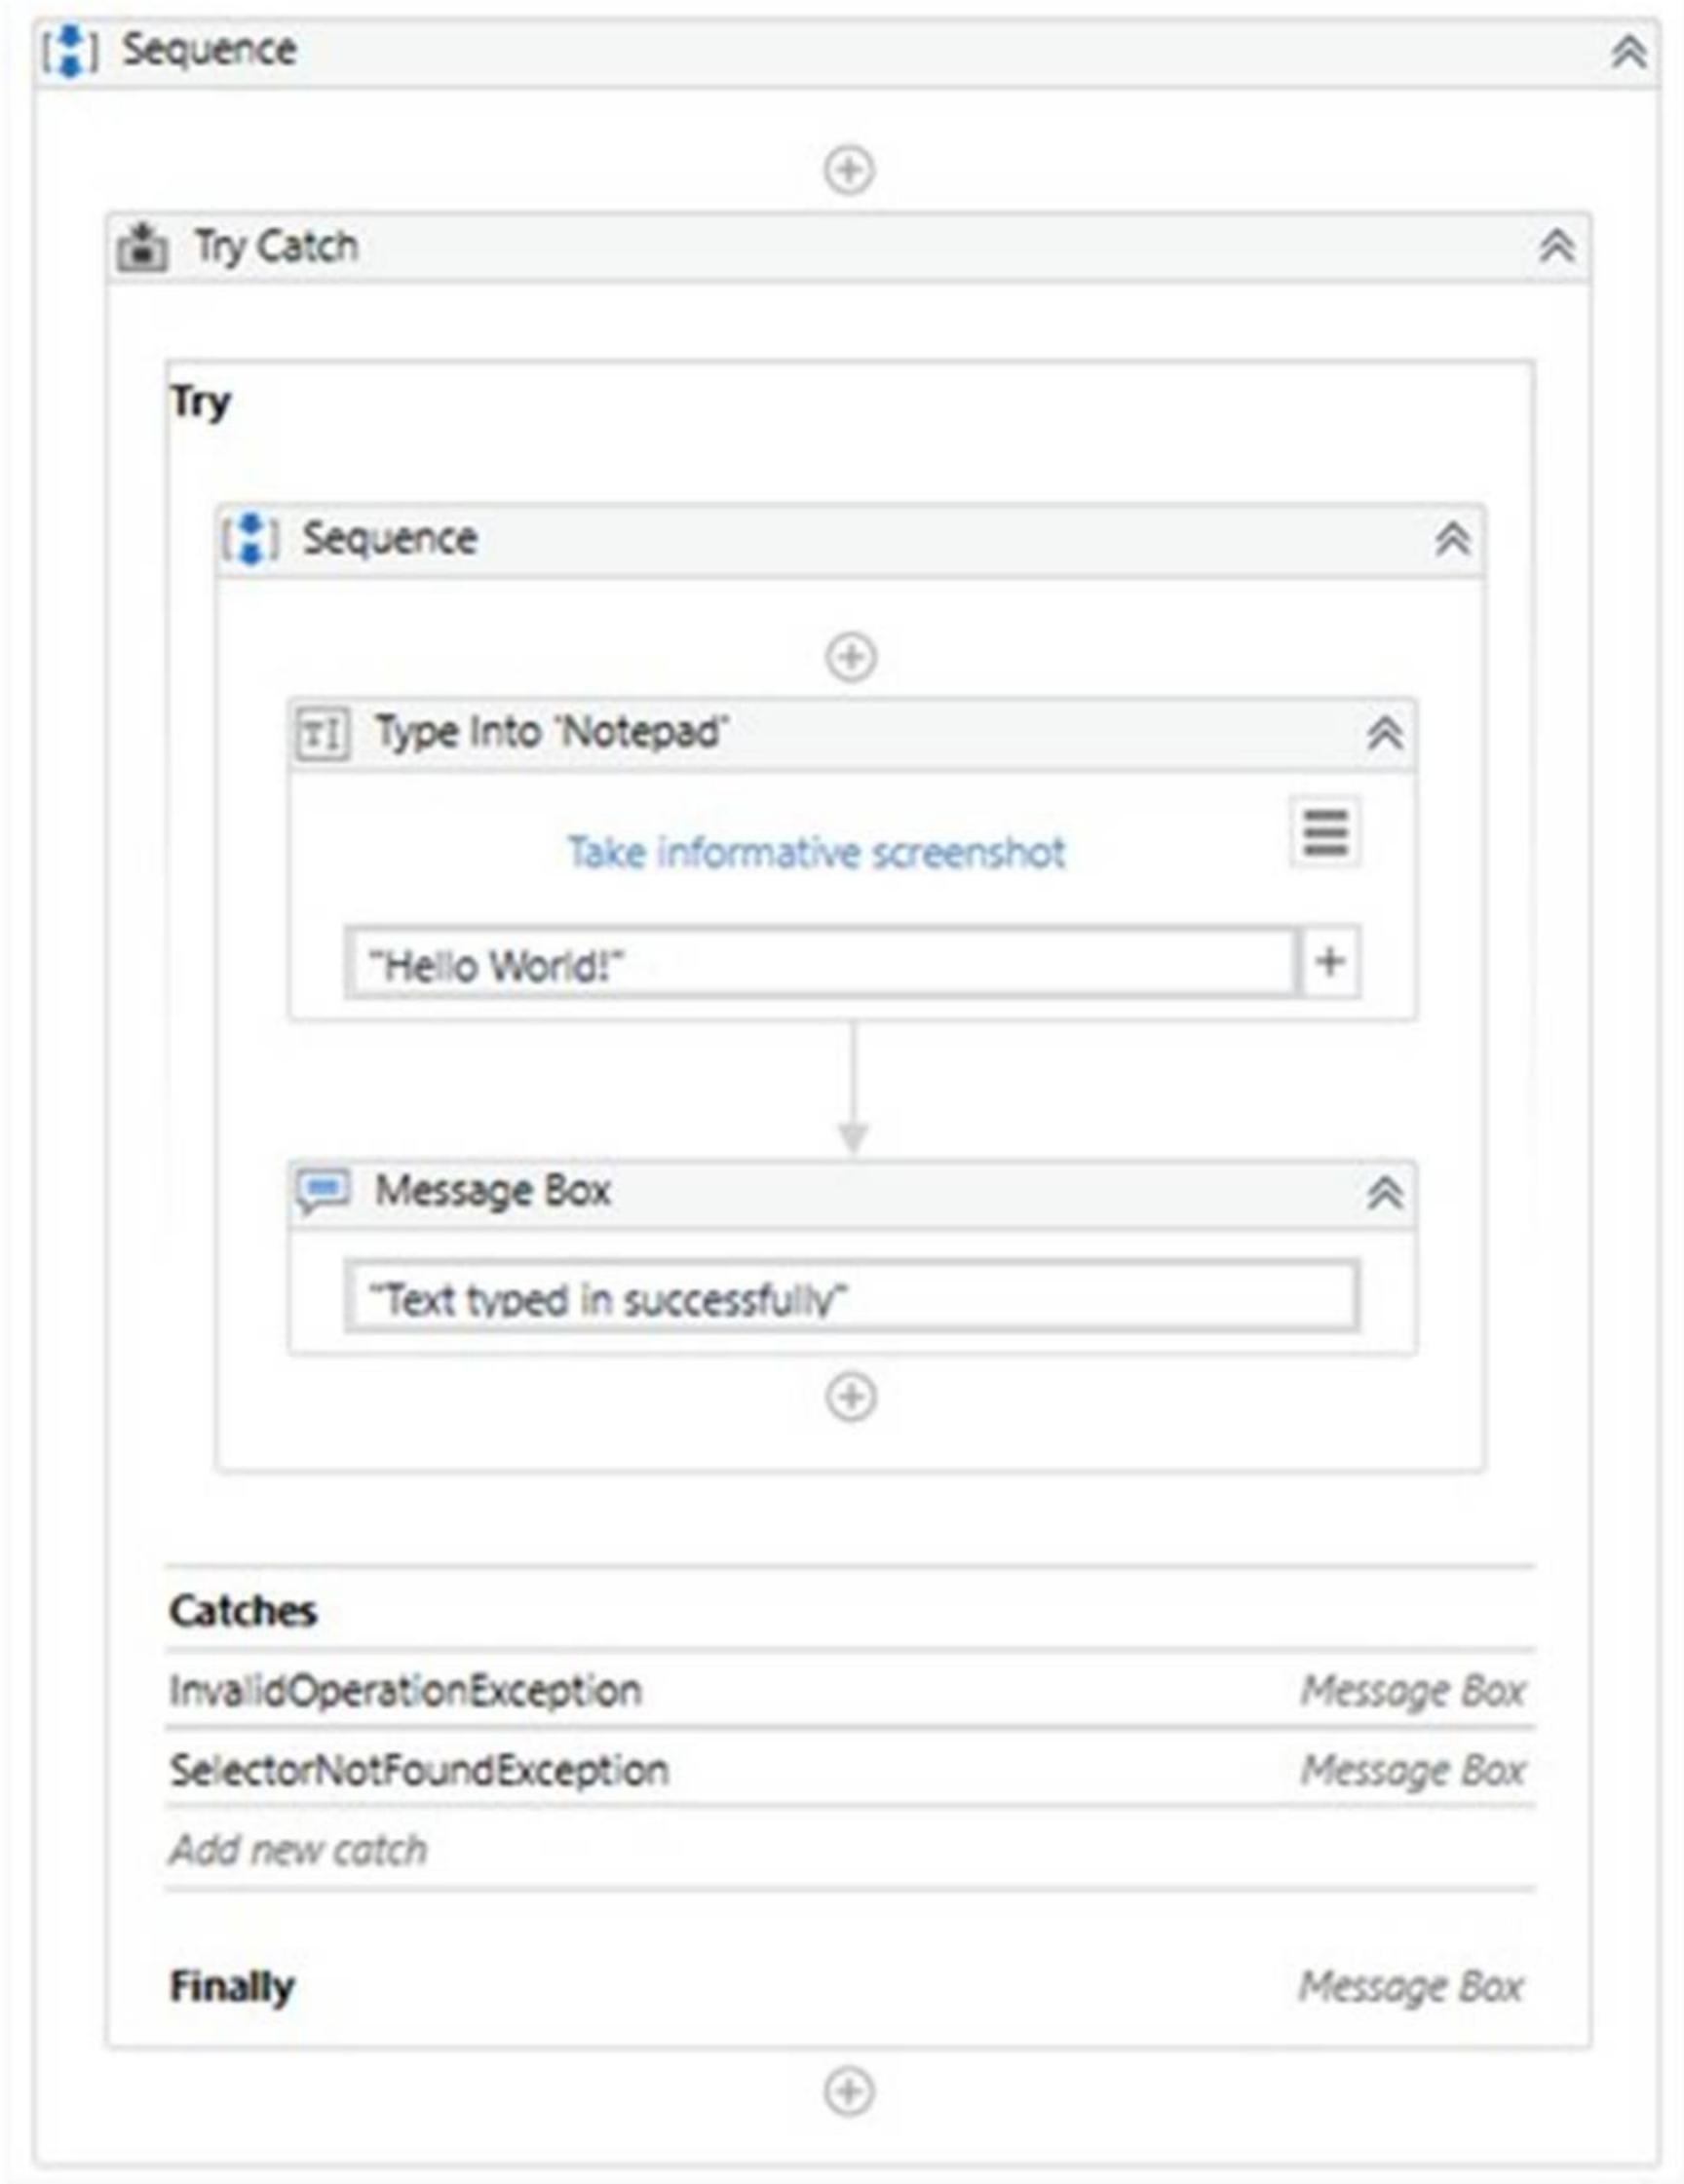

Please find properties of Type Into activity below:

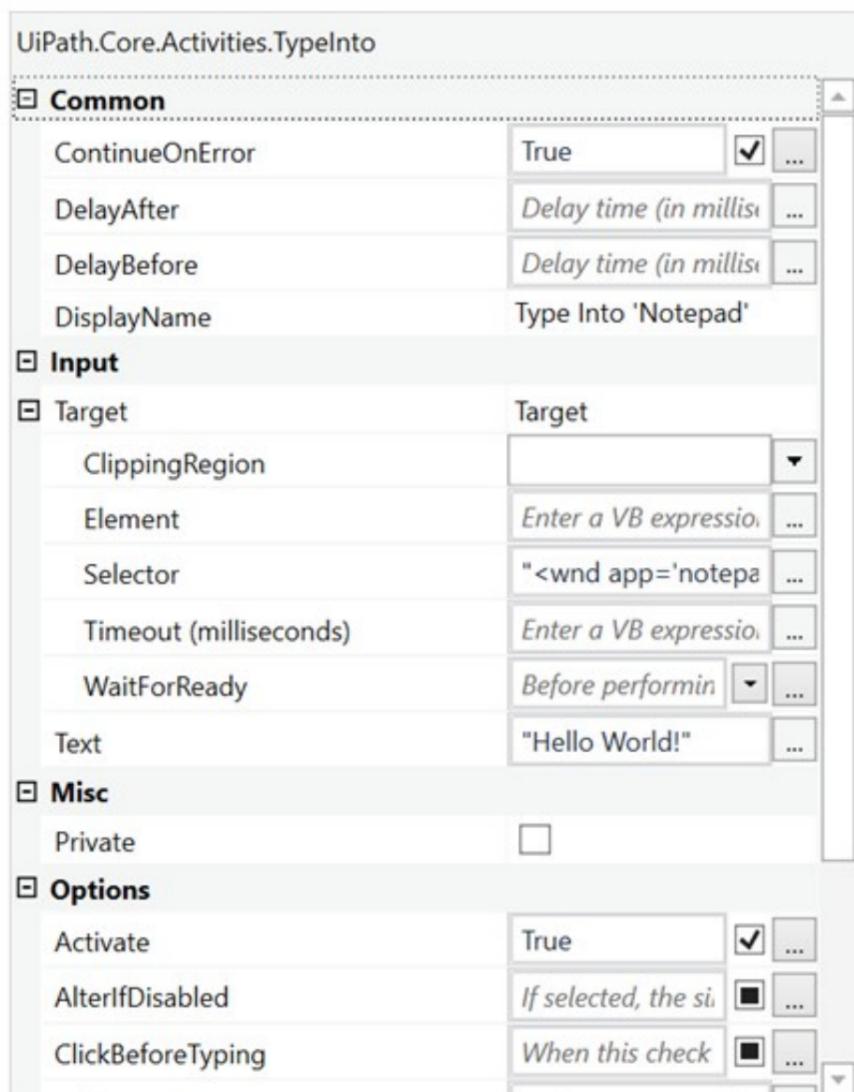

- A. 1. System.SelectorNotFoundException* 2. Finally block
- B. 1. System.InvalidOperationException catch* 2. Finally block
- C. 1. Message Box "Text typed in successfully"
- D. 1. Message Box "Text typed in successfully"* 2. Finally block

Answer: D

Explanation:

If Type Into activity is included in Try Catch and the value of the ContinueOnError property is True, no error occurs when the project is executed. Activities in Finally to be performed after the Try and Catches blocks are executed. This section is executed only when no exceptions are thrown or when an error occurs and is caught in the Catches section. So in this case, Finally block is executed, as the exception was not thrown.

UiPath Documentation

Exam Topic: Identify and describe the use of the error handling activities such as Try Catch, Throw, Rethrow, Retry Scope, and Global Exception Handler.

NEW QUESTION 112

- (Topic 2)

Why is renaming activities considered to be one of the best practices? Options are :

- A. In case of an exception, to be able to find its source activity
- B. To be able to understand the process logic without expanding each sequence or invoked workflow.
- C. To easily understand the high-level business logic from a workflow.

Answer: ABC

NEW QUESTION 117

- (Topic 2)

What is the difference between a Click activity whose SimulateClick property is checked and another one with the same property unchecked? Options are :

- A. The activity with an enabled SimulateClick flag does not click the target element, it just simulates the action.
- B. The activity with the SimulateClick flag unchecked moves the mouse cursor over the target element, while the one with the flag set does not move the mouse cursor.
- C. There is no difference - both can be used in same scenarios.

Answer: B

NEW QUESTION 121

- (Topic 2)

Please choose the correct statement about automation processes.

- A. Automation processes that use UiAutomation activities can run under a locked screen.
- B. It is okay to use UiAutomation activities in background processes.

- C. By default, all processes are marked as background, unless specified otherwise.
- D. Only one foreground process can be executed at a time.

Answer: D


Explanation:

A foreground process is used when your automation project needs to interact with UI elements. These processes heavily rely on UIAutomation activities. Please note that you can only execute one foreground process at a time.

NEW QUESTION 126

- (Topic 2)

↔ Transition(s)

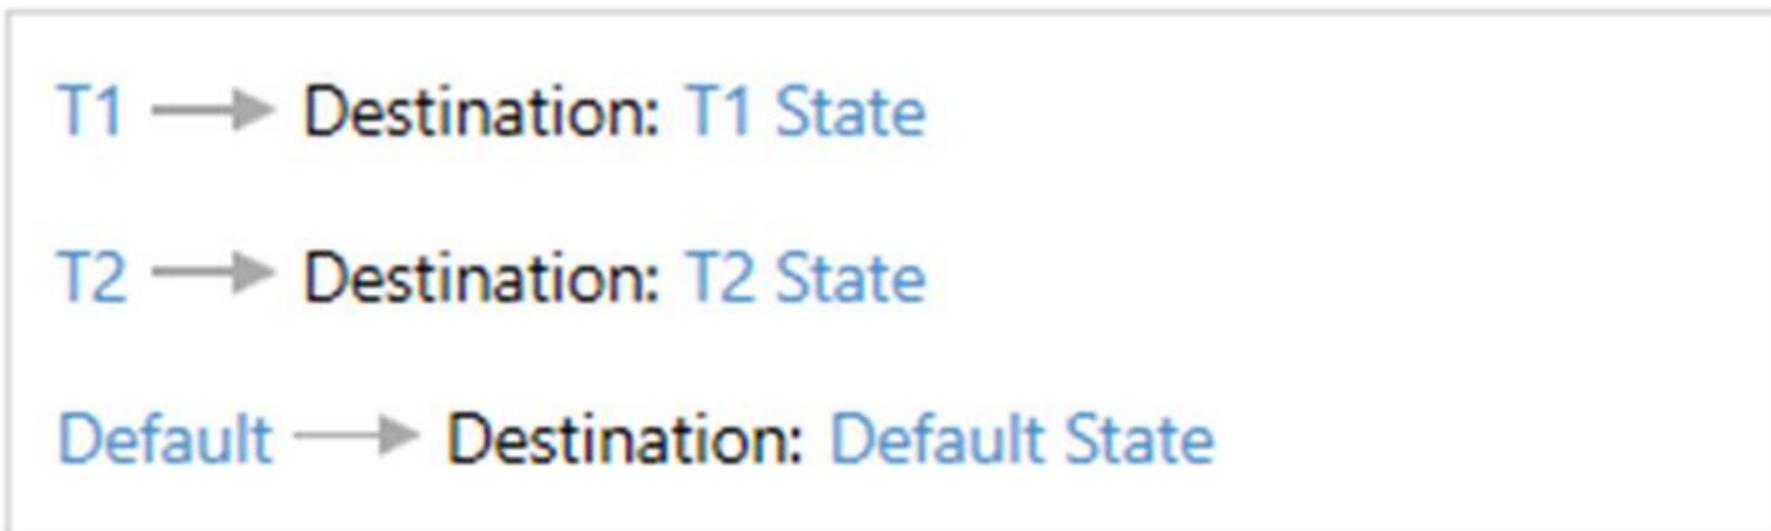

A developer implements a state machine for his automation solution. What happens if a condition both for T1 and T2 is True?

- A. Default transition is executed.
- B. T1 transition is executed.
- C. Both T1 and T2 are executed.
- D. An error is thrown.

Answer: B

Explanation:

If conditions of multiple transitions are met, the first in order is executed. In this case, the T1 transition is executed.
 UiPath Forum

NEW QUESTION 129

- (Topic 2)

How can you dynamically change parts of a selector? Options are :

- A. By using variables to replace the dynamic parts
- B. You cannot have dynamic components in a selector.
- C. By adding parameters from the Properties tab.

Answer: A

NEW QUESTION 131

- (Topic 2)

How does the Anchor Base activity work? Options are :


- A. It searches for an UiElement at a fixed anchor position.
- B. It searches for an UiElement using a relative coordinate position.
- C. It searches for an UiElement by using another UiElement as anchor.

Answer: C

NEW QUESTION 132

- (Topic 2)

A developer has created a process that gathers a listing of stock market prices in the following format <Symbol>_<Price>USD (<Company Name>). How should the third line in RegEx Builder be modified to ensure that only items with prices of at least 100 are identified?

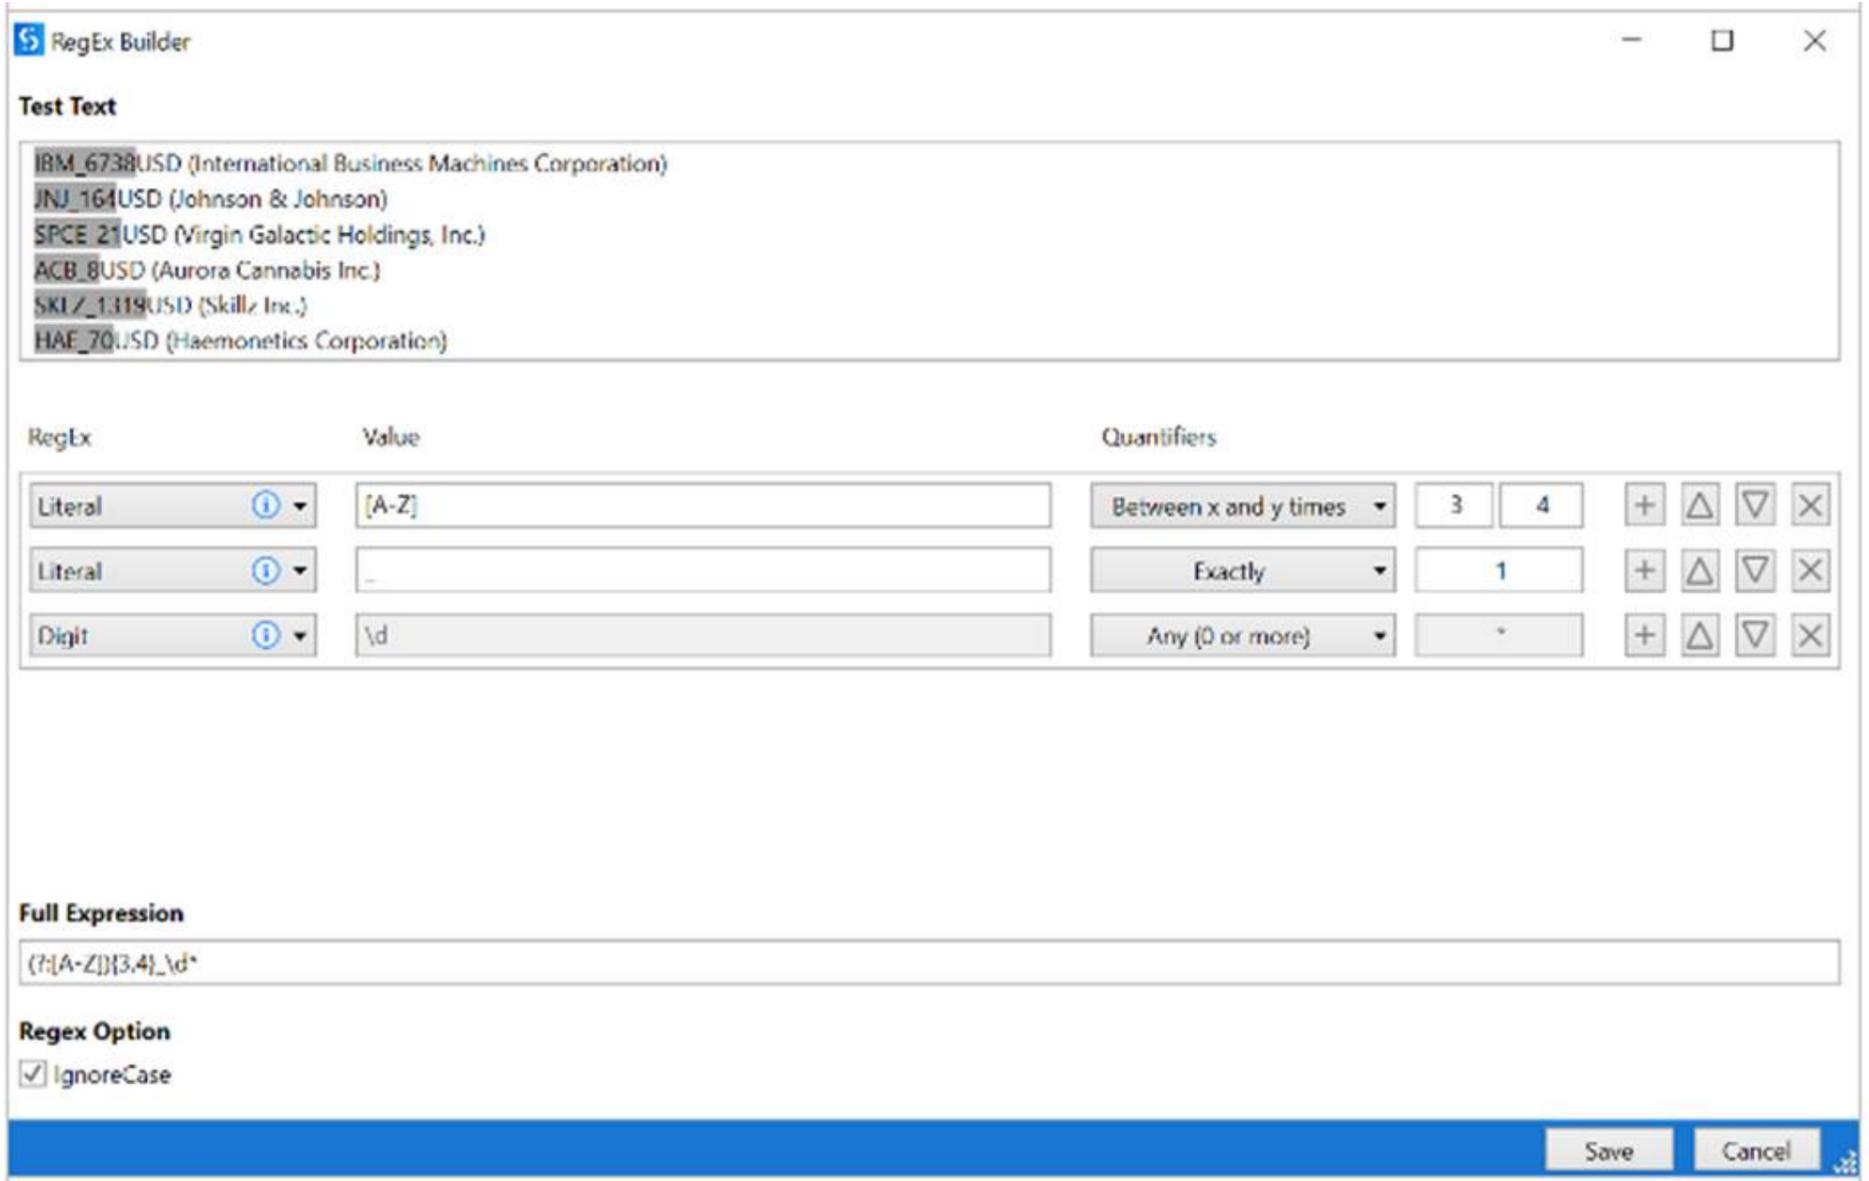


- A. RegEx: One of Value: 123456789Quantifiers: Between 2 and 4
- B. RegEx: Any word character Value: \wQuantifiers: Exactly 3
- C. RegEx: Digit Value: \dQuantifiers: Exactly 3 (Correct)
- D. RegEx: Literal Value: [0-9]Quantifiers: At least one (1 or more)

Answer: C

Explanation:

Exactly 3 digits would ensure that the price is at least 100 USD, as any price below would have only up to 2 digits.

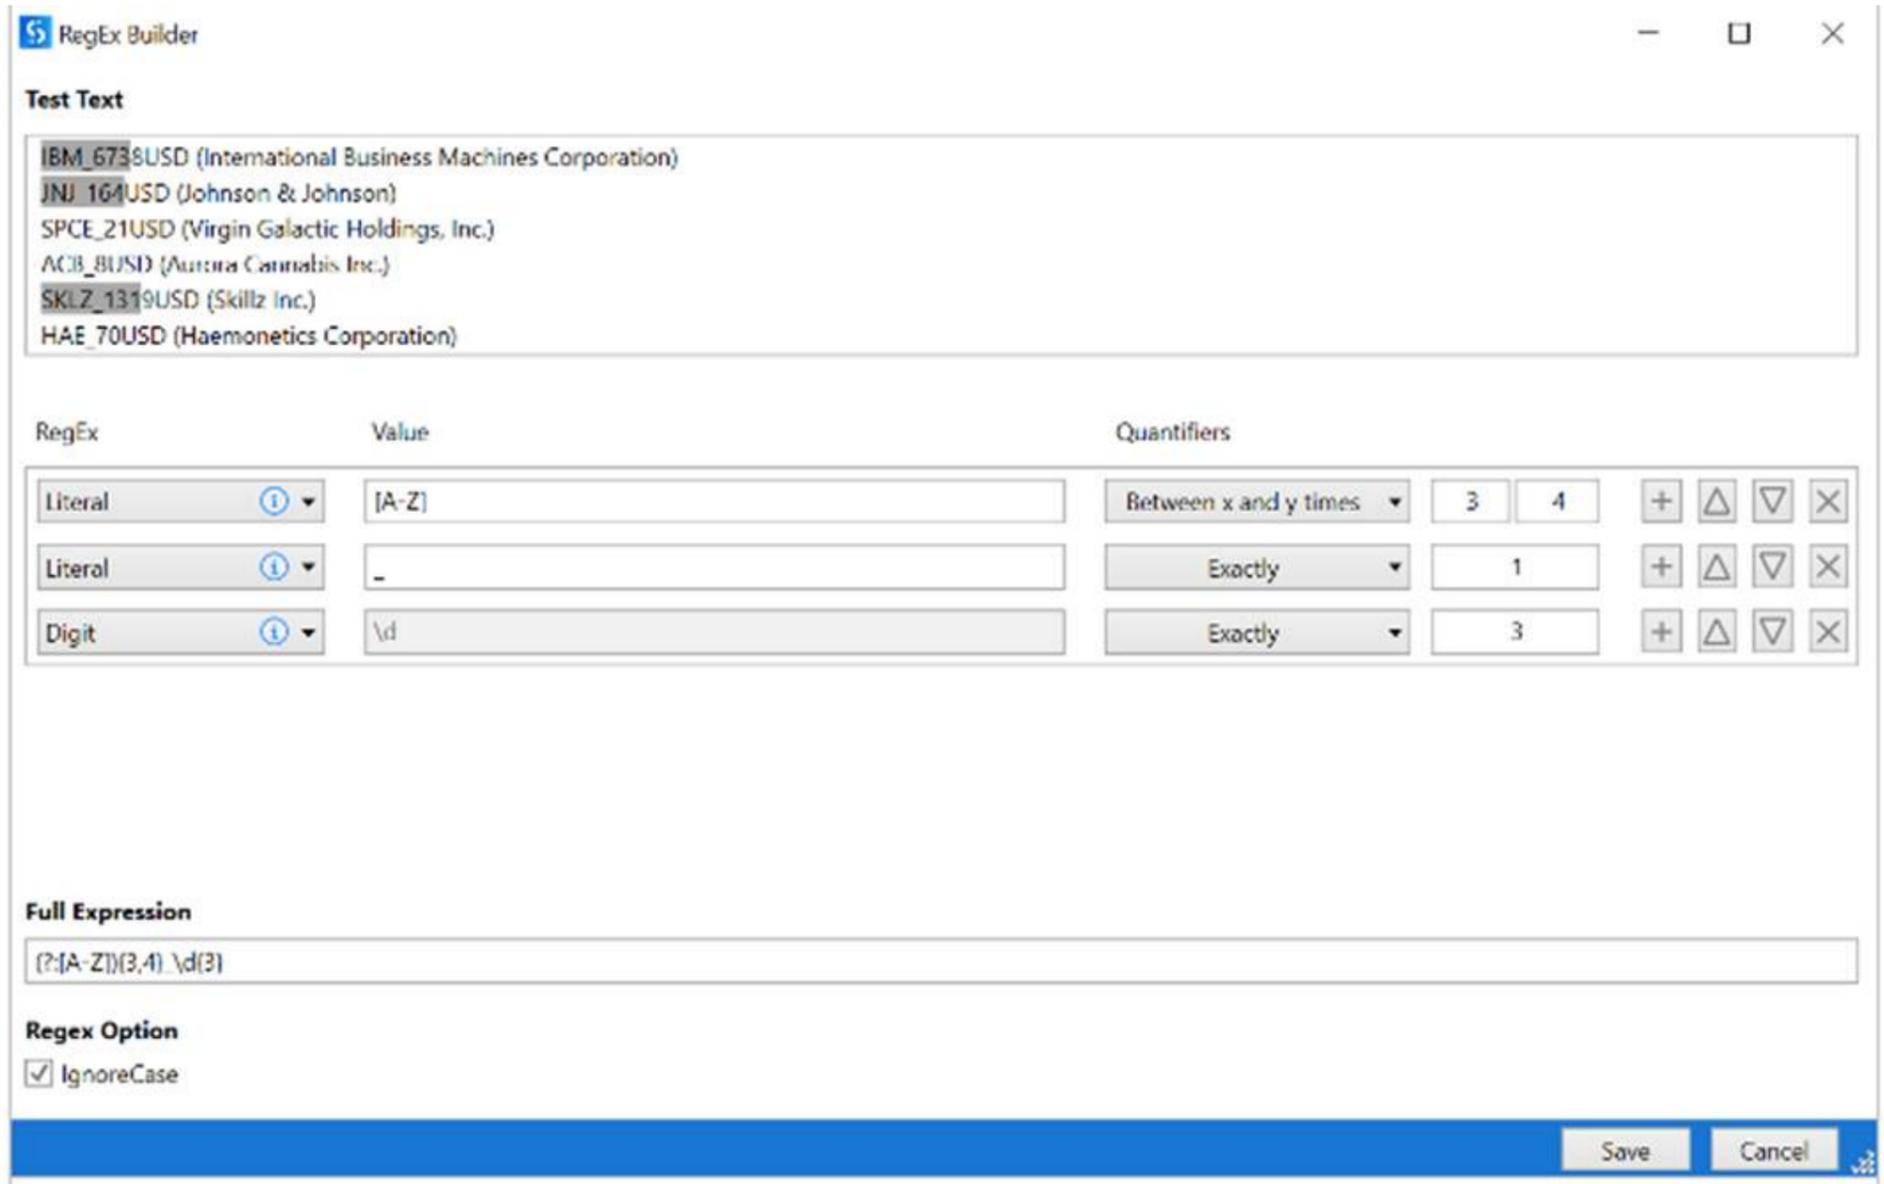

Exam Topic: Identify how methods, activities, and the RegEx Builder are used for string manipulation and regular expressions.

NEW QUESTION 135

- (Topic 2)

In the UiPath Robotic Enterprise Framework template, in the Main workflow, what is the default type of the TransactionItem variable?

Options are :

- A. String
- B. QueueItem
- C. Object

Answer: B

NEW QUESTION 140

- (Topic 2)

A developer uses a State Machine for his process automation project. The developer wants to define conditions under which the automation project can pass from one State to another. What is the possible way to do so?

- A. Drag Transition activity from the Activities Panel to define the condition.
- B. Drag If activity from the Activities Panel to define the condition.
- C. Drag Flowchart Decision activity from the Activities Panel to define the condition.
- D. Connect states to generate a transition and define the condition in it.

Answer: D

Explanation:

The Transition activity cannot be dragged from the Activities Panel, like a conventional activity. It is generated when you link a State to another State or to a Final State, within a State Machine container. This activity helps you input conditions under which the automation project can pass from one State to another.

UiPath Documentation

Exam Topic: Describe how to use state machines versus flowcharts and sequences

Bottom of Form Top of Form

NEW QUESTION 144

- (Topic 2)

The String.Format("Input = {0} and Output = {1}", "1","2") expression returns the following text:

Options are :

- A. Input = 0 and Output = 0
- B. Input = 1 and Output = 2
- C. Input = 1 and Output = 1
- D. Input = {0} and Output = {1}

Answer: B

NEW QUESTION 145

- (Topic 2)

A developer uses a GIT repository for version control of his project. Which of the following buttons ensures that the changes are applied to the local Git repository?


- A. Save changes
- B. Commit
- C. Commit and Push
- D. Commit and Save

Answer: B

Explanation:

Commit button allows to commit the changes to the local Git repository.

Commit and Push button allows to commit the changes and push them to the remote repository.

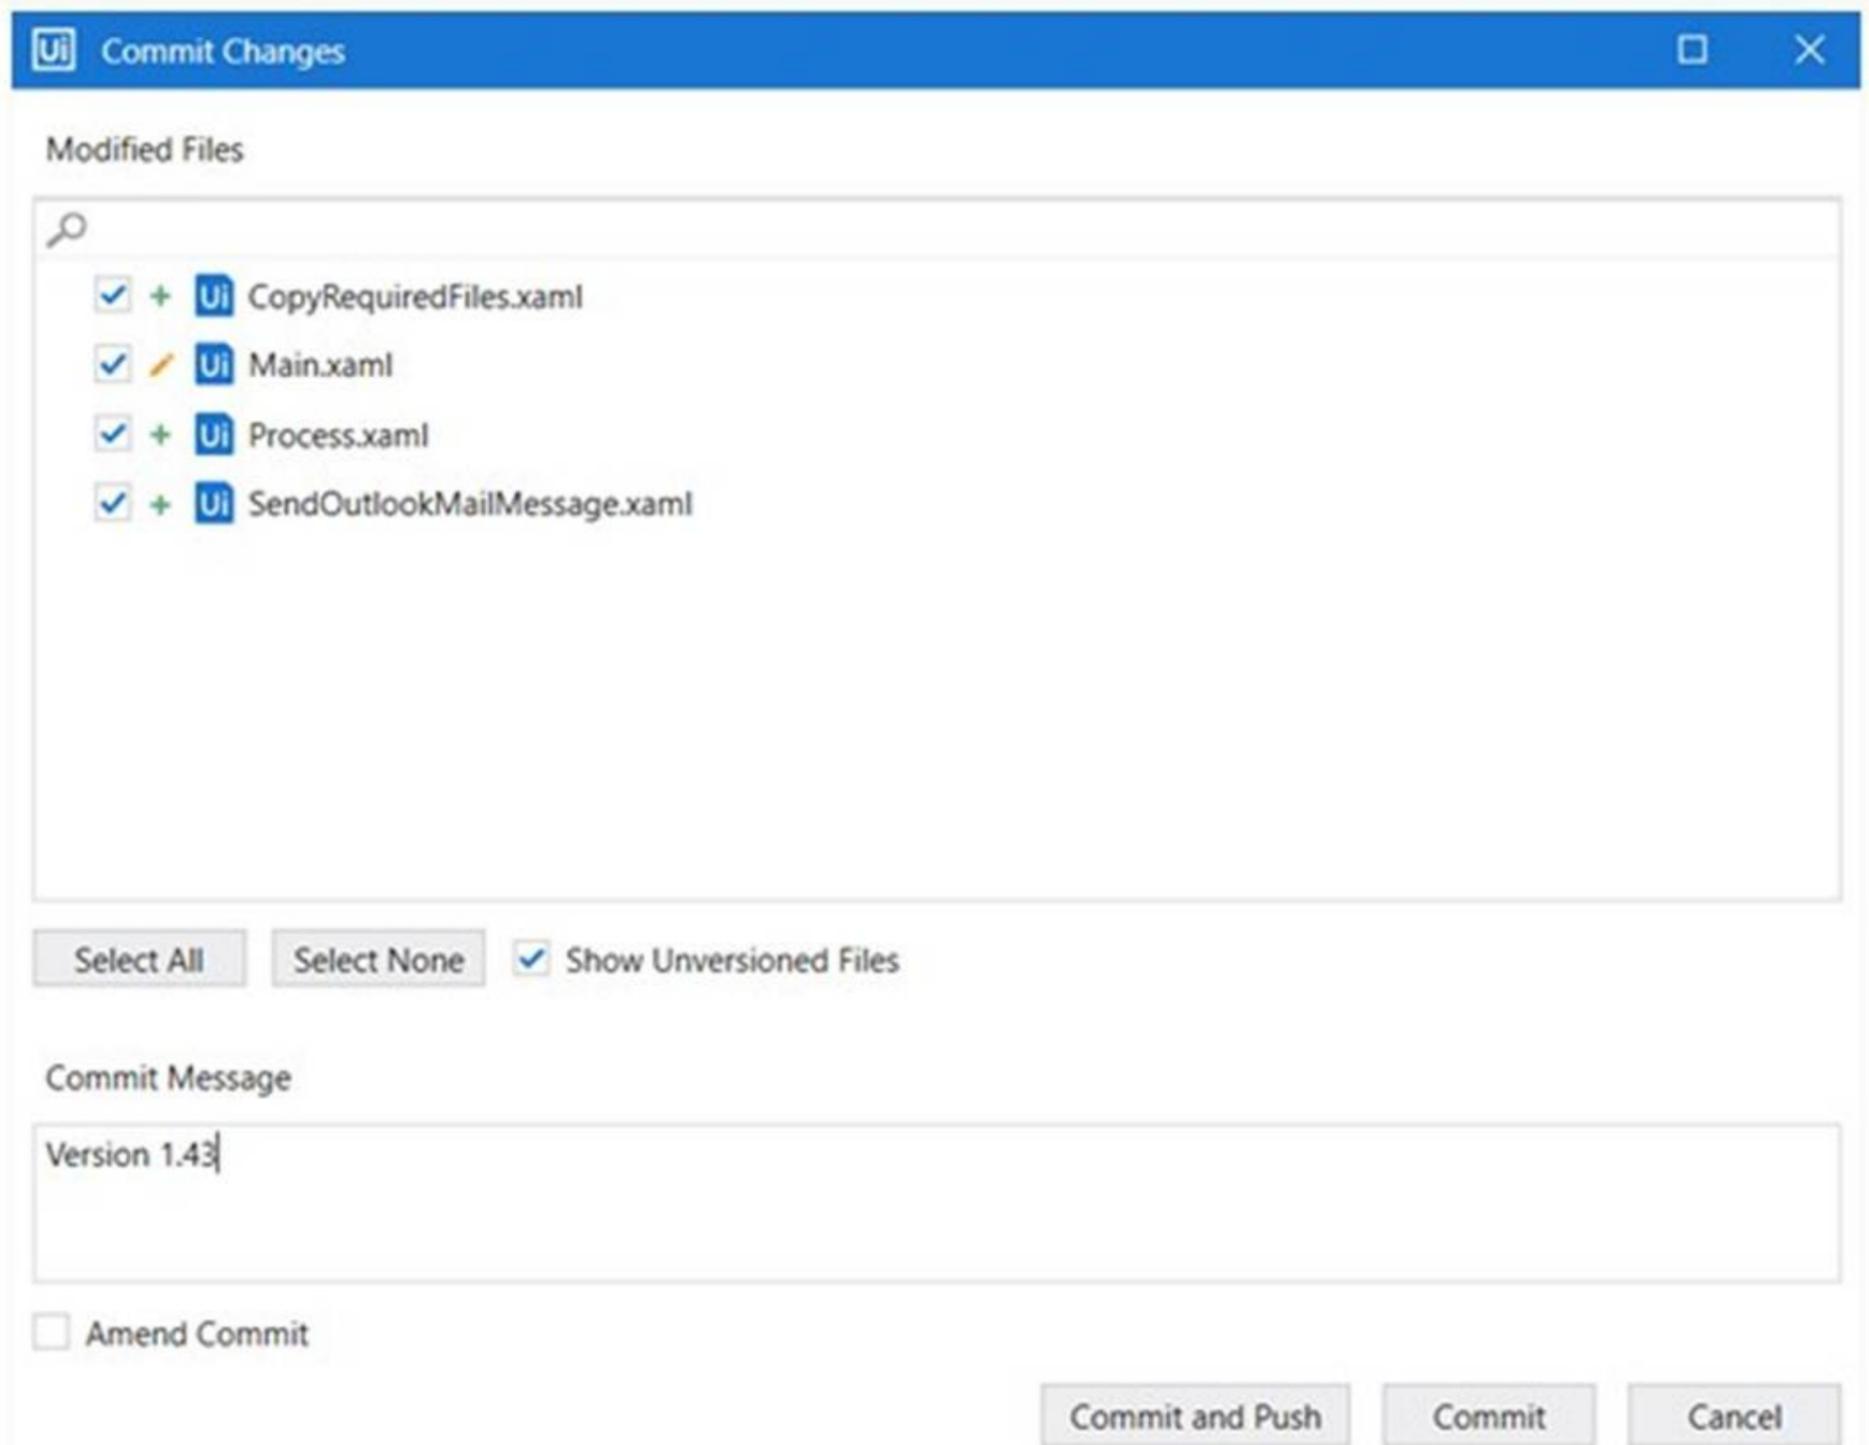

UiPath Documentation

Exam Topic: Understand how GIT and TFS are used for version control

NEW QUESTION 148

- (Topic 2)

A developer creates a process using a State Machine. What section(s) does the Final State activity contain?

- A. Entry and Exit
- B. Entry
- C. Exit
- D. Entry, Exit and Transition(s)

Answer: B

Explanation:

The State activity contains three sections, Entry, Exit and Transition(s), while the Final State only contains one section, Entry.

UiPath Documentation

Exam Topic: Describe how to use state machines versus flowcharts and sequences

NEW QUESTION 151

- (Topic 2)

If a large item collection is processed using For Each, which activity enables you to efficiently exit the loop after a specific moment?

Options are :

- A. No activity can be use
- B. Instead, you have to create a Boolean variable based on which the For Each loop is broken
- C. The "Break" activity is the most suitable in For Each
- D. A While loop should be used instead of For Each

Answer: B

NEW QUESTION 154

- (Topic 3)

A developer created an automation project in the Robotic Enterprise (RE) Framework which needs to enter a User ID depending on the machine it runs on. The User ID is stored in Orchestrator as a Text asset using the Value Per Account-Machine method.

Which steps should the developer perform to use this asset in the project?

- A. Add a row in the Settings sheet in Config.xlsx with the name of the Orchestrator asse
- B. Use the Get Asset activity in the workflow to get the User ID.
- C. Add a row in the Settings sheet in Config.xlsx with the name of the Orchestrator asse
- D. In the workflow, retrieve the User ID by referencing the Config dictionary.
- E. Add a row in the Assets sheet in Config.xlsx with the name of the Orchestrator asse
- F. Use the Get Asset activity in the workflow to get the User ID.
- G. Add a row in the Assets sheet in Config.xlsx with the name of the Orchestrator asse
- H. In the workflow, retrieve the User ID by referencing the Config dictionary.

Answer: C

NEW QUESTION 159

- (Topic 3)

Based on UiPath best practices, which project layout is recommended for processes with complex transitions in UiPath Studio?

- A. State Machine
- B. Global Exception Handler
- C. Flowchart
- D. Sequence

Answer: C

NEW QUESTION 161

- (Topic 3)

A developer created a sequence with a Retry Scope shown in the following exhibit:

Name	Variable type	Scope	Default
MyInt	Int32	Main	0

What is the content of the Output panel after running this sequence?

- A. 0
- B. 1
- C. 123
- D. 123Retry Scope: End

Answer: B

NEW QUESTION 164

- (Topic 3)

A developer defined two Int32 variables, FirstInt and SecondInt, in a workflow. Which panel can the developer use to monitor the result of the expression. FirstInt > SecondInt, throughout the execution of the workflow in Debug mode?

- A. Breakpoints Panel
- B. Locals Panel
- C. Watch Panel
- D. Immediate Panel

Answer: C

NEW QUESTION 165

- (Topic 3)

A developer created a project in the Robotic Enterprise (RE) Framework. The Config.xlsx has the Asset entry shown in the exhibit:

	A	B
1	Name	Asset
2	SME_EmailAddress	HR_EmployeeOnboarding_Text_SME_EmailAddress

Settings | Constants | **Assets** (+)

Assuming the default REFramework configuration, how can the developer reference the Asset in the Config variable so that the dictionary returns the asset value as a String?

- A. Config("SME_EmailAddress").ToString
- B. Config("SME_EmailAddress","HR_EmployeeOnboarding_Text_SME_EmailAddress").ToString
- C. Config("HR_EmployeeOnboarding_Text_SME_EmailAddress").ToString
- D. Config("HR_EmployeeOnboarding_Text_SME_EmailAddress","SME_EmailAddress").ToString

Answer: C

NEW QUESTION 166

- (Topic 3)

A developer wants to use separate user data folders for browsers in the Main and PiP sessions. What is the correct setting of the UserDataFolderMode property on the Open Browser activity?

- A. BrowserUserDataFolderMode.CustomFolder
- B. BrowserUserDataFolderModeAutomatic
- C. %LocalAppData%\UiPath\PIP Browser Profiles
- D. BrowserUserDataFolderMode.DefaultFolder

Answer: B

NEW QUESTION 168

- (Topic 3)

A developer has built a process consisting of three invoked workflows in the Main.xaml file. The second workflow should be run in Picture-in-Picture (PiP). How should the Invoke Workflow File activity properties be configured?

- A. Target Session = Picture in Picture Isolated = Checked
- B. Target Session = Current Isolated = Unchecked
- C. Target Session = Picture in Picture Isolated = Unchecked
- D. Target Session = Current Isolated = Checked

Answer: A

NEW QUESTION 172

- (Topic 3)

A developer is creating a process using the Dispatcher and Performer model. The Dispatcher uses the Bulk Add Queue Items activity to upload items to an Orchestrator queue. Which type of design is best-suited for the automation of this Dispatcher?

- A. Library
- B. Iterative Process
- C. Transactional Process
- D. Linear Process

Answer: C


Explanation:

Reference: <https://forum.uipath.com/t/how-would-you-design-this-using-the-re-framework-using-queues-with-dispatcher-performer/359740>


NEW QUESTION 174

- (Topic 3)

A developer has created the following sequence:

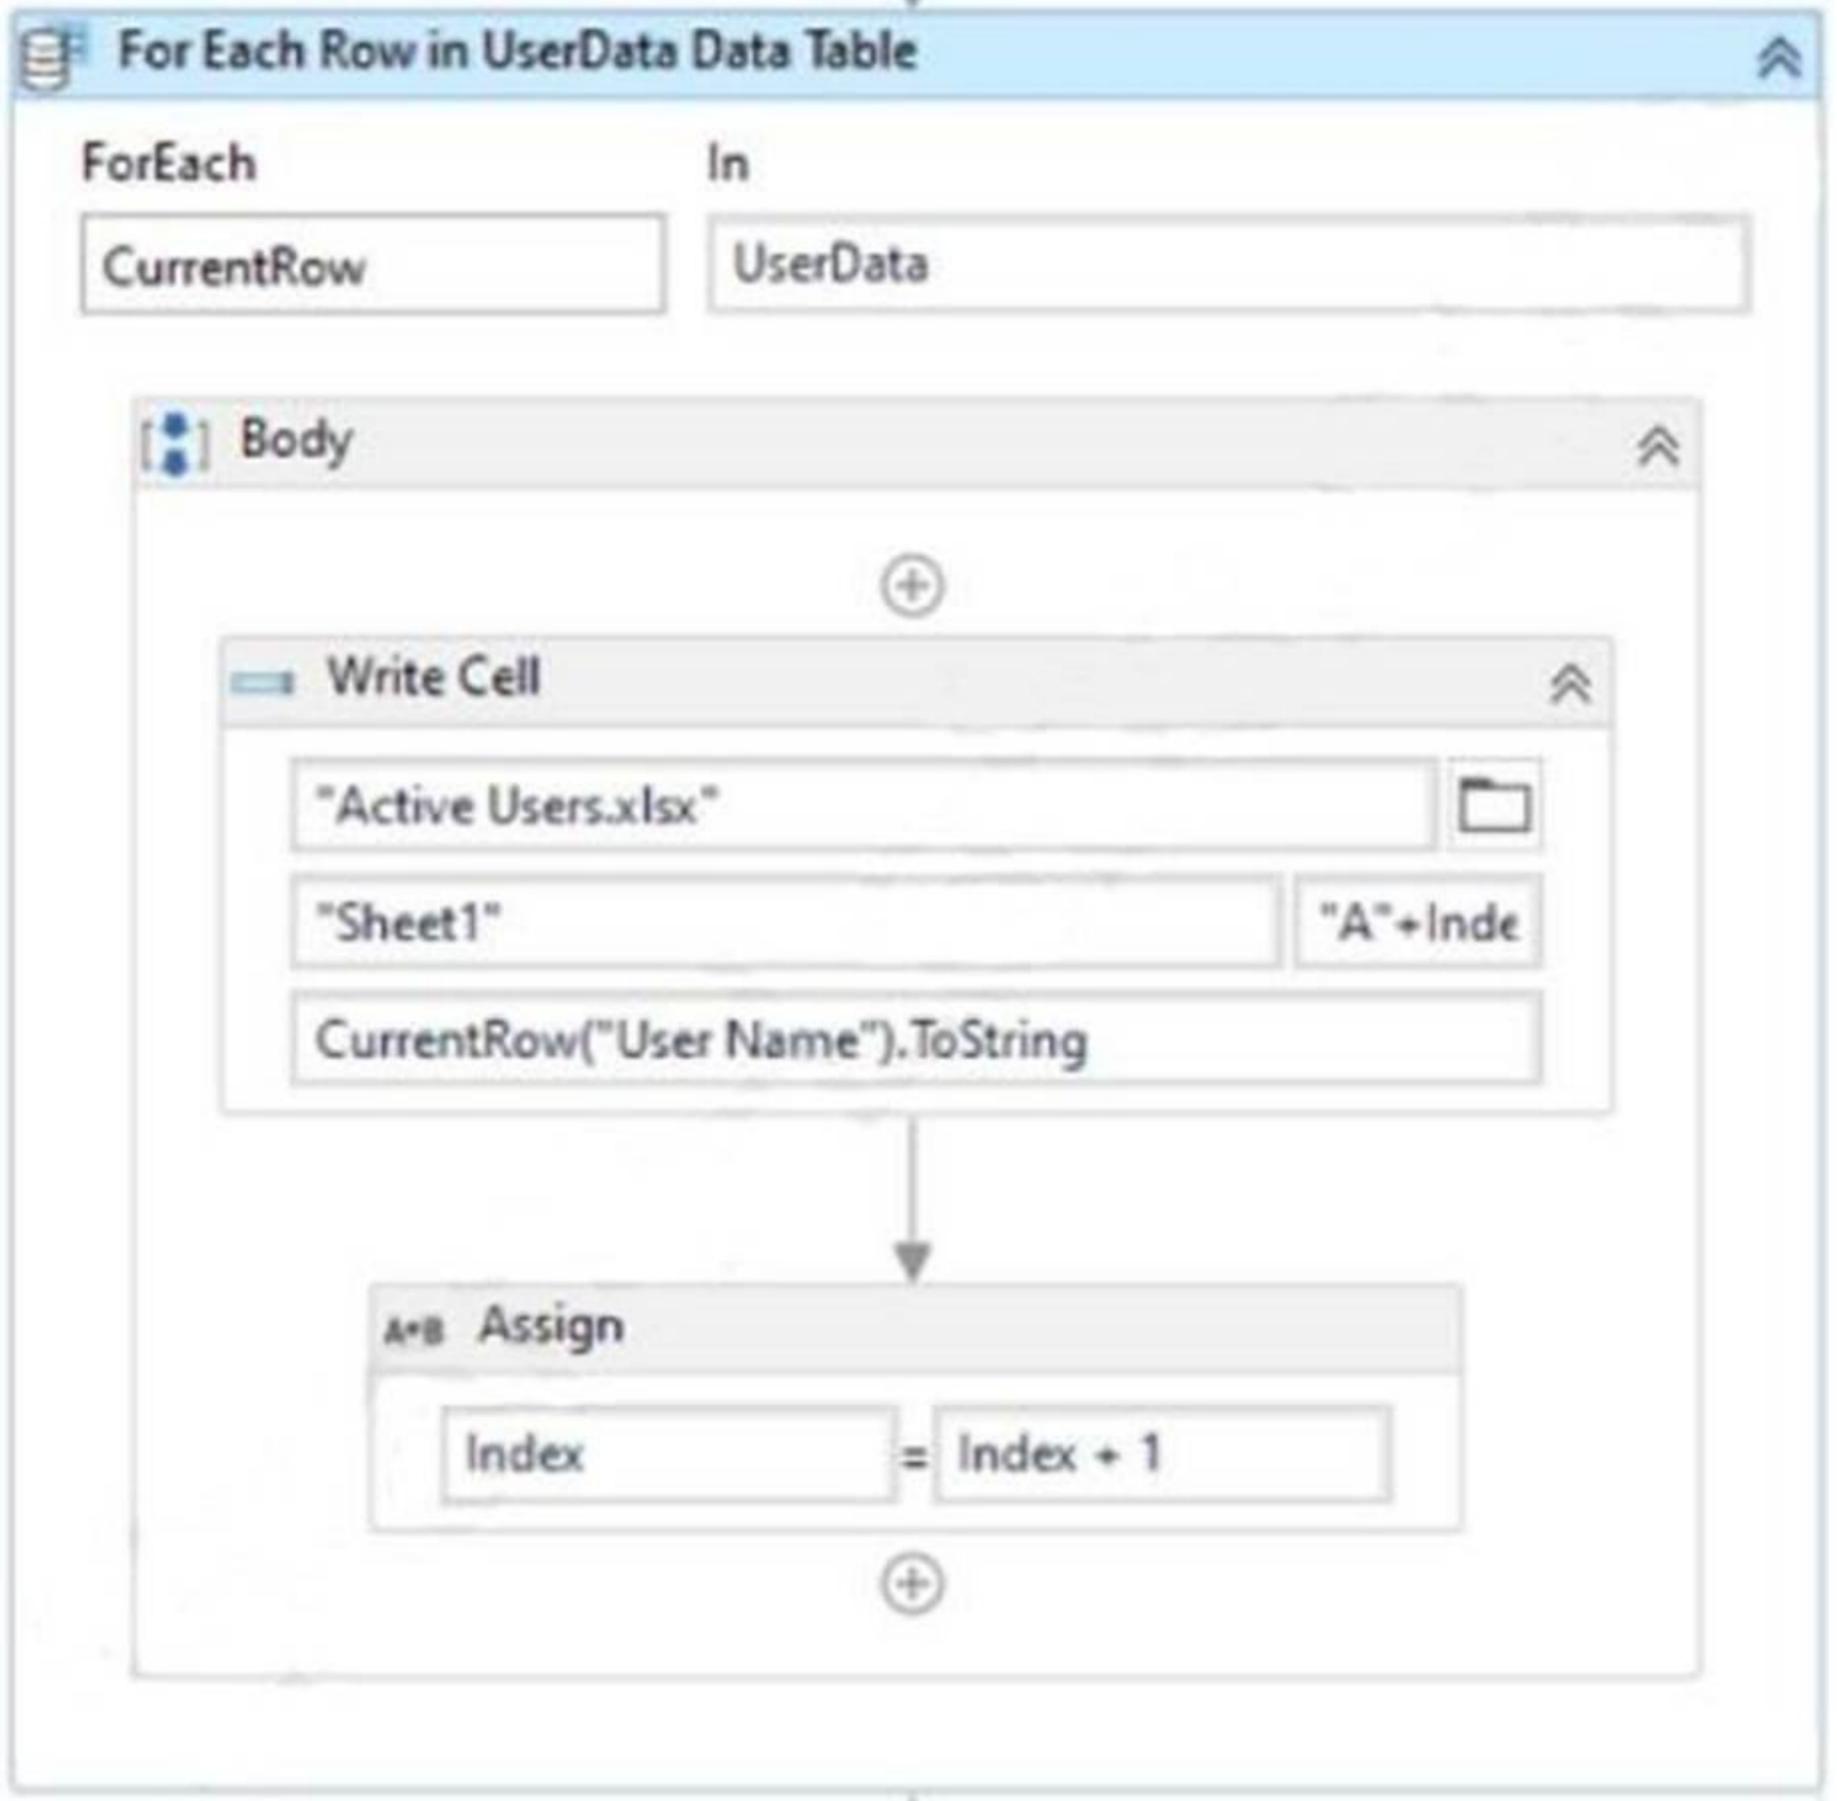

The Write Cell activity has the following properties:

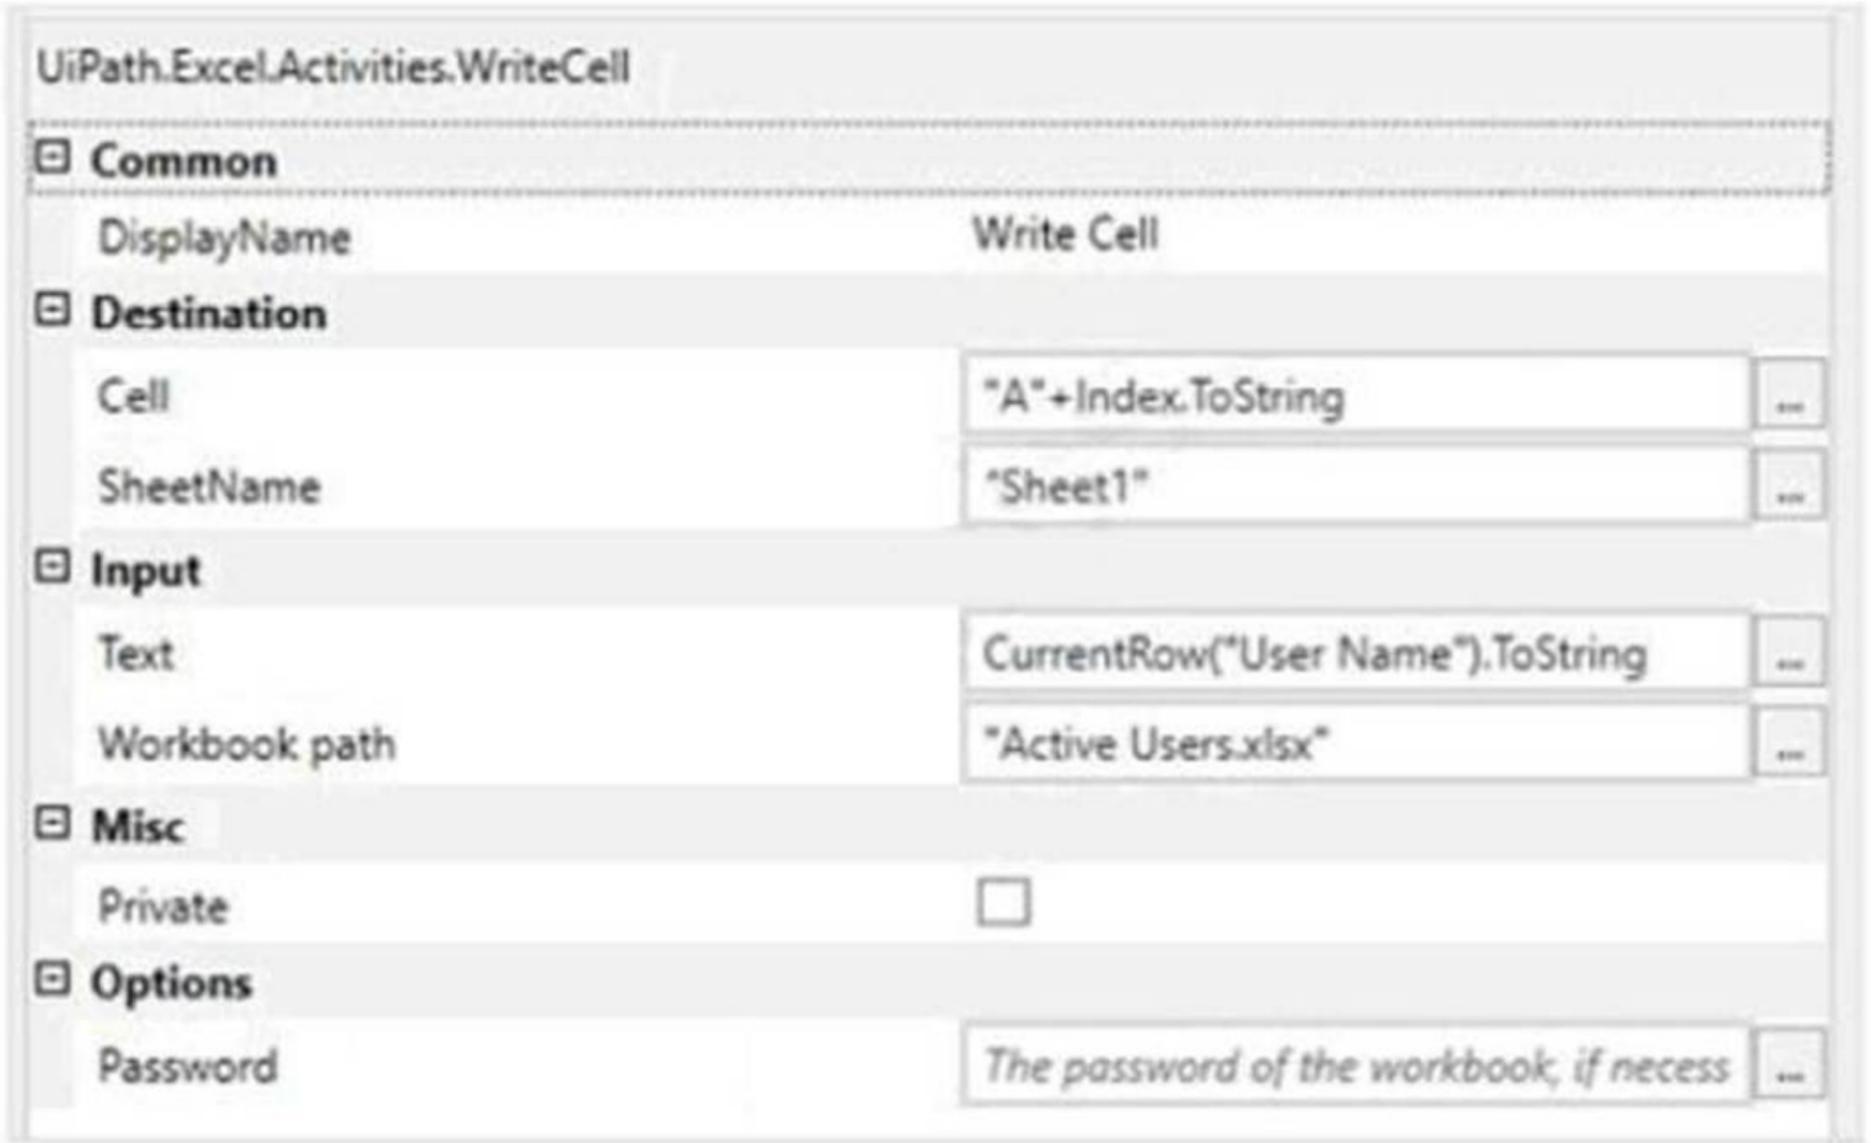

What is the behavior of the sequence once executed?

- A. Writes the values in the same row in the Active Users.xlsx Excel file
- B. Writes the values in subsequent rows in the UserName datatable
- C. Writes the values in subsequent rows in the Active Users.xlsx Excel file
- D. Writes the values in the same row in the UserName datatable

Answer: C

NEW QUESTION 179

- (Topic 3)

A developer creates a Dispatcher process which extracts information from a Microsoft Excel file and uploads that information into an Orchestrator queue. Based on best practice, what is the recommended way to avoid creating duplicate Queue Items?

- A. Enable the Enforce unique references field of the queueAdd a descriptive "Reference" in the Add Queue Item activity
- B. Add a descriptive "Reference" in the Add Queue Item activityEnsure that the "Reference" does not equal the "Reference" of the Queue Item last loaded
- C. Create an Excel file of processed Queue ItemsLoop through the list to check if the current Queue Item to upload has been uploaded before
- D. Disable the Enforce unique references field of the queue Enable the "Auto Retry" of the queue


Answer: B

NEW QUESTION 181

HOTSPOT - (Topic 3)

A developer wants to use the Robotic Enterprise (RE) Framework to automate a business process. The TransactionData of this process is a collection(List<String>) of vendor names.

From the drop-down list shown in the exhibit, select the variable type for the TransactionItem.

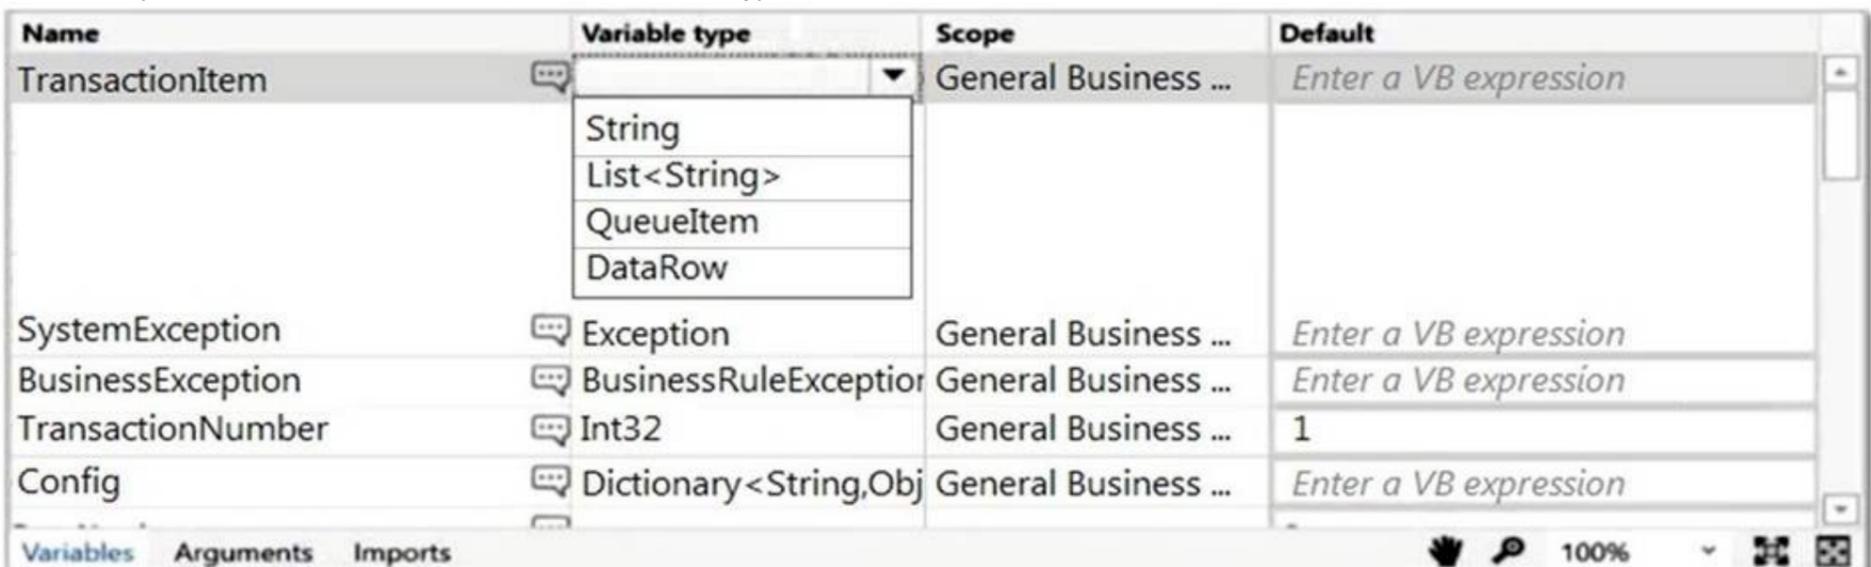

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Name	Variable type	Scope	Default
TransactionItem	String	General Business ...	Enter a VB expression
SystemException	Exception	General Business ...	Enter a VB expression
BusinessException	BusinessRuleException	General Business ...	Enter a VB expression
TransactionNumber	Int32	General Business ...	1
Config	Dictionary<String,Obj	General Business ...	Enter a VB expression

NEW QUESTION 186

- (Topic 3)

A developer needs to ensure a UI element with a partially changing attribute can be consistently identified with a Click activity. Which property of the Click activity can support a wildcard?

- A. Element
- B. Selector
- C. ClippingRegion
- D. ClickType

Answer: B

Explanation:

Reference: <https://docs.uipath.com/studio/docs/selectors-with-wildcards>

NEW QUESTION 187

- (Topic 3)

A developer automated a Performer process using the Robotic Enterprise (RE) Framework. Which state executes after the Process Transaction state has a result of "Success"?

- A. Process Transaction
- B. Get Transaction Data
- C. End Process
- D. Initialization

Answer: B

Explanation:

Reference: <https://www.edureka.co/blog/uipath-reframework/>

NEW QUESTION 192

.....

Relate Links

100% Pass Your UiPath-ARDv1 Exam with ExamBible Prep Materials

<https://www.exambible.com/UiPath-ARDv1-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>