

## Exam Questions 350-901

Developing Applications using Cisco Core Platforms & APIs

<https://www.2passeasy.com/dumps/350-901/>



#### NEW QUESTION 1

A developer has created an application based on customer requirements. The customer needs to run the application with the minimum downtime. Which design approach regarding high-availability applications, Recovery Time Objective, and Recovery Point Objective must be taken?

- A. Active/passive results in lower RTO and RP
- B. For RPO, data synchronization between the two data centers must be timely to allow seamless request flow.
- C. Active/passive results in lower RTO and RP
- D. For RPO, data synchronization between the two data centers does not need to be timely to allow seamless request flow.
- E. Active/active results in lower RTO and RP
- F. For RPO, data synchronization between the two data centers does not need to be timely to allow seamless request flow.
- G. Active/active results in lower RTO and RP
- H. For RPO, data synchronization between the two data centers must be timely to allow seamless request flow.

**Answer:** A

#### NEW QUESTION 2

A cloud native project is being worked on in which all source code and dependencies are written in Python, Ruby, and/or JavaScript. A change in code triggers a notification to the CI/CD tool to run the CI/CD pipeline.

Which step should be omitted from the pipeline?

- A. Deploy the code to one or more environments, such as staging and/or production.
- B. Build one of more containers that package up code and all its dependencies.
- C. Compile code.
- D. Run automated tests to validate the correctness.

**Answer:** A

#### NEW QUESTION 3

An organization manages a large cloud-deployed application that employs a microservices architecture across multiple data centers. Reports have received about application slowness. The container orchestration logs show that faults have been raised in a variety of containers that caused them to fail and then spin up brand new instances.

Which two actions can improve the design of the application to identify the faults? (Choose two.)

- A. Automatically pull out the container that fails the most over a time period.
- B. Implement a tagging methodology that follows the application execution from service to service.
- C. Add logging on exception and provide immediate notification.
- D. Do a write to the datastore every time there is an application failure.
- E. Implement an SNMP logging system with alerts in case a network link is slow.

**Answer:** BC

#### NEW QUESTION 4


Which two statements about a stateless application are true? (Choose two.)

- A. Different requests can be processed by different servers.
- B. Requests are based only on information relayed with each request.
- C. Information about earlier requests must be kept and must be accessible.
- D. The same server must be used to process all requests that are linked to the same state.
- E. No state information can be shared across servers.

**Answer:** AB

#### NEW QUESTION 5

DRAG DROP

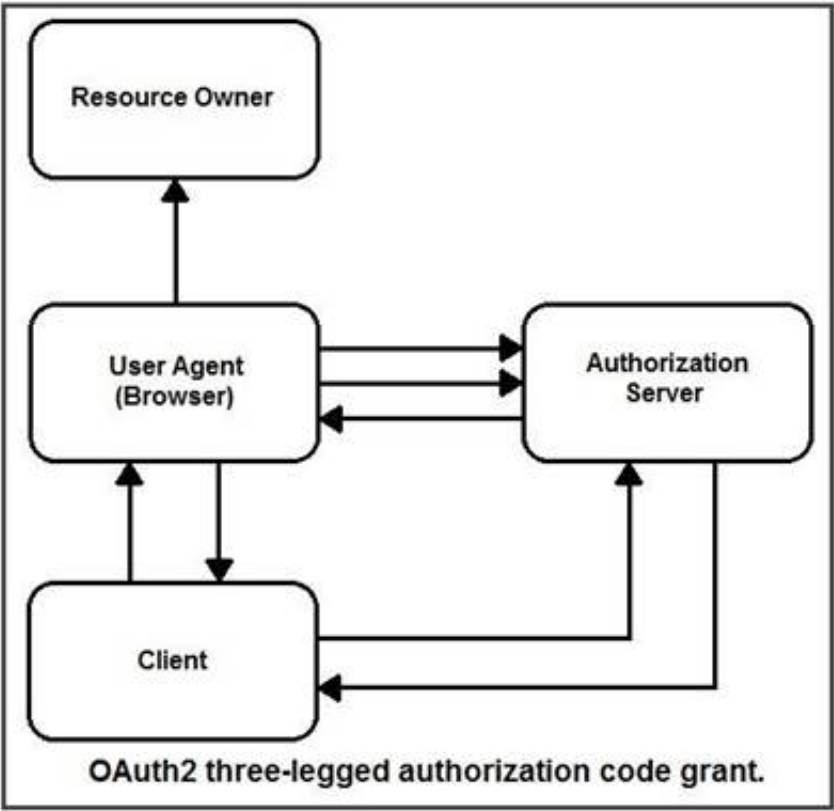

Refer to the exhibit. Drag and drop the steps from the left into the correct order of operation on the right for a successful OAuth2 three-legged authorization code grant flow.  
Select and Place:

Answer Area

Client initiates the flow.	step 1
The authorization server authenticates the client, validates details sent, and responds with an access token.	step 2
The authorization server redirects the user-agent back to the client using the redirection URI provided.	step 3
The authorization server authenticates the resource owner.	step 4
The client requests an access token from the authorization server's token endpoint.	step 5

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

Client initiates the flow.	Client initiates the flow.
The authorization server authenticates the client, validates details sent, and responds with an access token.	The authorization server redirects the user-agent back to the client using the redirection URI provided.
The authorization server redirects the user-agent back to the client using the redirection URI provided.	The authorization server authenticates the resource owner.
The authorization server authenticates the resource owner.	The client requests an access token from the authorization server's token endpoint.
The client requests an access token from the authorization server's token endpoint.	The authorization server authenticates the client, validates details sent, and responds with an access token.

NEW QUESTION 6

Which two methods are API security best practices? (Choose two.)

- A. Use tokens after the identity of a client has been established.
- B. Use the same operating system throughout the infrastructure.
- C. Use encryption and signatures to secure data.
- D. Use basic auth credentials over all internal API interactions.
- E. Use cloud hosting services to manage security configuration.

Answer: AC

NEW QUESTION 7

A developer has completed the implementation of a REST API, but when it is executed, it returns a 401 error message. What must be done on the API to resolve

the issue?

- A. Access permission to the resource must be granted, before the request.
- B. Configure new valid credentials.
- C. The requested API endpoint does not exist, and the request URL must be changed.
- D. Additional permission must be granted before the request can submitted.

**Answer:** D

#### NEW QUESTION 8

A user is receiving a 429 Too Many Requests error. Which scheme is the server employing that causes this error?

- A. rate limiting
- B. time outs
- C. caching
- D. redirection

**Answer:** A


#### NEW QUESTION 9

A client is written that uses a REST API to interact with a server. Using HTTPS as the transport, an HTTP request is sent and received an HTTP response. The response contains the HTTP response status code: 503 Service Unavailable. Which action is the appropriate response?

- A. Add an Authorization header that supplies appropriate credentials and sends the updated request.
- B. Resend the request using HTTP as the transport instead of HTTPS.
- C. Add an Accept header that indicates the content types that the client understands and send the updated request.
- D. Look for a Retry-After header in the response and resend the request after the amount of time indicated.

**Answer:** A

#### NEW QUESTION 10

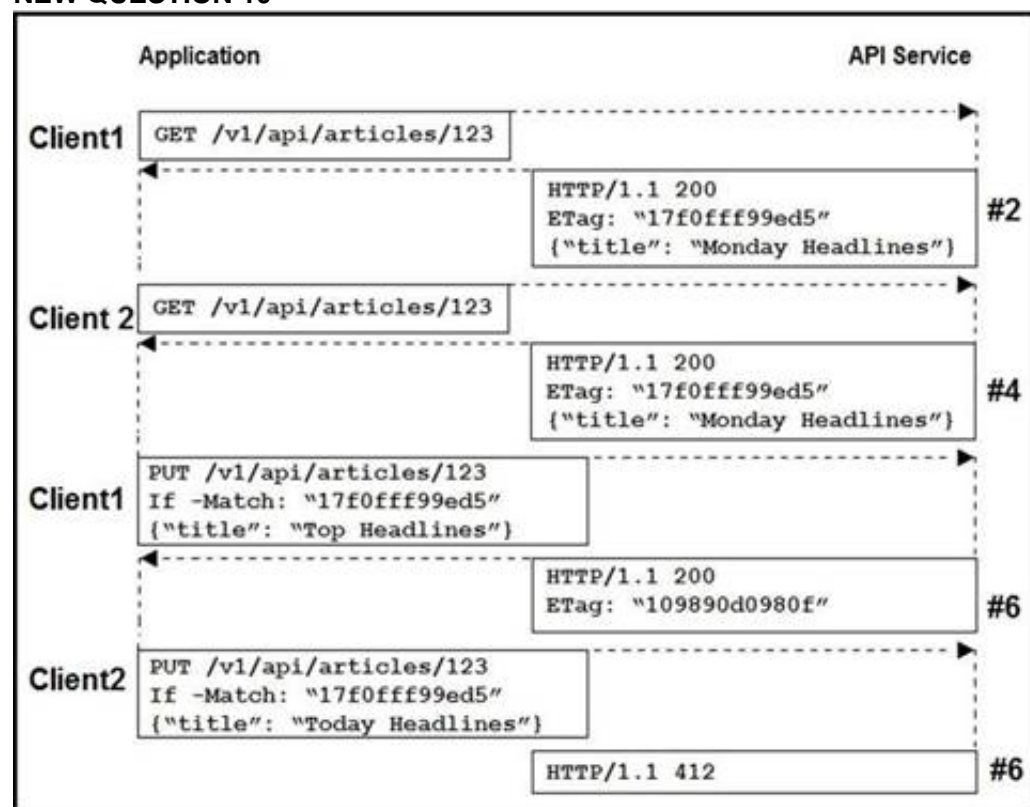

Refer to the exhibit. Two editors are concurrently updating an article's headline from their mobile devices. What results from this scenario based on this REST API sequence?

- A. The article is marked as "Conflicted"
- B. The article headline is "Monday Headlines"
- C. The article headline is "Today Headlines"
- D. The article headline is "Top Headlines"

**Answer:** B

#### NEW QUESTION 10

Which snippet presents the correct API call to configure, secure, and enable an SSID using the Meraki API?

A.



```
curl -X PUT \
--url 'https://api.meraki.com/api/v0/networks/:networkId/ssids/2' \
-H 'X-Cisco-Meraki-API-Key: 15da0c6ffff295f16267f88f98694cf29a86ed87' \
-H 'Accept: application/json' \
-H 'Content-type: application/json' \
--data-raw '{
"name": "My SSID",
"enabled": false,
"authMode": "psk",
"encryptionMode": "wpa",
"psk": "meraki123",
"wpaEncryptionMode": "WPA1 and WPA2"
}'
```

B. 

```
curl -X PUT \
--url 'https://api.meraki.com/api/v0/networks/:networkId/ssids/2' \
-H 'X-Cisco-Meraki-API-Key: 15da0c6ffff295f16267f88f98694cf29a86ed87' \
-H 'Accept: application/json' \
-H 'Content-type: application/json' \
--data-raw '{
"name": "My SSID",
"enabled": true,
"authMode": "psk",
"encryptionMode": "wpa",
"psk": "meraki123",
"wpaEncryptionMode": "WPA1 and WPA2"
}'
```

C. 

```
curl -X PUT \
--url 'https://api.meraki.com/api/v0/networks/:networkId/ssids/2' \
-H 'X-Cisco-Meraki-API-Key: 15da0c6ffff295f16267f88f98694cf29a86ed87' \
-H 'Accept: application/json' \
-H 'Content-type: application/json' \
--data-raw '{
"enabled": true,
"useVlanTagging": true
}'
```

D. 

```
curl -X PUT \
--url 'https://api.meraki.com/api/v0/networks/:networkId/ssids/2' \
-H 'X-Cisco-Meraki-API-Key: 15da0c6ffff295f16267f88f98694cf29a86ed87' \
-H 'Accept: application/json' \
-H 'Content-type: application/json' \
--data-raw '{
"name": "My SSID",
"enabled": true,
}'
```

**Answer: B**

#### NEW QUESTION 15

Which two actions must be taken when an observable microservice application is developed? (Choose two.)

- A. Know the state of a single instance of a single service.
- B. Place "try/except" statement in code.
- C. Place log statements in the code.
- D. Use distributed tracing techniques.
- E. Deploy microservice to multiple datacenters.

**Answer: BC**

#### NEW QUESTION 17

Which two countermeasures help reduce the risk of playback attacks? (Choose two.)

- A. Store data in a NoSQL database.
- B. Implement message authentication (HMAC).
- C. Enable end-to-end encryption.
- D. Remove stack traces from errors.
- E. Use short-lived access tokens.

**Answer: BE**

#### NEW QUESTION 22

```
FROM alpine:3.7
RUN apk add --no-cache bash
```

Refer to the exhibit. Which additional line results in the output of Test 1 upon execution of the docker run --rm devnet 1 command in a Dockerfile with this content?

- A. CMD ["/bin/echo", "Test"]
- B. RUN ["/bin/echo", "Test"]
- C. ENTRYPOINT ["/bin/echo", "Test"]
- D. CMD ["/bin/echo Test"]

**Answer: A**

#### NEW QUESTION 25

The response from a server includes the header ETag: W/"7eb8b94419e371767916ef13e0d6e63d". Which statement is true?

- A. The ETag has a Strong validator directive.
- B. The ETag has a Weak validator directive, which is an optional directive.
- C. The ETag has a Weak validator directive, which is a mandatory directive.
- D. The ETag has a Strong validator directive, which it is incorrectly formatted.

**Answer: B**

#### NEW QUESTION 28

Which HTTP status code indicates that a client application is experiencing intentional rate limiting by the server?

- A. 202
- B. 401
- C. 429
- D. 503

**Answer: C**

#### NEW QUESTION 32

A heterogeneous network of vendors and device types needs automating for better efficiency and to enable future automated testing. The network consists of switches, routers, firewalls and load balancers from different vendors, however they all support the NETCONF/RESTCONF configuration standards and the YAML models with every feature the business requires. The business is looking for a buy versus build solution because they cannot dedicate engineering resources, and they need configuration diff and rollback functionality from day 1.

Which configuration management for automation tooling is needed for this solution?

- A. Ansible
- B. Ansible and Terraform
- C. NSO
- D. Terraform
- E. Ansible and NSO

**Answer: E**

#### NEW QUESTION 35

An automated solution is needed to configure VMs in numerous cloud provider environments to connect the environments to an SDWAN. The SDWAN edge VM is provided as an image in each of the relevant clouds and can be given an identity and all required configuration via cloud-init without needing to log into the VM once online.

Which configuration management and/or automation tooling is needed for this solution?

- A. Ansible
- B. Ansible and Terraform
- C. NSO
- D. Terraform
- E. Ansible and NSO

**Answer: E**

#### NEW QUESTION 39

```
name: VRFs
ios_vrf:
  vrfs: "{{ local_vrfs }}"
  state: present
  purge: yes
```

Refer to the exhibit. The YAML represented is using the ios\_vrf module. As part of the Ansible playbook workflow, what is the result when this task is run?

- A. VRFs not defined in the host\_vars file are removed from the device.

- B. VRFs not defined in the host\_vars file are added to the device, and any other VRFs on the device remain.
- C. VRFs defined in the host\_vars file are removed from the device.
- D. VRFs are added to the device from the host\_vars file, and any other VRFs on the device are removed.

**Answer: D**

#### NEW QUESTION 43

```
- name: Configure Interfaces
  with_items: "{{interfaces}}"
  netconf_config:
    <<: *host_info
    xml: |
      <config>
        <interfaces xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces">
          <interface>
            <name>{{item.interface_type}}{{item.interface_id}}</name>
            <description>{{item.description}}</description>
            <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-type">ianaift:ethernetCsmacd</type>
            <enabled>true</enabled>
            <ipv4 xmlns="urn:ietf:params:xml:ns:yang:ietf-ip">
              <address>
                <ip>{{item.ip_address}}</ip>
                <netmask>{{item.subnet_mask}}</netmask>
              </address>
            </ipv4>
          </interface>
        </interfaces>
      </config>
```

Refer to the exhibit. As part of the Ansible playbook workflow, several new interfaces are being configured using the netconf\_config module. The task references the interface variables that are unique per device. In which directory is the YAML file with these variables found?

- A. host\_vars directory
- B. home directory
- C. group\_vars directory
- D. current working directory

**Answer: A**

#### NEW QUESTION 45

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 350-901 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 350-901 Product From:

<https://www.2passeasy.com/dumps/350-901/>

## Money Back Guarantee

### 350-901 Practice Exam Features:

- \* 350-901 Questions and Answers Updated Frequently
- \* 350-901 Practice Questions Verified by Expert Senior Certified Staff
- \* 350-901 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 350-901 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year