

Salesforce

Exam Questions JavaScript-Developer-I

Salesforce Certified JavaScript Developer I



NEW QUESTION 1

Refer to the following code:

Let sampleText = 'The quick brown foxjumps';

A developer needs to determine if a certain substring is part of a string. Which three expressions return true for the given substring ?

Choose 3 answers

- A. sampleText.includes('fox');
- B. sampleText.includes(' quick ', 4);
- C. sampleText.includes('Fox ', 3)
- D. sampleText.includes(' fox ');
- E. sampleText.includes(' quick ') !== -1;

Answer: BDE

NEW QUESTION 2

Refer to the code below:

```
01 let o = {  
02   get js() {  
03     let city1 = String('St.Louis');  
04     let city2 = String('New York');  
05  
06     return {  
07       firstCity: city1.toLowerCase(),  
08       secondCity: city2.toLowerCase(),  
09     }  
10   }  
11 }
```

What value can a developer expect when referencing o.js.secondCity?

- A. Undefined
- B. ' new york '
- C. ' New York '
- D. An error

Answer: B

NEW QUESTION 3

Refer to the code below: Let str = 'javascript'; Str[0] = 'J';

Str[4] = 'S';

After changing the string index values, the value of str is 'javascript'. What is the reason for this value:

- A. Non-primitive values are mutable.
- B. Non-primitive values are immutable.
- C. Primitive values are mutable.
- D. Primitive values are immutable.

Answer: D

NEW QUESTION 4

A team that works on a big project uses npm to deal with projects dependencies. A developer added a dependency does not get downloaded when they executenpm install.

Which two reasons could be possible explanations for this?

Choose 2 answers

- A. The developer missed the option --add when adding the dependency.
- B. The developer added the dependency as a dev dependency, and NODE_ENV is set to production.
- C. The developer missed the option --save when adding the dependency.
- D. The developer added the dependency as a dev dependency, and NODE_ENV is set to production.

Answer: BCD

NEW QUESTION 5

A developer wants to use a try...catch statement to catch any error that countSheep () may throw and pass it to a handleError () function.

What is the correct implementation of the try...catch?

A)

```
try {
  setTimeout(function() {
    countSheep();
  }, 1000);
} catch (e) {
  handleError(e);
}
```

B)

```
try {
  countSheep();
} finally {
  handleError(e);
}
```

C)

```
setTimeout(function() {
  try {
    countSheep();
  } catch (e) {
    handleError(e);
  }
}, 1000);
```

D)

```
try {
  countSheep();
} handleError (e){
  catch(e):
```

- A. Option
- B. Option
- C. Option
- D. Option

Answer: A**NEW QUESTION 6**

A developer creates an object where its properties should be immutable and prevent properties from being added or modified. Which method should be used to execute this business requirement ?

- A. Object.const()
- B. Object.eval()
- C. Object.lock()
- D. Object.freeze()

Answer: D**NEW QUESTION 7**

Which function should a developer use to repeatedly execute code at a fixed interval ?

- A. setInterval
- B. setTimeout
- C. setPeriod
- D. setInteria

Answer: A**NEW QUESTION 8**

A developer is setting up a new Node.js server with a client library that is built using events and callbacks. The library:

- * Will establish a web socket connection and handle receipt of messages to the server
- * Will be imported with require, and made available with a variable called we.

The developer also wants to add error logging if a connection fails.

Given this info, which code segment shows the correct way to set up a client with two events that listen at execution time?

A.

```
04 ws.connect(() => {
05   console.log('Connected to client');
06 }).catch((error) => {
07   console.log('ERROR', error);
08 });
```

B.

```
04 ws.on('connect', () => {
05   console.log('Connected to client');
06
07   ws.on('error', (error) => {
08     console.log('ERROR', error);
09   });
10 });
```

C.

```
04 ws.on('connect', () => {
05   console.log('Connected to client');
06 });
07
08 ws.on('error', (error) => {
09   console.log('ERROR', error);
10 });
```

D.

```
04 try {
05   ws.connect() => {
06     console.log('Connected to client');
07   });
08 } catch(error) {
09   console.log('ERROR', error);
10 }
```

Answer: C

NEW QUESTION 9

Given the code below: Function myFunction(){ A =5;
Var b =1;
}
myFunction(); console.log(a); console.log(b);
What is the expected output?

- A. Both lines 08 and 09 are executed, and the variables are outputted.
- B. Line 08 outputs the variable, but line 09 throws an error.
- C. Line 08 throws an error, therefore line 09 is never executed.
- D. Both lines 08 and 09 are executed, but values outputted are undefined.

Answer: B

NEW QUESTION 10

Which javascript methods can be used to serialize an object into a string and deserialize a JSON string into an object, respectively?

- A. JSON.stringify and JSON.parse
- B. JSON.serialize and JSON.deserialize
- C. JSON.encode and JSON.decode
- D. JSON.parse and JSON.deserialize

Answer: A

NEW QUESTION 10

A developer wrote the following code to test a sum3 function that takes in an array of numbers and returns the sum of the first three numbers in the array, and the test passes.

A different developer made changes to the behavior of sum3 to instead sum only the first two numbers present in the array.

```
01 let res = sum3([1, 4, 1]);
02 console.assert(res === 6);
03
04 res = sum3([1, 5, 0, 5]);
05 console.assert(res === 6);
```

Which two results occur when running this test on the updated sum3 function? Choose 2 answers

- A. The line 05 assertion passes.
- B. The line 02 assertion passes.
- C. The line 02 assertion fails.
- D. The line 05 assertion fails.

Answer: BD

NEW QUESTION 14

Which code statement correctly retrieves and returns an object from localStorage?

- A. `const retrieveFromLocalStorage = () =>{return JSON.stringify(window.localStorage.getItem(storageKey));}` `const retrieveFromLocalStorage = () => {
 return JSON.stringify(window.localStorage.getItem(storageKey));
}`
- B. `const retrieveFromLocalStorage = (storageKey) =>{ return window.localStorage.getItem(storageKey);}` `const retrieveFromLocalStorage = (storageKey) => {
 return window.localStorage.getItem(storageKey);
}`
- C. `const retrieveFromLocalStorage = (storageKey) =>{ returnJSON.parse(window.localStorage.getItem(storageKey));}` `const retrieveFromLocalStorage = (storageKey) => {
 return JSON.parse(window.localStorage.getItemstorageKey);
}`
- D. `const retrieveFromLocalStorage = (storageKey) =>{ return window.localStorage[storageKey];}` `const retrieveFromLocalStorage = (storageKey) => {
 return window.localStorage[storageKey];
}`

Answer: C

NEW QUESTION 18

Refer to code below:

```
Const objBook = { Title: 'Javascript',  
};
```

```
Object.preventExtensions(objBook); ConstnewObjBook = objBook; newObjectBook.author = 'Robert';
```

What are the values of objBook and newObjBook respectively ?

- A. [title: "javaScript"] [title: "javaScript"]
- B. {author: "Robert", title: "javaScript} Undefined
- C. {author: "Robert", title: "javaScript}{author: "Robert", title: "javaScript}
- D. {author: "Robert"}{author: "Robert", title: "javaScript}

Answer: A

NEW QUESTION 23

Given the code below:

```
const copy = JSON.stringify([ new String(' false '), new Bollean( false ), undefined ]);
```

What is the value of copy?

- A. -- [\"false\" , { }]-
- B. -- [false, { }]-
- C. -- [\"false\" , false, undefined]-
- D. -- [\"false\" ,false, null]-

Answer: D

NEW QUESTION 28

Given the following code:

```
01 let x = null;  
02 console.log(typeof x);
```

is the output of line 02?

- A. "x"
- B. "null"
- C. "object"
- D. "undefined"

Answer: C

NEW QUESTION 29

A developer writes the code below to calculate the factorial of a given number.


```
01 function factorial(number) {  
02     return number * factorial(number - 1);  
03 }  
04 factorial(3);
```

What is the result of executing line 04?

- A. 6
- B. -Infinity
- C. RuntimeError

Answer: D

Explanation:

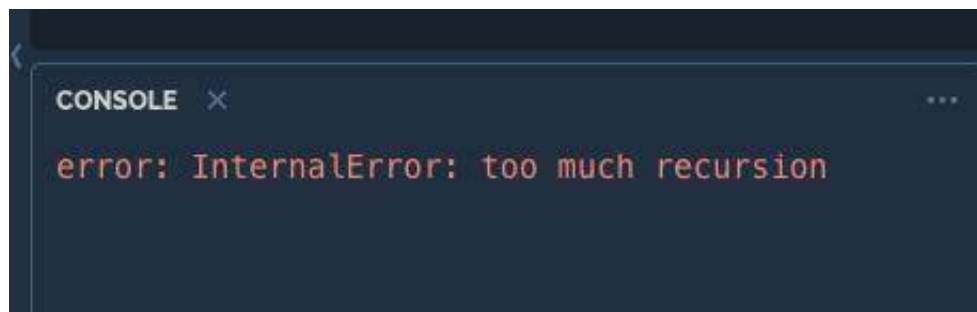

NEW QUESTION 33

Refer to code below:

```
01 function Person() {
02   this.firstName = 'John';
03 }
04
05 Person.prototype = {
06   job: x => 'Developer'
07 };
08
09 const myFather = new Person();
10 const result = myFather.firstName + ' ' + myFather.job();
```

What is the value of the result after line 10 executes?

- A. Error: myFather.job is not a function
- B. Undefined Developer
- C. John undefined
- D. John Developer

Answer: D

NEW QUESTION 35

Refer to the code below: Let textValue = '1984';

Which code assignment shows a correct way to convert this string to an integer?

- A. let numberValue = Number(textValue);
- B. Let numberValue = (Number)textValue;
- C. Let numberValue = textValue.toInteger();
- D. Let numberValue = Integer(textValue);

Answer: A

NEW QUESTION 36

At Universal Containers, every team has its own way of copying JavaScript objects. The code Snippet shows an implementation from one team:

```
01 function Person() {
02   this.firstName = "John";
03   this.lastName = "Doe";
04   this.name = () => {
05     console.log('Hello ${this.firstName} ${this.lastName}');
06   }
07 }
08
09 const john = new Person();
10 const dan = JSON.parse(JSON.stringify(john));
11 dan.firstName = 'Dan';
12 dan.name();
```

What is the Output of the code execution?

- A. Hello Dan Doe
- B. Hello John DOe
- C. TypeError: dan.name is not a function
- D. TypeError: Assignment to constant variable.

Answer: C

NEW QUESTION 39

A developer wants to use a module named universalContainersLib and then call functions from it.

How should a developer import every function from the module and then call the functions foo and bar?

- A. import * from '/path/universalContainersLib.js'; universalContainersLi
- B. foo ()7 universalContainersLib.bar ();
- C. import {foo,bar} from '/path/universalCcontainersLib.js'; foo():bar()?
- D. import all from '/path/universalContainersLib.js'; universalContainersLib.foo(); universalContainersLib.bar ();
- E. import * as lib from '/path/universalContainersLib.js'; lib.foo();li
- F. bar ();

Answer: D

NEW QUESTION 40

developer publishes a new version of a package with new features that do not break backward compatibility. The previous version number was 1.1.3. Following semantic versioning format, what should the new package version number be?

- A. 2.0.0
- B. 1.2.3
- C. 1.1.4
- D. 1.2.0

Answer: D

NEW QUESTION 41

A developer wants to leverage a module to print a price in pretty format, and has imported a method as shown below:

Import printPrice from '/path/PricePrettyPrint.js';

Based on the code, what must be true about the printPrice function of the PricePrettyPrint module for this import to work ?

- A. printPrice must be be a named export
- B. printPrice must be an all export
- C. printPrice must be the default export
- D. printPrice must be a multi exportc

Answer: C

NEW QUESTION 45

Given the following code: Let x =(‘15’ + 10)*2;
What is the value of a?

- A. 3020
- B. 1520
- C. 50
- D. 35

Answer: A

NEW QUESTION 46

Refer to the code below? LetsearchString = ‘ look for this ’;

Which two options remove the whitespace from the beginning of searchString? Choose 2 answers

- A. searchString.trimEnd();
- B. searchString.trimStart();
- C. trimStart(searchString);
- D. searchString.replace(/*\s*/, “”);

Answer: BD

NEW QUESTION 49

Universal Containers recently launched its new landing page to host a crowd-funding campaign. The page uses an external library to display some third-party ads. Once the page is fully loaded, it creates more than 50 new HTML items placed randomly inside the DOM, like the one in the code below:

```
<!-- This is an ad -->
<div class="ad-library-item ad-hidden" onload="myFunction()">
  
</div>
```

All the elements includes the same ad-library-item class, They are hidden by default, and they are randomly displayed while the user navigates through the page.

- A. Use the DOM inspector to prevent the load event to be fired.
- B. Use the browser to execute a script that removes all the element containing the class ad-library-item.
- C. Use the DOM inspector to remove all the elements containing the class ad-library-item.
- D. Use the browser console to execute a script that prevents the load event to be fired.

Answer: B

NEW QUESTION 52

Universal Container(UC) just launched a new landing page, but users complain that the website is slow. A developer found some functions that cause this problem. To verify this, the developer decides to do everything and log the time each of these three suspicious functions consumes.

console.time(‘Performance’); maybeAHeavyFunction(); thisCouldTakeTooLong(); orMaybeThisOne(); console.endTime(‘Performance’);

Which function can the developer use to obtain the time spent by every one of the three functions?

- A. console.timeLog()
- B. console.getTime()
- C. console.trace()
- D. console.timeStamp()

Answer: A

NEW QUESTION 57

Refer to the code below: function changeValue(param) { Param =5;
}
Let a =10;
Let b =5; changeValue(b);
Const result = a+ " - "+ b;
What is the value of result when code executes?

- A. 10 -10
- B. 5 -5
- C. 5 - 10
- D. 10 - 5

Answer: A

NEW QUESTION 58

A developer uses a parsed JSON string to work with userinformation as in the block below:

```
01 const userInformation ={  
02 " id " : "user-01",  
03 "email" : "user01@universalcontainers.demo",  
04 "age" : 25
```

Which two options access the email attribute in the object? Choose 2 answers

- A. userInformation("email")
- B. userInformation.get("email")
- C. userInformation.email
- D. userInformation(email)

Answer: AC

NEW QUESTION 63

Given the following code:

```
document.body.addEventListener(' click ', (event) => { if (/* CODE REPLACEMENT HERE */) {  
console.log('button clicked!');  
}  
});
```

Which replacement for the conditional statement on line 02 allows a developer to correctly determine that a button on page is clicked?

- A. Event.clicked
- B. e.nodeTarget ==this
- C. event.target.nodeName == 'BUTTON'
- D. button.addEventListener('click')

Answer: C

NEW QUESTION 67

Refer to the code below:

```
01 const myFunction = arr => {  
02   return arr.reduce((result, current) => {  
03     return result + current;  
04   }, 10);  
05 }
```

What is the output of this function when called with an empty array?

- A. Returns 0
- B. Throws an error
- C. Returns 10
- D. Returns NaN

Answer: C

NEW QUESTION 69

Considering type coercion, what does the following expression evaluate to? True + '13' + NaN

- A. ' 113Nan '
- B. 14
- C. ' true13 '

D. 'true13NaN'

Answer: D

NEW QUESTION 74

A developer creates a class that represents a blog post based on the requirement that a Post should have a body author and view count.

The Code shown Below: ClassPost {

// Insert code here This.body =body This.author = author;

this.viewCount = viewCount;

}

}

Which statement should be inserted in the placeholder on line 02 to allow for a variable to be set to a new instance of a Post with the three attributes correctly populated?

A. super (body, author, viewCount) {

B. Function Post (body, author, viewCount) {

C. constructor (body, author, viewCount) {

D. constructor() {

Answer: C

NEW QUESTION 77

Refer to the code:

```
01 function Animal(size, type) {
02   this.size = size || 'small';
03   this.type = type || 'Animal';
04   this.canTalk = false;
05 }
06
07 let Pet = function(size, type, name, owner) {
08   Animal.call(this, size, type);
09   this.name = name;
10   this.owner = owner;
11 }
12
13 Pet.prototype = Object.create(Animal.prototype);
14 let pet1 = new Pet();
```

Given the code above, which three properties are set pet1? Choose 3 answers:

A. Name

B. canTalk

C. Type

D. Owner

E. Size

Answer: BCE

NEW QUESTION 82

Universal Containers (UC) just launched a new landing page, but users complain that the website is slow. A developer found some functions any that might cause this problem. To verify this, the developer decides to execute everything and log the time each of these three suspicious functions consumes.

Which function can the developer use to obtain the time spent by every one of the three functions?

```
01 console.time('Performance');
02
03 maybeAHeavyFunction();
04
05 thisCouldTakeTooLong();
06
07 orMaybeThisOne();
08
09 console.endTime('Performance');
```

A. consol

B. timeLog ()

C. console.timeStamp ()

D. console.trace()

E. console.getTime ()

Answer: A

NEW QUESTION 83

Cloud Kicks has a class to represent items for sale in an online store, as shown below: Class Item{
constructor (name, price){ this.name = name; this.price = price;
}

formattedPrice(){
return 's' + String(this.price);}}

A new business requirement comes in that requests a ClothingItem class that should have all of the properties and methods of the Item class but will also have properties that are specific to clothes.

Which line of code properly declares the clothingItem class such that it inherits from Item?

- A. Class ClothingItem implements Item{
- B. Class ClothingItem {
- C. Class ClothingItem super Item {
- D. Class ClothingItem extends Item {

Answer: D

NEW QUESTION 87

Refer to the following code:

```
<html lang="en">
<body>
<div onclick = "console.log('Outer message') ;">
<button id ="myButton">Click me<button>
</div>
</body>
<script>
function displayMessage(ev) { ev.stopPropagation(); console.log('Inner message.')}
}
const elem =document.getElementById('myButton'); elem.addEventListener('click' , displayMessage);
</script>
</html>
```

What will the console show when the button is clicked?

- A. Outer message
- B. Outer message Inner message
- C. Inner message Outer message
- D. Inner message

Answer: D

NEW QUESTION 92

Refer to the code below: console.log("start");
Promise.resolve('Success') .then(function(value){
console.log('Success');
});
console.log('End');
What is the output after the code executes successfully?

- A. EndStart Success
- B. StartSuccess End
- C. StartEnd Success
- D. Success Start End

Answer: C

NEW QUESTION 93

A developer wants to setup a secure web server with Node.js. The developer creates a directory locally called app-server, and the first file is app-server/index.js
Without using any third-party libraries, what should the developer add to index.js to create the secure web server?

- A. const https =require('https');
- B. const server =require('secure-server');
- C. const tls = require('tls');
- D. const http =require('http');

Answer: A

NEW QUESTION 94

Refer to the code below:

```
01 function foo() {
02     const a = 2;
03     function bar() {
04         console.log(a);
05     }
06     return bar;
07 }
```

Why does the function bar have access to variable a ?

- A. Inner function's scope
- B. Hoisting
- C. Outer function's scope
- D. Prototype chain

Answer: C

NEW QUESTION 95

is below:

```
<input type="file" onchange="previewFile()">
<img src="" height="200" alt="Image Preview..." /> The JavaScript portion is:
1 function previewFile(){
2   const preview = document.querySelector('img');
3   const file = document.querySelector('input[type=file]').files[0]; 04 //line 4 code
05 reader.addEventListener("load", () =>{ 06 preview.src = reader.result;
7 },false);
8 //line 8 code
9 }
```

In lines 04 and 08, which code allows the user to select an image from their local computer , and to display the image in the browser?

- A. 04 const reader = new File();08 if (file) URL.createObjectURL(file);
- B. 04 const reader = new FileReader();08 if (file) URL.createObjectURL(file);
- C. 04 const reader = new File();08 if (file) reader.readAsDataURL(file);
- D. 04 const reader = new FileReader();08 if (file) reader.readAsDataURL(file);

Answer: D

NEW QUESTION 97

Given the code below:

```
01 function GameConsole(name) {
02   this.name = name;
03 }
04
05 GameConsole.prototype.load = function(gamename) {
06   console.log(`${this.name} is loading a game: ${gamename}...`);
07 }
08
09 function Console16bit(name) {
10   GameConsole.call(this, name);
11 }
12
13 Console16bit.prototype = Object.create(GameConsole.prototype);
14
15 //insert code here
16   console.log(`${this.name} is loading a cartridge game: ${gamename}...`);
17 }
18
19 const console16bit = new Console16bit('SNEGeneziz');
20 console16bit.load('Super Monic 3x Force');
```

What should a developer insert at line 15 to output the following message using the method ?

> SNEGeneziz is loading a cartridgegame: Super Monic 3x Force . . .

- A. Console16bit.prototype.load(gamename) = function() {
- B. Console16bit.prototype.load = function(gamename) {
- C. Console16bit = Object.create(GameConsole.prototype).load = function (gamename) {
- D. Console16bit.prototype.load(gamename) {

Answer: B

NEW QUESTION 99

A developer wrote a fizzbuzz function that when passed in a number, returns the following:

'Fizz' if the number is divisible by 3. 'Buzz' if the number is divisible by 5.

'Fizzbuzz' if the number is divisible by both 3 and 5. Emptystring if the number is divisible by neither 3 or 5.

Which two test cases will properly test scenarios for the fizzbuzz function? Choose 2 answers

- A. let res = fizzbuzz(5); console.assert (res === ' ');
- B. let res = fizzbuzz(15);console.assert (res === ' fizzbuzz ')
- C. let res = fizzbuzz(Infinity); console.assert (res === ' ')
- D. let res = fizzbuzz(3); console.assert (res === ' buzz ')

Answer: BCD

NEW QUESTION 102

Refer to the code below:

```
new Promise((resolve, reject) => { const fraction = Math.random();
```

```
if( fraction >0.5) reject("fraction > 0.5, " + fraction); resolve(fraction);
})
.then(() =>console.log("resolved"))
.catch((error) => console.error(error))
.finally(() => console.log(" when am I called?"));
```

```
new Promise((resolve, reject) => {
  const fraction = Math.random();
  if( fraction >0.5) reject("fraction > 0.5, " + fraction);
  reject(fraction);
})
.then(() =>console.log("resolved"))
.catch((error) => console.error(error))
.finally(() => console.log(" when am I called?"));
0.024493713600408196 VM1560:7
when am I called? VM1560:8
Promise {<fulfilled>: undefined}
```

```
new Promise((resolve, reject) => {
  const fraction = Math.random();
  if( fraction >0.5) reject("fraction > 0.5, " + fraction);
  resolve(fraction);
})
.then(() =>console.log("resolved"))
.catch((error) => console.error(error))
.finally(() => console.log(" when am I called?"));
resolved VM1349:6
when am I called? VM1349:8
Promise {<fulfilled>: undefined}
```

When does Promise.finally on line 08 get called?

- A. When rejected
- B. When resolved and settled
- C. WHEN resolved
- D. When resolved or rejected

Answer: D

NEW QUESTION 106

A developer is working on an ecommerce website where the delivery date is dynamically calculated based on the current day. The code line below is responsible for this calculation. Const deliveryDate = new Date ();
 Due to changes in the business requirements, the delivery date must now be today's date + 9 days.
 Which code meets thisnew requirement?

- A. deliveryDate.setDate((new Date ()).getDate () +9);
- B. deliveryDate.setDate(Date.current () + 9);
- C. deliveryDate.date = new Date(+9) ;
- D. deliveryDate.date = Date.current () + 9;

Answer: A

NEW QUESTION 107

Refer to the code below: let timeFunction =() => {
 console.log('Timer called.');

```
};
let timerId = setTimeout (timedFunction, 1000);
```

Which statement allows a developer to cancel the scheduled timed function?

- A. removeTimeout(timedFunction);
- B. removeTimeout(timerId);
- C. clearTimeout(timerId);
- D. clearTimeout(timedFunction);

Answer: C

NEW QUESTION 110

Which statement accurately describes the behaviour of the async/ await keywords ?

- A. The associated class contains some asynchronous functions.
- B. The associated function will always return a promise
- C. The associated function can only be called via asynchronous methods
- D. The associated sometimes returns a promise.

Answer: B

NEW QUESTION 114

Which option is a core Node.js module?

- A. Path
- B. los
- C. Memory
- D. locate

Answer: A

NEW QUESTION 119

A developer has the function, shown below, that is called when a page loads.

```
function onLoad() {  
    console.log("Page has loaded!");  
}
```

Where can the developer see the log statement after loading the page in the browser?

- A. Terminal running the web server.
- B. Browser performance tools
- C. Browser JavaScript console
- D. On the webpage.

Answer: C

NEW QUESTION 123

What are two unique features of functions defined with a fat arrow as compared to normal function definition?
Choose 2 answers

- A. The function generated its own this making it useful for separating the function's scope from its enclosing scope.
- B. The function receives an argument that is always in scope, called parentThis, which is the enclosing lexical scope.
- C. If the function has a single expression in the function body, the expression will be evaluated and implicitly returned.
- D. The function uses the this from the enclosing scope.

Answer: AC

NEW QUESTION 124

Given a value, which three options can a developer use to detect if the value is NaN? Choose 3 answers !

- A. value == NaN
- B. Object.is(value, NaN)
- C. value === Number.NaN
- D. value !== value
- E. Number.isNaN(value)

Answer: AE

NEW QUESTION 128

A developer is debugging a web server that uses Node.js. The server hits a runtime error every third request to an important endpoint on the web server. The developer added a break point to the start script, that is at index.js at the root of the server's source code. The developer wants to make use of Chrome DevTools to debug. Which command can be run to access DevTools and make sure the breakpoint is hit ?

- A. node -i index.js
- B. Node --inspect-brk index.js
- C. Node inspect index.js
- D. Node --inspect index.js

Answer: D

NEW QUESTION 129

A developer has two ways to write a function: Option A:

```
function Monster() { this.growl = () => { console.log("Grr!"); }  
}
```

Option B:

```
function Monster() {}; Monster.prototype.growl = () => { console.log("Grr!"); }  
}
```

After deciding on an option, the developer creates 1000 monster objects. How many growl methods are created with Option A? Option B?

- A. 1 growl method is created for Option
- B. 1000 growl methods are created for Option B.
- C. 1000 growl method is created for Option
- D. 1 growl methods are created for Option B.
- E. 1000 growl methods are created regardless of which option is used.
- F. 1 growl method is created regardless of which option is used.

Answer: B

NEW QUESTION 132

A developer creates a simple webpage with an input field. When a user enters text in the input field and clicks the button, the actual value of the field must be displayed in the console.

Here is the HTML file content:

```
<input type="text" value="Hello" name="input">
<button type="button">Display</button>
```

The developer wrote the javascript code below:

```
01 const button = document.querySelector('button');
02 button.addEventListener('click', () => {
03   const input = document.querySelector('input');
04   console.log(input.getAttribute('value'));
05 });
```

When the user clicks the button, the output is always “Hello”. What needs to be done to make this code work as expected?

- A. Replace line 04 with `console.log(input .value);`
- B. Replace line 03 with `const input = document.getElementById('input');`
- C. Replace line 02 with `button.addCallback("click", function() {`
- D. Replace line 02 with `button.addEventListener("onclick", function() {`

Answer: A

NEW QUESTION 134

Given two expressions `var1` and `var2`. What are two valid ways to return the logical AND of the two expressions and ensure it is data type `Boolean` ? Choose 2 answers:

- A. `Boolean(var1 && var2)`
- B. `var1 && var2`
- C. `var1.toBoolean() && var2.toBoolean()`
- D. `Boolean(var1) && Boolean(var2)`

Answer: AD

NEW QUESTION 137

Given code below: `setTimeout (() => (console.log(1);`

`); 0);`

`console.log(2);`

`New Promise ((resolve, reject)) => (setTimeout(() => (reject(console.log(3));`

`); 1000);`

`)).catch(() => (console.log(4);`

`));`

`console.log(5);`

What is logged to the console?

- A. 2 1 4 3 5
- B. 2 5 13 4
- C. 1 2 4 3 5
- D. 1 2 5 3 4

Answer: B

NEW QUESTION 139

A developer is leading the creation of a new browser application that will serve a single page application. The team wants to use a new web framework `Minimalsit.js`. The Lead developer wants to advocate for a more seasoned web framework that already has a community around it.

Which two frameworks should the lead developer advocate for? Choose 2 answers

- A. `Vue`
- B. `Angular`
- C. `Koa`
- D. `Express`

Answer: BD

NEW QUESTION 144

Given the JavaScript below:

```
1 function filterDOM (searchString) {
```

```
2   const parsedSearchString = searchString && searchString.toLowerCase() ;
```

```
03 document.quesrySelectorAll(' .account' ) . forEach(account => (
```

```
04   const accountName = account.innerHTML.toLowerCase();
```

```
05   account. Style.display = accountName.includes(parsedSearchString) ? /*Insert code*/;
```

```
06 });
```

```
07 }
```

Which code should replace the placeholder comment on line 05 to hide accounts that do not match the search string?

- A. ' name ' : ' block '
- B. ' Block ' : ' none '
- C. ' visible ' : ' hidden '
- D. ' hidden ' : ' visible '

Answer: B

NEW QUESTION 145

developer wants to use a module named universalContainersLib and then call functions from it.

How should a developer import every function from the module and then call the functions foo and bar ?

- A. import * as lib from '/path/universalContainersLib.js'; lib.foo();lib.bar();
- B. import (foo, bar) from '/path/universalContainersLib.js'; foo();bar();
- C. import all from '/path/universalContainerLib.js'; universalContainersLib.foo(); universalContainersLib.bar();
- D. import * from '/path/universalContainerLib.js'; universalContainersLib.foo(); universalContainersLib.bar();

Answer: A

NEW QUESTION 150

In the browser, the window object is often used to assign variables that require the broadest scope in an application. Node.js application does not have access to the window object by default.

Which two methods are used to address this ? Choose 2 answers

- A. Use the document object instead of the window object.
- B. Assign variables to the global object.
- C. Create a new window object in the root file.
- D. Assign variables to module.exports and require them as needed.

Answer: B

NEW QUESTION 153

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

JavaScript-Developer-I Practice Exam Features:

- * JavaScript-Developer-I Questions and Answers Updated Frequently
- * JavaScript-Developer-I Practice Questions Verified by Expert Senior Certified Staff
- * JavaScript-Developer-I Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * JavaScript-Developer-I Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The JavaScript-Developer-I Practice Test Here](#)