

Oracle

Exam Questions 1z0-808

Java SE 8 Programmer I



NEW QUESTION 1

Given the code fragment:

```
public static void main(String[] args) {  
    int ans;  
    try {  
        int num = 10;  
        int div = 0;  
        ans = num / div;  
    } catch (ArithmeticException ae) {  
        ans = 0; // line n1  
    } catch (Exception e) {  
        System.out.println("Invalid calculation");  
    }  
    System.out.println("Answer = " + ans); // line n2  
}
```

What is the result?

- A. Answer = 0
- B. Invalid calculation
- C. Compilation fails only at line n1.
- D. Compilation fails only at line n2.
- E. Compilation fails at line n1 and line2.

Answer: C

Explanation:

```
1  
2 public class Test {  
3     public static void main(String[] args) {  
4         int ans;  
5         try {  
6             int num = 10;  
7             int div = 0;  
8             ans = num / div;  
9         } catch (ArithmeticException ae) {  
10            ans = 0;  
11        } catch (Exception e) {  
12            System.out.println("Invalid calculation");  
13        }  
14        System.out.println("Answer = " + ans); //line n2  
15    }  
16 }  
17
```

✖ variable ans might not have been initialized

✖

NEW QUESTION 2

Given the content of three files:

A.java:

```
public class A {  
    public void a() {}  
    int a;  
}
```

B.java:

```
public class B {  
    private int doStuff() {  
        private int x = 100;  
        return x++;  
    }  
}
```

C.java:

```
import java.io.*;  
package pl;  
class A {  
    public void main(String fileName) throws IOException { }  
}
```

Which statement is true?

- A. Only the A.Java file compiles successfully.

- B. Only the B.java file compiles successfully.
- C. Only the C.java file compiles successfully.
- D. The A.java and B.java files compile successfully.
- E. The B.java and C.java files compile successfully.
- F. The A.java and C.java files compile successfully.

Answer: A

NEW QUESTION 3

Given the code fragments:

Person.java:

```
public class Person {
    String name;
    int age;

    public Person(String n, int a) {
        name = n;
        age = a;
    }

    public String getName() {
        return name;
    }

    public int getAge() {
        return age;
    }
}
```

Test.java:

```
public static void checkAge(List<Person> list, Predicate<Person> predicate) {
    for (Person p : list) {
        if (predicate.test(p)) {
            System.out.println(p.name + " ");
        }
    }
}

public static void main(String[] args) {
    List<Person> iList = Arrays.asList(new Person("Hank", 45),
                                       new Person("Charlie", 40),
                                       new Person("Smith", 38));

    //line n1
}
```

Which code fragment, when inserted at line n1, enables the code to print Hank?

- A**
`checkAge (iList, () -> p. get Age () > 40);`
- B**
`checkAge(iList, Person p -> p.getAge() > 40);`
- C**
`checkAge (iList, p -> p.getAge () > 40);`
- D**
`checkAge(iList, (Person p) -> { p.getAge() > 40; });`

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 4

You are asked to develop a program for a shopping application, and you are given this information:

- The application must contain the classes Toy, EduToy, and ConsToy. The Toy class is the superclass of the other two classes.
- The int calculatePrice (Toy t) method calculates the price of a toy.
- The void printToy (Toy t) method prints the details of a toy.

Which definition of the Toy class adds a valid layer of abstraction to the class hierarchy?

- A**
- ```
public abstract class Toy{
 public abstract int calculatePrice(Toy t);
 public void printToy(Toy t) { /* code goes here */ }
}
```
- B**
- ```
public abstract class Toy {
    public int calculatePrice(Toy t) ;
    public void printToy(Toy t) ;
}
```
- C**
- ```
public abstract class Toy {
 public int calculatePrice(Toy t);
 public final void printToy(Toy t){ /* code goes here */ }
}
```
- D**
- ```
public abstract class Toy {
    public abstract int calculatePrice(Toy t) { /* code goes here */ }
    public abstract void printToy(Toy t) { /* code goes here */ }
}
```

- A. Option A
B. Option B
C. Option C
D. Option D

Answer: A

NEW QUESTION 5

Given the code fragment:

```
public static void main (String[] args) {
    String[] arr = ("Hi", "How", "Are", "You");
    List<String> arrList = new ArrayList<>(Arrays.asList(arr);
    if (arrList.removeIf((String s) -> (return s.length() <= 2;))) {
        System.out.println(s + "removed")'
    }
}
```

What is the result?

- A. Compilation fails.
B. Hi removed
C. An UnsupportedOperationException is thrown at runtime.
D. The program compiles, but it prints nothing.

Answer: A

NEW QUESTION 6

Given:

```
public class Test {
    public static void main(String[] args) {
        int x = 1;
        int y = 0;
        if(x++ > ++y) {
            System.out.print("Hello ");
        } else {
            System.out.print("Welcome ");
        }
        System.out.print("Log " + x + ":" + y);
    }
}
```

What is the result?

- A. Hello Log 1:0
- B. Hello Log 2:1
- C. Welcome Log 2:1
- D. Welcome Log 1:0

Answer: C

NEW QUESTION 7

Given the code fragment:

```
int x = 100;
int a = x++;
int b = ++x;
int c = x++;
int d = (a < b) ? (a < c) ? a: (b < c) ? b: c: x;
System.out.println(d);
```

What is the result?

- A. 100
- B. 101
- C. 102
- D. 103
- E. Compilation fails

Answer: E

NEW QUESTION 8

Given the code fragment:

```
public static void main(String[] args) {
    int data[] = {2010, 2013, 2014, 2015, 2014};
    int key = 2014;
    int count = 0;
    for (int e: data) {
        if (e != key) {
            continue;
            count++;
        }
    }
    System.out.print(count + " Found");
}
```

What is the result?

- A. Compilation fails.
- B. 0 Found
- C. 1 Found
- D. 3 Found

Answer: A

NEW QUESTION 9

Given:


```
public class Test {
    public static void main(String[] args) {
        Test ts = new Test();
        System.out.print(isAvailable + " ");
        isAvailable= ts.doStuff();
        System.out.println(isAvailable);
    }
    public static boolean doStuff() {
        return !isAvailable;
    }
    static boolean isAvailable = true;
}
```

What is the result?

- A. Compilation fails.
- B. false true
- C. true false
- D. true true
- E. false false

Answer: C

Explanation:

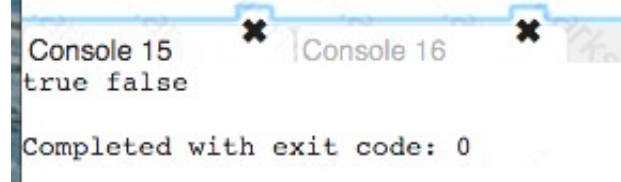

NEW QUESTION 10

Given the code fragment:

```
public static void main(String[] args) {
    ArrayList<Integer> points = new ArrayList<>();
    points.add(1);
    points.add(2);
    points.add(3);
    points.add(4);
    points.add(null);
    points.remove(1);
    points.remove(null);
    System.out.println(points);
}
```

What is the result?

- A. A NullPointerException is thrown at runtime
- B. [1, 2, 4]
- C. [1, 2, 4, null]
- D. [1, 3, 4, null]
- E. [1, 3, 4]
- F. Compilation fails.

Answer: B

NEW QUESTION 10

Given the code fragment:

```
int n [][] = {{1, 3}, {2, 4}};
for (int i = n.length-1; i >= 0; i--) {
    for (int y : n[i]) {
        System.out.print (y);
    }
}
```

What is the result?

- A. 1324
- B. 2313
- C. 3142
- D. 4231

Answer: D

NEW QUESTION 12

Given:

```
public class App {
    int count;
    public static void displayMsg() {
        System.out.println("Welcome Visit Count: " + count++); // line n1
    }
    public static void main(String[] args) {
        App.displayMsg();
        displayMsg(); // line n2
    }
}
```

What is the result?

- A. Welcome Visit Count:0Welcome Visit Count: 1
- B. Compilation fails at line n2.
- C. Compilation fails at line n1.
- D. Welcome Visit Count:0Welcome Visit Count: 0

Answer: C

Explanation:

```

1
2 public class App {
3     int count;
4     public static void displayMsg() {
5         System.out.println("Welcome Visit Count: " + count ++); //line n1
6     }
7     public static void main(String[] args) {
8         App.displayMsg();
9         displayMsg();
10    }
11 }
12

```

NEW QUESTION 15

This grid shows the state of a 2D array:

0	0	
	X	0
X		X

The grid is created with this code:

```

char[][] grid = new char[3][3];
grid[1][1] = 'X';
grid[0][0] = '0';
grid[2][0] = 'X';
grid[0][1] = '0';
grid[2][2] = 'X';
grid[1][2] = '0';
//line n1

```

Which line of code, when inserted in place of //line n1, adds an X into the grid so that the grid contains three consecutive Xs?

- A. grid[2][1] = 'X';
- B. grid[3][2] = 'X';
- C. grid[3][1] = 'X';
- D. grid[2][3] = 'X';

Answer: D

NEW QUESTION 16

Given:

```

interface Readable {
    public void readBook();
    public void setBookMark();
}

abstract class Book implements Readable {    // line n1
    public void readBook() { }
    // line n2
}

class EBook extends Book {                    // line n3
    public void readBook() { }
    // line n4
}

```

And given the code fragment: Book book1 = new EBook(); book1.readBook();

Which option enables the code to compile?

- ☐ A) Replace the code fragment at line n1 with:
class Book implements Readable {
- ☐ B) At line n2 insert:
public abstract void setBookMark();
- ☐ C) Replace the code fragment at line n3 with:
abstract class EBook extends Book {
- ☐ D) At line n4 insert:
public void setBookMark() { }

A. Option A

- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 18

Which three statements are true about exception handling? (Choose three.)

- A. Only unchecked exceptions can be rethrown.
- B. All subclasses of the RuntimeException class are not recoverable.
- C. The parameter in a catch block is of Throwable type.
- D. All subclasses of the RuntimeException class must be caught or declared to be thrown.
- E. All subclasses of the RuntimeException class are unchecked exceptions.
- F. All subclasses of the Error class are not recoverable.

Answer: BCD

NEW QUESTION 22

Given the code fragment:

```
7.  StringBuilder sb1 = new StringBuilder("Duke");
8.  String str1 = sb1.toString();
9.  // insert code here
10. System.out.print(str1 == str2);
```

Which code fragment, when inserted at line 9, enables the code to print true?

- A. String str2 = str1;
- B. String str2 = new String(str1);
- C. String str2 = sb1.toString();
- D. String str2 = "Duke";

Answer: A

NEW QUESTION 26

Given the code fragment:

```
public static void main(String[] args) {
    String myStr = "Hello World ";
    myStr.trim();
    int i1 = myStr.indexOf(" ");
    System.out.println(i1);
}
```

What is the result?

- A. An exception is thrown at runtime.
- B. -1
- C. 5
- D. 10

Answer: A

NEW QUESTION 28

Which two code fragments cause a compilation error? (Choose two.)

- A. float flt = 100.00F;
- B. float flt = (float) 1_11.00;
- C. Float flt = 100.00;
- D. double y1 = 203.22;float flt = y1;
- E. int y2 = 100;float flt = (float) y2 ;

Answer: AD

NEW QUESTION 30

What is the name of the Java concept that uses access modifiers to protect variables and hide them within a class?

- A. Encapsulation
- B. Inheritance
- C. Abstraction
- D. Instantiation
- E. Polymorphism

Answer: A

Explanation:

Using the private modifier is the main way that an object encapsulates itself and hide data from the outside world.

NEW QUESTION 32

Given the code fragment:

```
public static void main(String[] args) {
    StringBuilder sb = new StringBuilder("Java");
    String s = "Java";

    if (sb.toString().equals(s.toString())) {
        System.out.println("Match 1");
    } else if (sb.equals(s)) {
        System.out.println("Match 2");
    } else {
        System.out.println("No Match");
    }
}
```

What is the result?

- A. Match 1
- B. Match 2
- C. No Match
- D. A NullPointerException is thrown at runtime.

Answer: A

NEW QUESTION 37

Given:

```
class Student {
    String name;
    public Student(String name) {
        this.name = name;
    }
}

public class Test {
    public static void main(String[] args) {
        Student[] students = new Student[3];
        students[1] = new Student("Richard");
        students[2] = new Student("Donald");
        for (Student s : students) {
            System.out.println("" + s.name);
        }
    }
}
```

What is the result?

- A. nullRichardDonald
- B. RichardDonald
- C. Compilation fails.
- D. An ArrayIndexOutOfBoundsException is thrown at runtime.
- E. A NullPointerException is thrown at runtime.

Answer: E

NEW QUESTION 41

Given the code fragment:

```
3. public static void main(String[] args) {
4.     int x = 6;
5.     while (isAvailable(x)) {
6.         System.out.print(x);
7.
8.     }
9. }
10.
11. public static boolean isAvailable(int x) {
12.     return --x > 0 ? true : false;
13. }
```

Which modification enables the code to print 54321?

- A. Replace line 6 with System.out.print (--x);
- B. At line 7, insert x --;
- C. Replace line 5 with while (is Available(--x)) {
- D. Replace line 12 with return (x > 0) ? false : true;

Answer: C

NEW QUESTION 43

Given:

```
class Vehicle {
    int x;
    Vehicle(){
        this(10); // line n1
    }
    Vehicle(int x) {
        this.x = x;
    }
}

class Car extends Vehicle {
    int y;
    Car() {
        super();
        this(20); // line n2
    }
    Car(int y) {
        this.y = y;
    }
    public String toString() {
        return super.x + ":" + this.y;
    }
}
```

And given the code fragment:

And given the code fragment:

```
Vehicle y = new Car();
System.out.println(y);
```

What is the result?

- A. 10:20
- B. 0:20
- C. Compilation fails at line n1
- D. Compilation fails at line n2

Answer: D

NEW QUESTION 48

Given the code fragment:

```
if (aVar++ < 10) {
    System.out.println(aVar + " Hello Universe!");
} else {
    System.out.println(aVar + " Hello World!");
}
```

What is the result if the integer aVar is 9?

- A. Compilation fails.
- B. 10 Hello Universe!
- C. 10 Hello World!
- D. 9 Hello World!

Answer: B

NEW QUESTION 51

Given:

```
public class App {
    public static void main(String[] args) {
        int i = 10;
        int j = 20;
        int k = (j += i) / 5;
        System.out.print(i + " : " + j + " : " + k);
    }
}
```

What is the result?

- A. 10 : 30 : 6

- B. 10 : 22 : 22
- C. 10 : 22 : 20
- D. 10 : 22 : 6

Answer: A

NEW QUESTION 53

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

1z0-808 Practice Exam Features:

- * 1z0-808 Questions and Answers Updated Frequently
- * 1z0-808 Practice Questions Verified by Expert Senior Certified Staff
- * 1z0-808 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 1z0-808 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 1z0-808 Practice Test Here](#)